



TAOGLAS®



Datasheet

Genesis MA240 - 3-in-1

Part No:
MA240.LBI.001

Description:

1* GNSS – GPS-GLONASS-GALILEO
2* 4G LTE - 698 to 896/1710 to 2700MHz
Supports 3G Fall-back

Features:

IP65 Rated Waterproof Antenna
1* GNSS 1m RG-174 with SMA(M) connector
2 * LTE 1m Low loss TGC-200 with SMA(M) connector
Dimensions: 205.8mm x 58mm x 12.4mm
RoHS and REACH Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	10
4. Radiation Patterns	19
5. Mechanical Drawing	28
6. Packaging	29
7. Application Note	30
<hr/>	
Changelog	44

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas Genesis MA.240 is high performance 3-in1 GNSS and 4G MIMO, low profile, adhesive mount antenna. It is an omni-directional and fully IP65 waterproof for use in external M2M applications in telematics, transportation and remote monitoring applications worldwide. It is designed to be mounted directly on glass or plastic in the interior of vehicles.

Typical applications include:

- HD Video over LTE
- First Responder and Emergency Services
- Automotive Vehicle Tracking and Telematics

The unique MA240 antenna delivers powerful dual antenna technology for worldwide 4G bands at 700MHz / 800MHz / 1700MHz / 1800MHz / 2600MHz, plus GPS/GLONASS/GALILEO for next generation location accuracy. 4G wireless applications demand high speed data uplink and downlink. High efficiency and high gain antennas are necessary to achieve the required signal to noise ratio and throughput required to solve these challenges.

Taoglas also takes care to have high isolation between the two 4G antennas to prevent self-interference. Low loss cables are used to keep efficiency high over long cable lengths. In contrast, smaller LTE antennas with poorer quality thinner cables will have much reduced efficiency and isolation, which would lead to a large drop in system throughput or drops, and may indeed not make a system connection at all. The GPS/GLONASS/GALILEO antenna has been carefully designed to work equally well on both GPS and GLONASS bands, leading to higher location accuracy and stability of tracking in urban environments.

Finally, if your device requires USA LTE certification with an external antenna then the MA240 is the ideal solution to pass approvals. Cable length and connector types are customizable. Contact your regional Taoglas sales office for support.

2. Specifications

GPS-GLONASS-GALILEO	
Center Frequency	GPS/GALILEO:1575.42±3 MHz GLONASS:1602±0.5 MHz
Passive Antenna Gain	GPS/GALILEO: 1.67dBi GLONASS: 0.37dBi
VSWR	1.5:1 Max
Impedance	50Ω
LNA Electrical Properties	
Center Frequency	GPS/GALILEO:1575.42±3 MHz GLONASS:1602±0.5 MHz
Impedance	50 Ohm
VSWR	< 1.5:1
Return Loss	10 dB Min.
Gain	3.3V 30dB
DC Power Input	3.3V
Noise Figure @3.3V	1.7dB

MECHANICAL	
Antenna Dimensions	205.8 x 58 x 12.4mm
Housing	PC+ABS Alloy
Ingress Protection Rating	IP65
Weight	250g
Cable	GNSS: 1m RG-174/ Cellular 1 and 2: 1m TGC-200
Connector	SMA(M)ST
ENVIRONMENTAL	
Operation Temperature	-40°C to 80°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

4G / 3G MIMO 1									
Frequency (MHz)	698 ~803	824 ~894	880 ~960	1710 ~1880	1850 ~1990	1920 ~2170	2490 ~2690	3410 ~3490	
Efficiency (%)									
In free space	30cm	58.24	56.13	53.67	76.47	68.59	62.96	74.88	56.10
	1M	64.65	57.39	48.73	62.52	53.06	48.63	50.84	30.29
	2M	51.90	46.53	46.74	62.79	55.87	51.48	59.06	42.12
	3M	47.88	45.93	43.42	55.53	49.19	45.01	50.66	35.40
	5M	41.47	38.78	36.45	43.44	38.00	34.87	38.49	25.38
On the 2mm ABS base	30cm	63.50	33.06	39.97	69.58	59.05	54.39	61.78	39.33
	1M	73.97	51.78	44.03	63.30	48.55	46.18	52.15	27.82
	2M	56.60	29.34	34.82	57.11	48.11	44.46	48.71	29.50
	3M	53.49	27.18	32.32	50.22	44.24	38.88	41.62	30.25
	5M	45.23	22.87	27.09	39.51	32.73	30.11	31.75	17.78
On the glass base	30cm	66.98	26.43	29.96	63.52	59.22	60.07	71.14	38.27
	1M	52.66	47.32	35.07	53.47	52.02	50.64	64.75	29.52
	2M	59.70	23.27	26.09	52.25	48.25	49.10	56.09	28.70
	3M	57.47	21.58	23.80	46.05	42.08	42.68	47.91	26.90
	5M	47.72	18.28	20.30	36.15	32.78	33.26	36.55	17.29
Average Gain(dBi)									
In free space	30cm	-2.37	-2.71	-2.88	-1.17	-1.67	-2.04	-1.27	-2.53
	1M	-1.92	-2.46	-3.24	-2.05	-2.83	-3.19	-2.96	-5.19
	2M	-2.87	-3.52	-3.48	-2.03	-2.55	-2.91	-2.30	-3.78
	3M	-3.22	-3.56	-3.81	-2.56	-3.11	-3.50	-2.97	-4.53
	5M	-3.85	-4.31	-4.56	-3.63	-4.23	-4.61	-4.16	-5.98
On the 2mm ABS base	30cm	-2.01	-4.90	-4.04	-1.59	-2.32	-2.65	-2.10	-4.05
	1M	-1.32	-2.92	-3.62	-2.03	-3.21	-3.41	-2.85	-5.56
	2M	-2.51	-5.42	-4.64	-2.44	-3.21	-3.53	-3.13	-5.30
	3M	-2.75	-5.74	-4.97	-3.00	-3.58	-4.11	-3.82	-5.26
	5M	-3.49	-6.50	-5.73	-4.04	-4.89	-5.22	-4.99	-7.50
On the glass base	30cm	-1.88	-5.81	-5.27	-2.02	-2.29	-2.22	-1.48	-4.17
	1M	-2.95	-3.28	-4.57	-2.81	-2.87	-2.98	-1.90	-5.30
	2M	-2.38	-6.36	-5.87	-2.88	-3.18	-3.09	-2.52	-5.42

	3M	-2.51	-6.69	-6.29	-3.43	-3.78	-3.70	-3.20	-5.73
	5M	-3.36	-7.41	-6.96	-4.48	-4.86	-4.79	-4.38	-7.62
Peak Gain(dBi)									
In free space	30cm	1.57	1.71	1.59	3.04	3.41	3.21	4.82	4.81
	1M	2.41	2.17	1.33	2.00	2.14	1.94	2.16	1.29
	2M	1.07	0.83	0.99	2.19	2.52	2.33	3.78	3.56
	3M	0.74	0.85	0.66	1.65	1.96	1.75	3.14	2.81
	5M	0.10	0.11	-0.09	0.59	0.84	0.64	1.92	1.36
On the 2mm ABS base	30cm	3.44	-0.13	0.28	2.23	2.06	2.09	2.56	2.44
	1M	2.26	0.96	0.89	1.98	2.03	2.04	2.58	0.93
	2M	2.94	-0.50	-0.32	1.38	1.17	1.22	1.53	1.19
	3M	2.75	-0.83	-0.58	0.75	0.69	0.59	0.84	1.11
	5M	1.96	-1.73	-1.41	-0.22	-0.50	-0.47	-0.33	-1.01
On the glass base	30cm	2.66	-1.47	-0.30	3.37	2.59	2.92	5.87	3.50
	1M	0.85	1.65	-0.30	1.95	2.45	2.45	4.25	-0.01
	2M	2.16	-2.19	-0.90	2.51	1.70	2.05	4.84	2.25
	3M	2.10	-2.51	-1.43	2.09	1.11	1.31	4.16	0.65
	5M	1.18	-3.07	-1.99	0.91	0.02	0.35	2.98	0.05

4G / 3G MIMO 2									
Frequency (MHz)		698 ~803	824 ~894	880 ~960	1710 ~1880	1850 ~1990	1920 ~2170	2490 ~2690	3410 ~3490
Efficiency (%)									
In free space	30cm	72.01	45.99	34.09	73.58	68.59	33.44	63.58	38.76
	1M	70.55	56.19	39.21	66.54	52.25	45.40	59.01	33.16
	2M	64.18	42.21	29.69	60.55	33.71	27.32	50.17	29.20
	3M	59.38	37.78	27.57	53.47	29.71	23.89	42.78	24.46
	5M	51.25	31.84	23.14	41.89	22.94	18.50	32.70	17.59
On the 2mm ABS base	30cm	65.93	36.48	26.86	60.26	38.12	30.54	56.90	32.33
	1M	71.92	52.85	31.51	62.46	48.02	42.26	59.79	34.38
	2M	58.76	34.28	23.40	49.55	31.05	24.95	44.87	24.37
	3M	56.15	31.80	21.72	44.39	29.14	22.18	38.32	20.40
	5M	46.95	25.27	18.25	34.28	21.13	16.89	29.24	14.68
On the glass base	30cm	43.02	18.05	11.86	37.76	27.71	27.15	58.38	30.74
	1M	49.79	15.28	8.64	38.20	35.24	37.66	63.96	32.37
	2M	38.34	17.81	10.33	31.05	22.58	22.19	46.02	23.13
	3M	36.20	16.54	9.59	27.82	20.43	18.90	39.31	18.78
	5M	30.66	12.52	8.06	21.48	15.35	15.02	29.99	13.94
Average Gain(dBi)									
In free space	30cm	-1.46	-3.39	-4.75	-1.44	-1.67	-4.84	-1.98	-4.45
	1M	-1.52	-2.53	-4.23	-1.82	-2.84	-3.49	-2.31	-4.98
	2M	-1.96	-3.76	-5.35	-2.29	-4.79	-5.72	-3.01	-5.70
	3M	-2.30	-4.25	-5.68	-2.83	-5.34	-6.30	-3.70	-6.45
	5M	-2.94	-4.99	-6.43	-3.89	-6.47	-7.41	-4.87	-7.90
On the 2mm ABS base	30cm	-1.86	-4.41	-5.79	-2.24	-4.27	-5.21	-2.46	-5.34
	1M	-1.44	-2.83	-5.26	-2.10	-3.21	-3.79	-2.25	-4.80
	2M	-2.36	-4.67	-6.39	-3.10	-5.16	-6.09	-3.49	-6.59
	3M	-2.54	-5.00	-6.72	-3.57	-5.45	-6.61	-4.18	-7.34
	5M	-3.34	-6.01	-7.47	-4.70	-6.84	-7.78	-5.35	-8.79
On the glass base	30cm	-3.76	-7.54	-9.36	-4.28	-5.59	-5.70	-2.35	-5.32
	1M	-3.12	-8.39	-10.74	-4.24	-4.55	-4.27	-1.95	-4.90
	2M	-4.26	-7.59	-9.96	-5.13	-6.48	-6.58	-3.38	-6.57

	3M	-4.51	-7.92	-10.29	-5.61	-6.92	-7.25	-4.07	-7.53
	5M	-5.24	-9.14	-11.05	-6.73	-8.16	-8.27	-5.24	-8.77
Peak Gain(dBi)									
In free space	30cm	3.61	1.20	-0.05	3.31	3.41	-0.63	3.01	0.43
	1M	2.84	2.15	0.02	2.61	1.74	1.08	3.26	-0.68
	2M	3.11	0.98	-0.65	2.46	-0.33	-1.50	1.98	-0.82
	3M	2.78	0.35	-0.98	1.92	-0.89	-2.09	1.28	-1.57
	5M	2.14	-0.40	-1.74	0.86	-2.01	-3.19	0.12	-3.02
On the 2mm ABS base	30cm	3.09	-0.25	-0.95	2.34	0.42	-0.30	2.97	-0.92
	1M	2.30	2.38	-0.13	2.12	1.09	0.81	3.11	-0.32
	2M	2.59	-0.57	-1.55	1.49	-0.47	-1.17	1.94	-2.17
	3M	2.49	-0.90	-1.88	1.08	-0.77	-1.79	1.26	-2.92
	5M	1.62	-1.85	-2.64	-0.11	-2.15	-2.87	0.08	-4.37
On the glass base	30cm	1.04	-3.36	-5.33	0.57	-0.37	0.31	3.15	0.82
	1M	0.78	-3.92	-6.55	1.42	0.67	1.21	4.22	1.80
	2M	0.54	-3.22	-5.93	0.99	-1.26	-0.57	2.12	-0.43
	3M	0.27	-3.55	-6.25	-0.72	-1.76	-1.37	1.43	-0.97
	5M	-0.43	-4.96	-7.01	-1.89	-2.94	-2.26	0.26	-2.63

LTE BANDS				
Band	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
	Uplink	Downlink	MIMO 1	MIMO 2
1	UL: 1920 to 1980	DL: 2110 to 2170	x	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓
5	UL: 824 to 849	DL: 869 to 894	✓	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓	✓
8	UL: 880 to 915	DL: 925 to 960	x	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	x	x
12	UL: 699 to 716	DL: 729 to 746	✓	✓
13	UL: 777 to 787	DL: 746 to 756	✓	✓
14	UL: 788 to 798	DL: 758 to 768	✓	✓
17	UL: 704 to 716	DL: 734 to 746	✓	✓
18	UL: 815 to 830	DL: 860 to 875	✓	✓
19	UL: 830 to 845	DL: 875 to 890	✓	✓
20	UL: 832 to 862	DL: 791 to 821	✓	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	x	x
22	UL: 3410 to 3490	DL: 3510 to 3590	x	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	x	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓
26	UL: 814 to 849	DL: 859 to 894	✓	✓
27	UL: 807 to 824	DL: 852 to 869	✓	✓
28	UL: 703 to 748	DL: 758 to 803	✓	✓
29	UL: -	DL: 717 to 728	✓	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	x	x
32	UL: -	DL: 1452 – 1496	x	x
35		1850 to 1910	✓	✓
38		2570 to 2620	✓	✓
39		1880 to 1920	✓	✓
40		2300 to 2400	✓	✓
41		2496 to 2690	✓	✓
42		3400 to 3600	x	✓
43		3600 to 3800	x	x

*Covered bands represent an efficiency greater than 20%

3. Antenna Characteristics

3.1 GPS-GLONASS-GALILEO Antenna – Test Set-up


H-plane



E-plane




3.2 GPS-GLONASS-GALILEO Return Loss

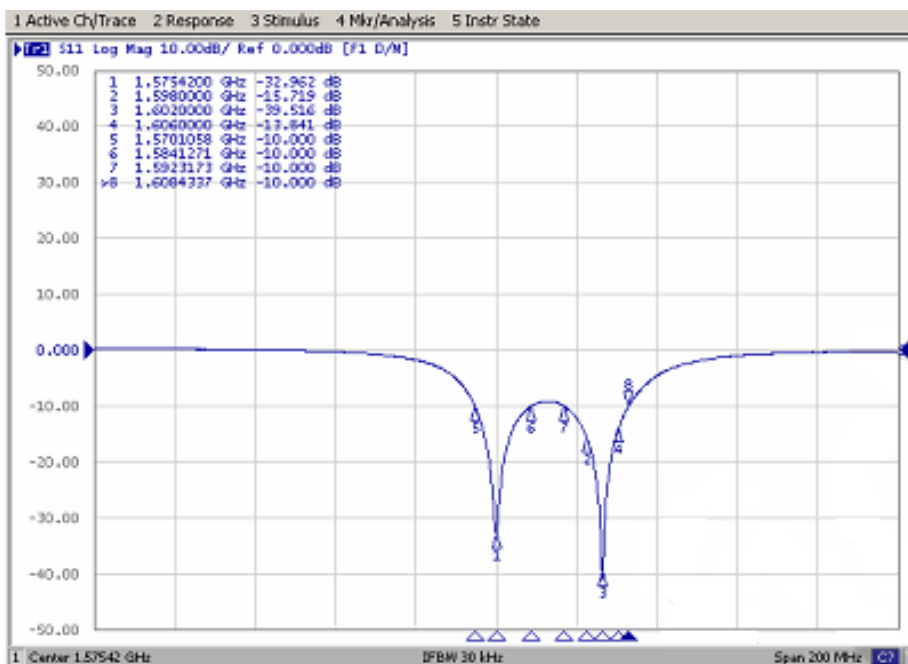


Return Loss : -32.9 dB @ 1575.42MHz, -39.5 dB @ 1602MHz

3.3 GPS-GLONASS-GALILEO Smith Chart

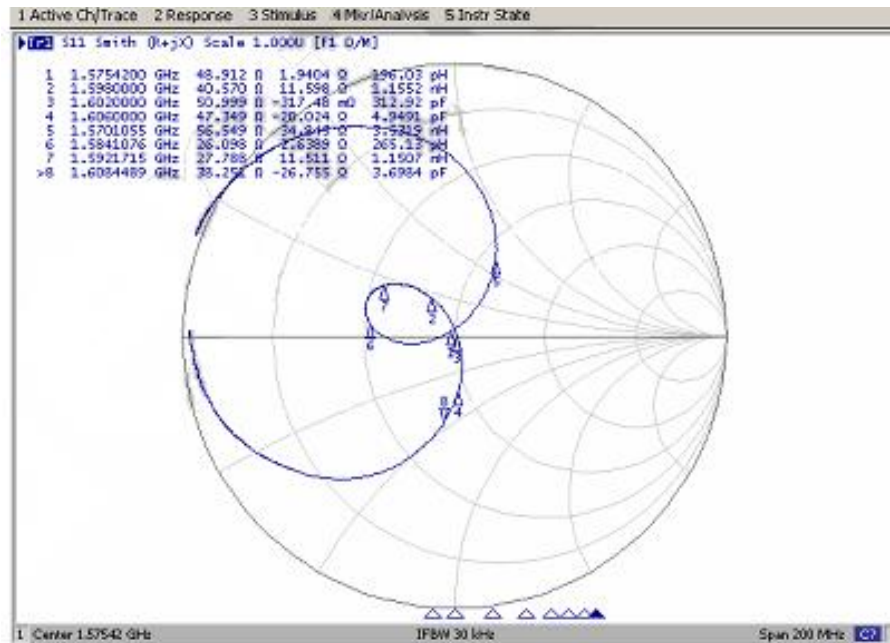


Impedance : 48.9-j1.9 Ohm@ 1575.42MHz, 50.9-j0.3 Ohm@ 1602MHz

3.4 GPS-GLONASS-GALILEO Gain Pattern

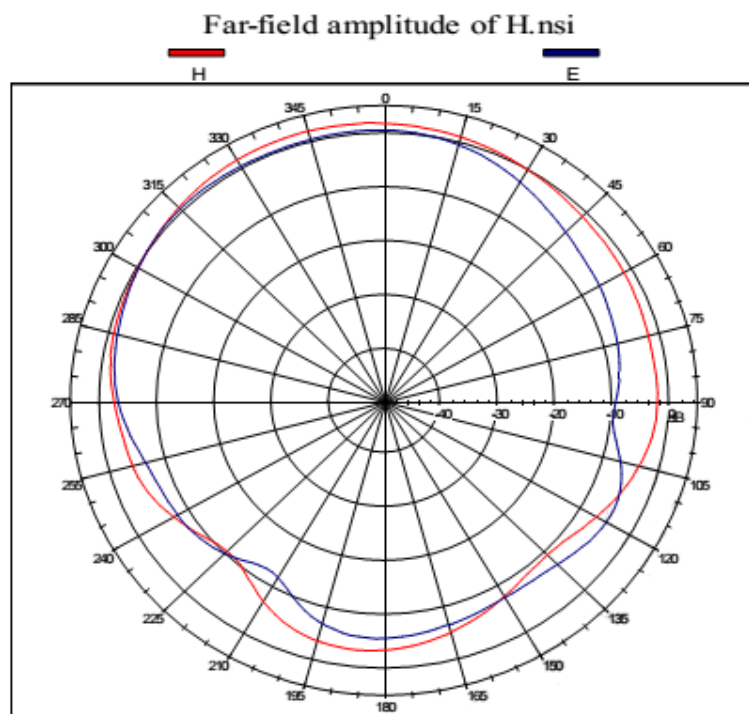

Gain pattern @ 1575.2 MHz

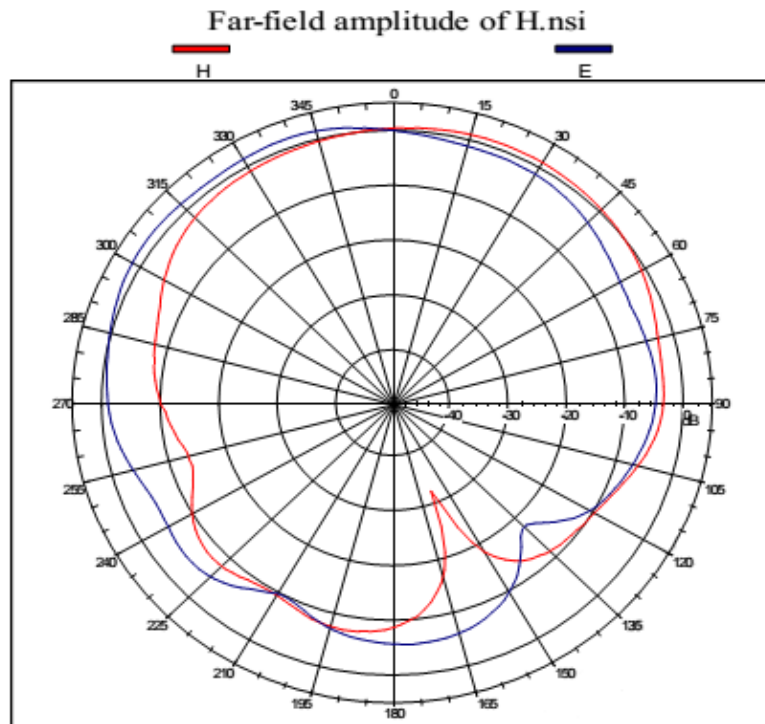


Gain pattern @ 1602 MHz

3.6 Gain Pattern Data

Gain Pattern Data				
Angle (°)	1575.42 MHz		1602 MHz	
	H	E	H	E
-90	-2.65	-3.35	-10.17	-1.12
-76	-0.98	-1.65	-7.82	0.16
-60	-0.15	-0.23	-4.64	1.65
-46	0.94	0.64	-2.01	1.62
-30	1.85	0.49	-0.90	1.59
-16	2.03	0.39	-0.39	1.63
0	1.67	0.44	0.37	-0.10
16	0.82	-0.69	0.90	-1.31
30	-0.23	-2.91	0.89	-1.56
46	-1.38	-5.56	0.16	-3.28
60	-1.90	-6.83	-1.12	-5.34
76	-2.49	-9.09	-3.33	-5.26
90	-2.50	-9.82	-3.93	-5.24

3.7 GPS-GLONASS-GALILEO LNA Noise Figure

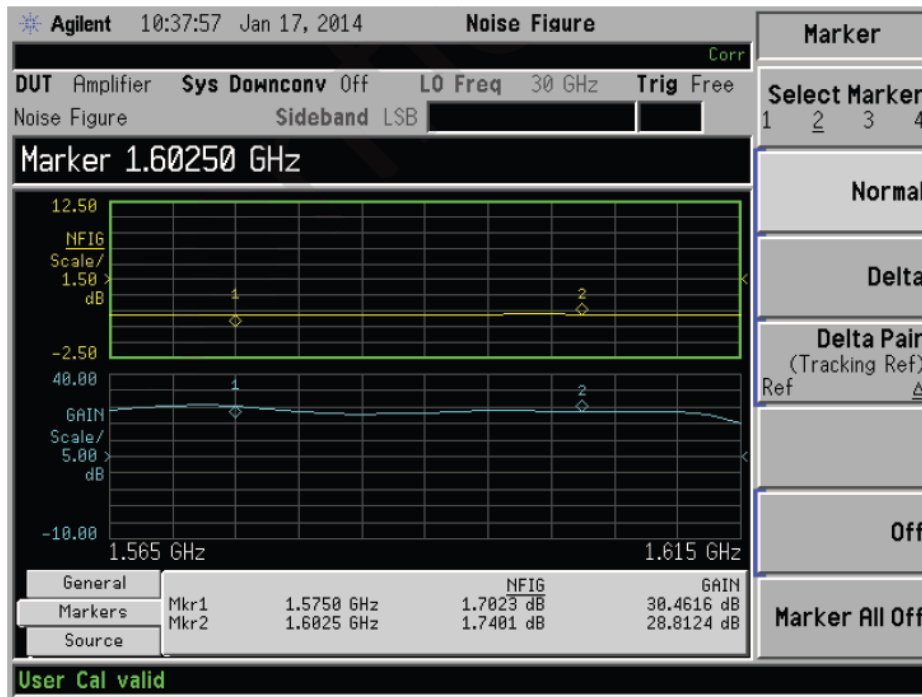


3.8 LTE Antenna - Test Setup


In free space




On 2mm ABS base

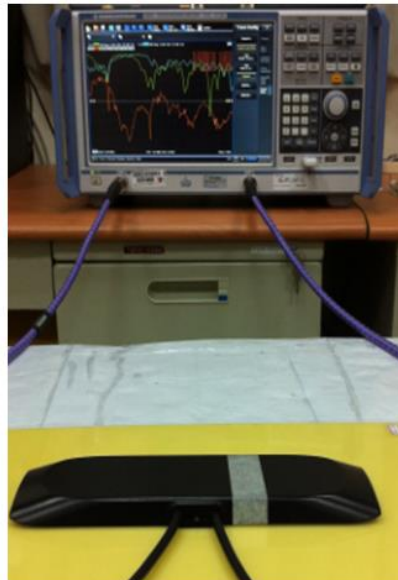


On the glass base

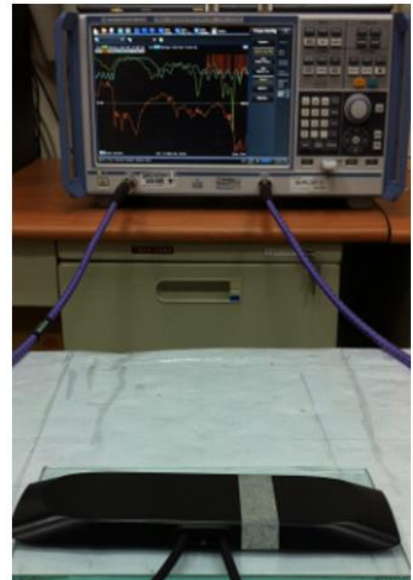


3.9 LTE Antenna Return Loss

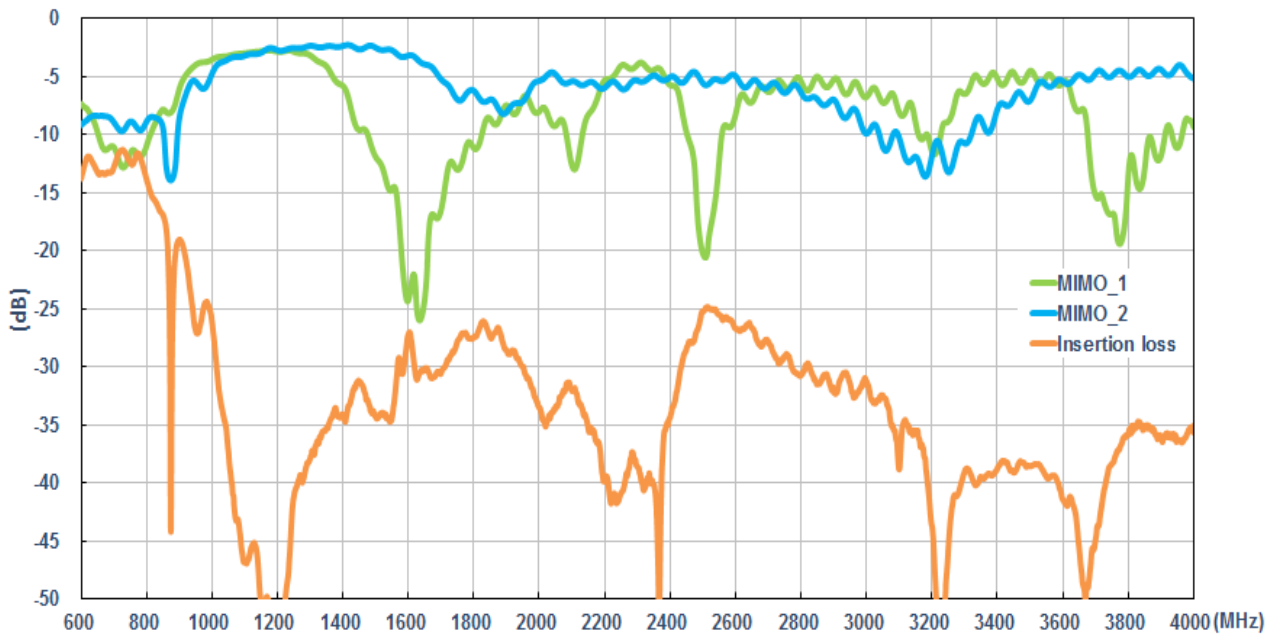

Setup in the free space with 2 meters cable length

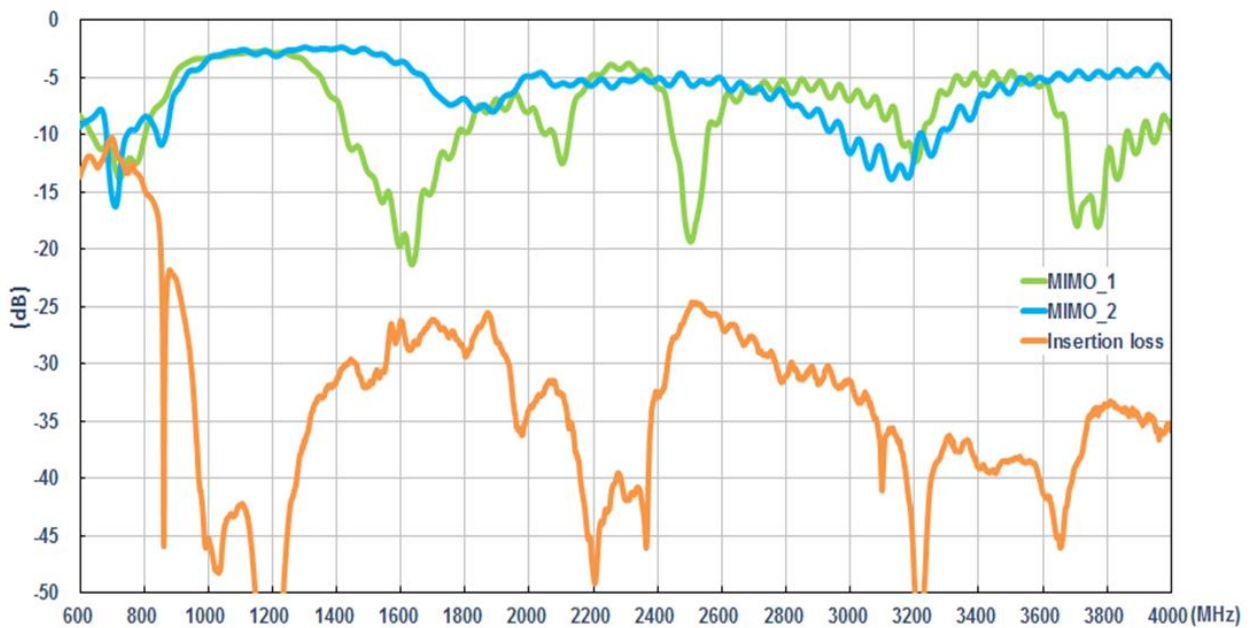



Setup on the 2mm ABS base with 2 meters cable length

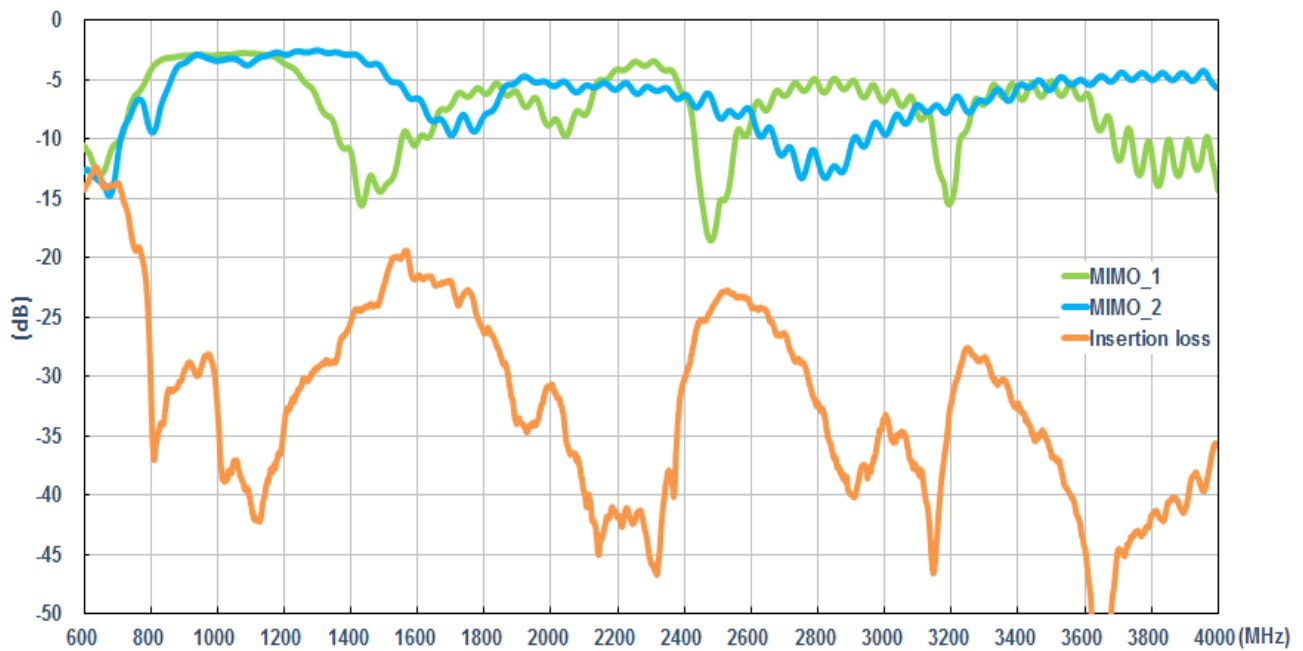

Setup on the glass base with 2 meters cable length


3.10 LTE Antenna Efficiency

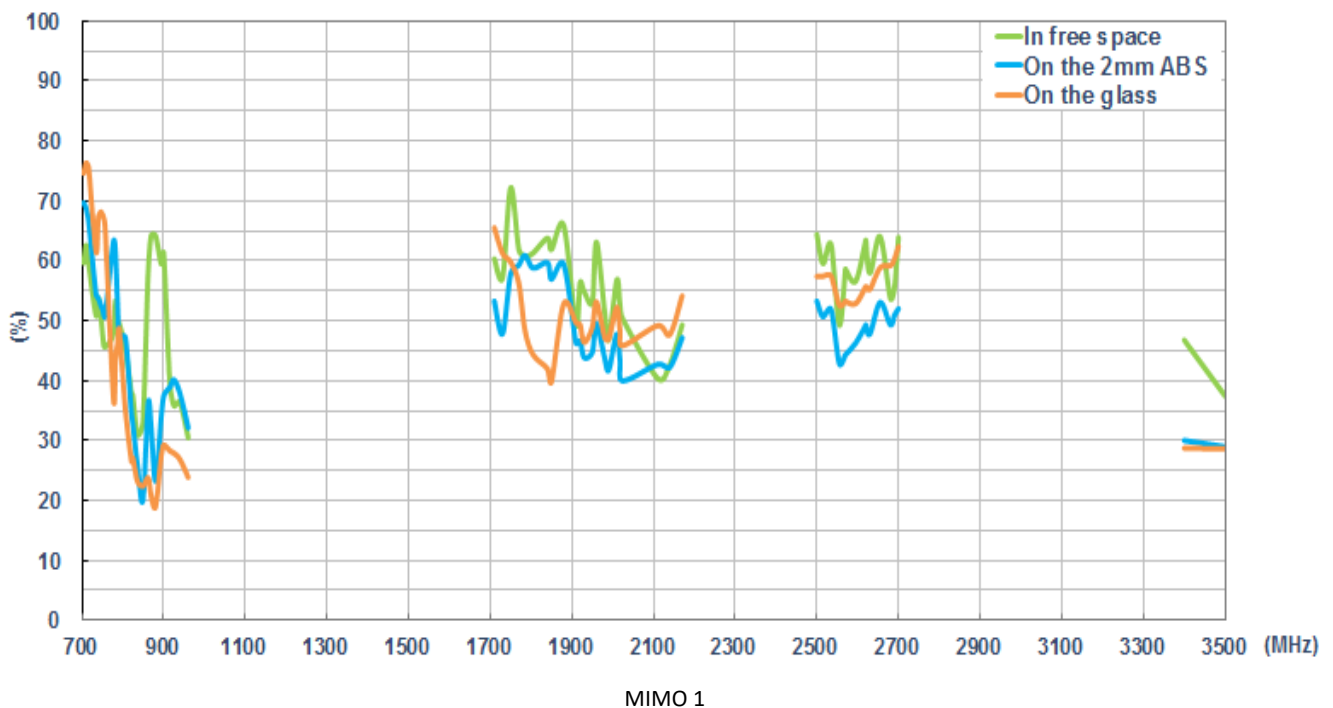

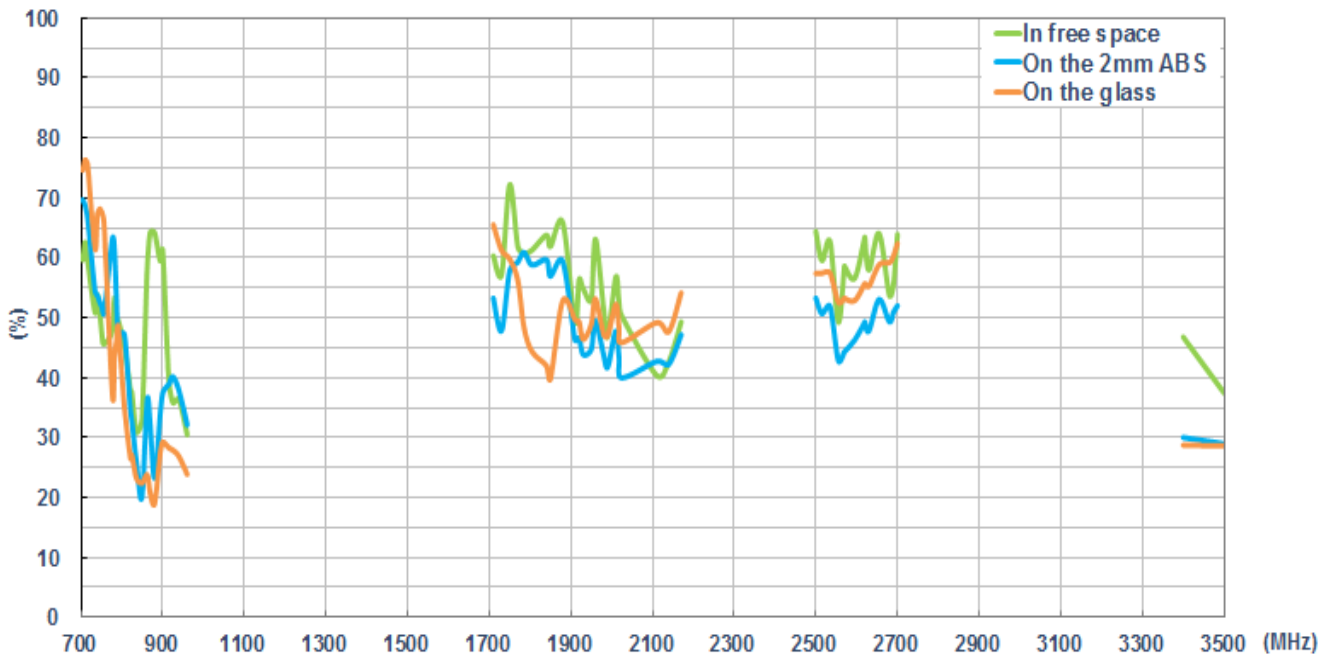


MIMO 2

3.11 LTE Average Gain

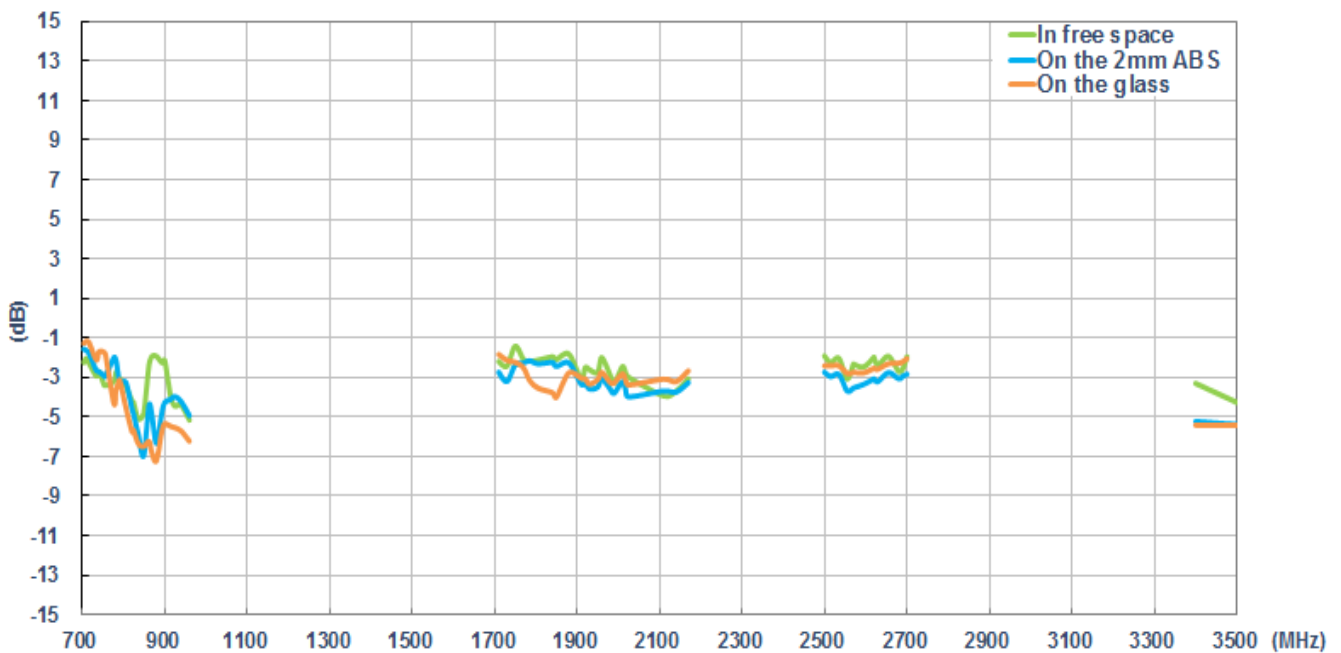


MIMO 1

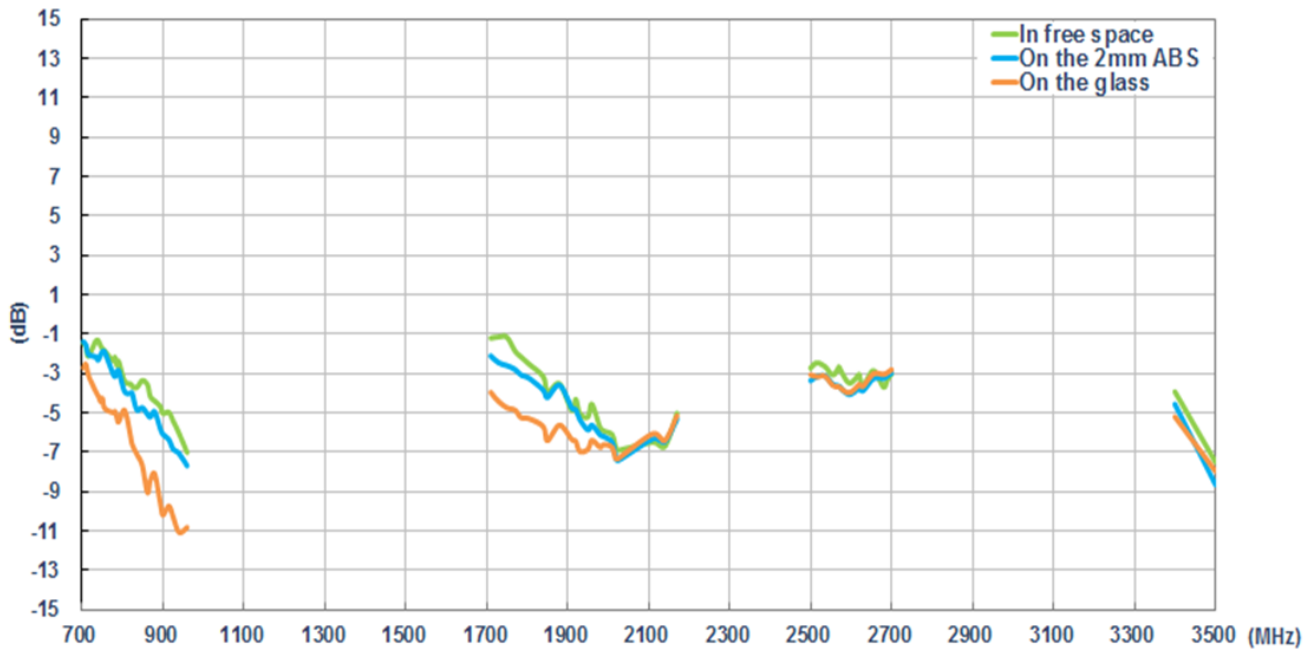


MIMO 2

3.12 LTE Peak Gain

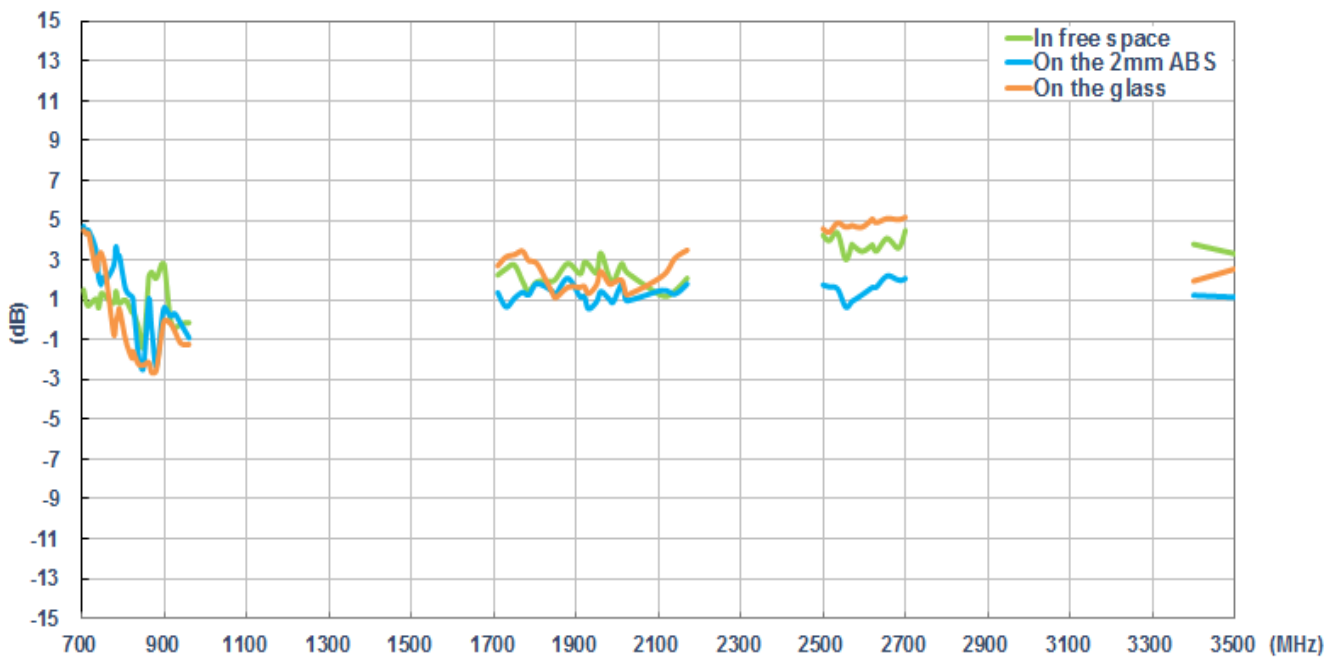


MIMO 1

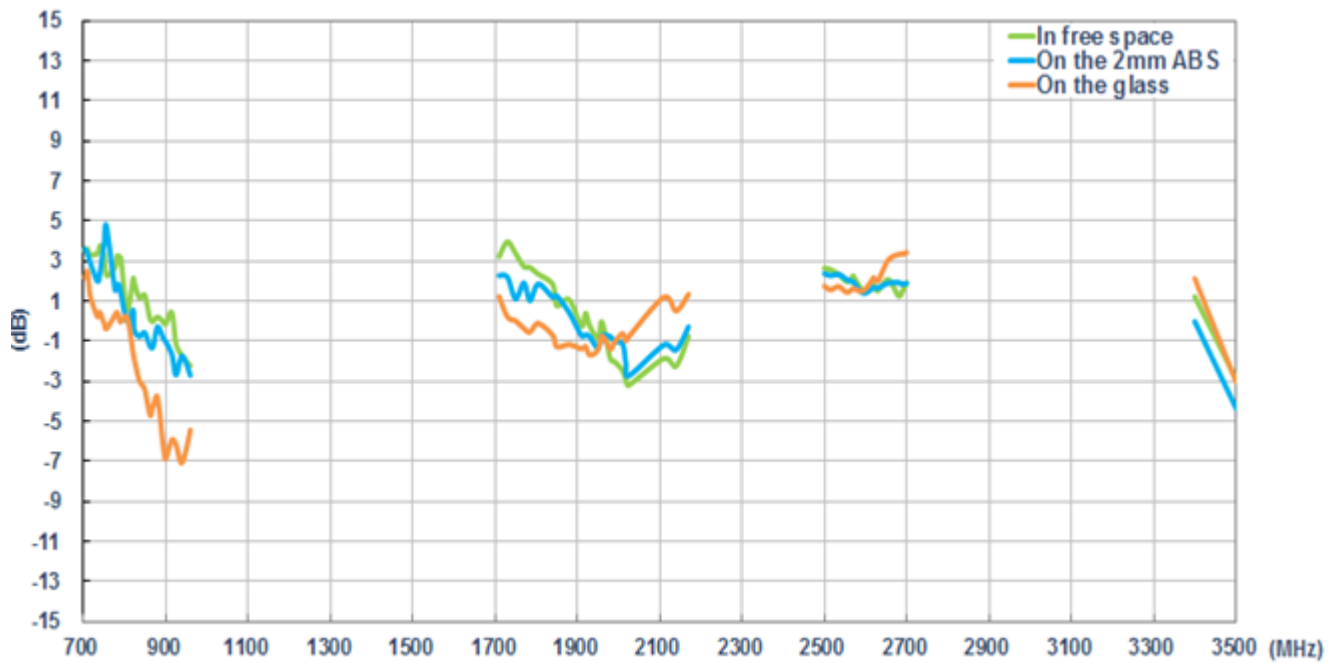

MIMO 2

4. Radiation Patterns

4.6 Test Setup for Antenna Radiation Patterns – In Free Space

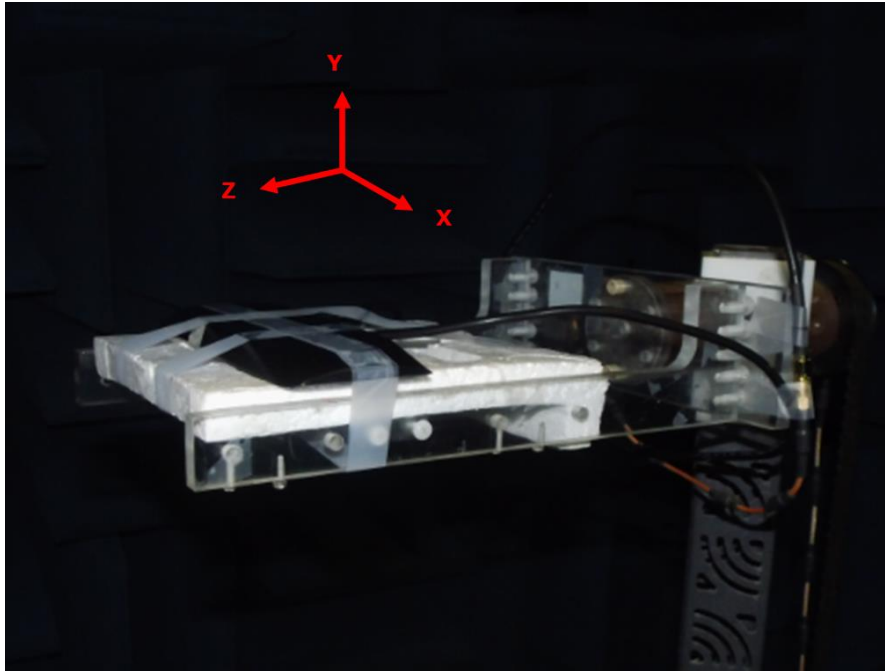


4.7 2D Radiation patterns (Antenna #1 with 2m cable length in free space)

XY Plane

XZ Plane


YZ Plane

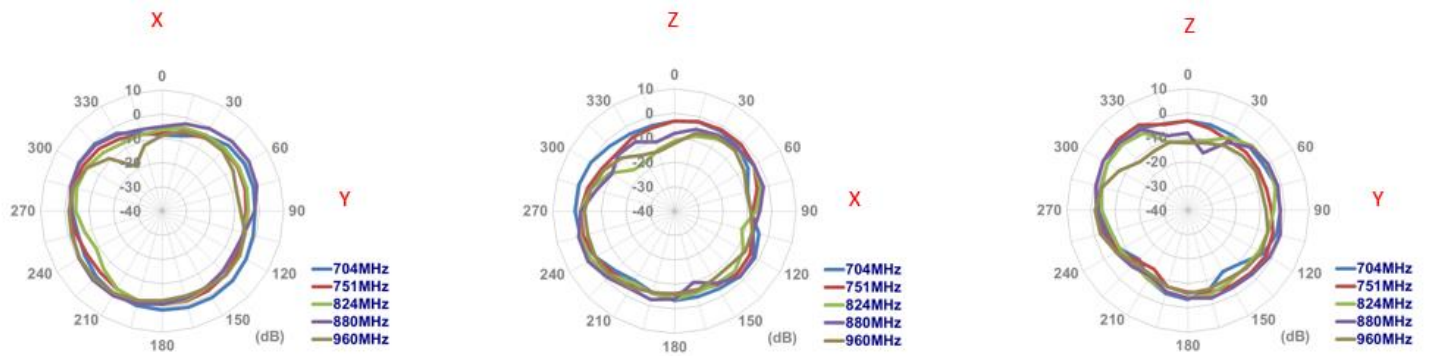

XY Plane

XZ Plane


YZ Plane

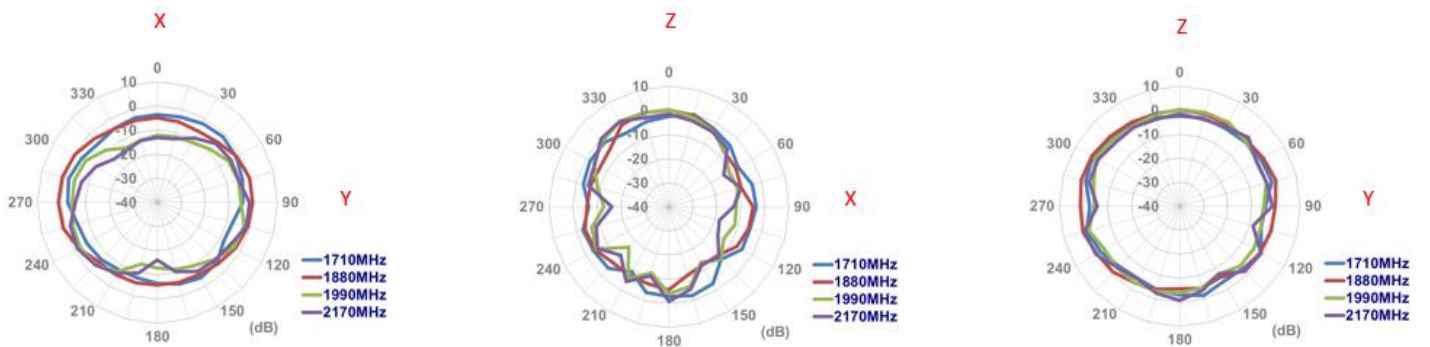

XY Plane

XZ Plane

YZ Plane

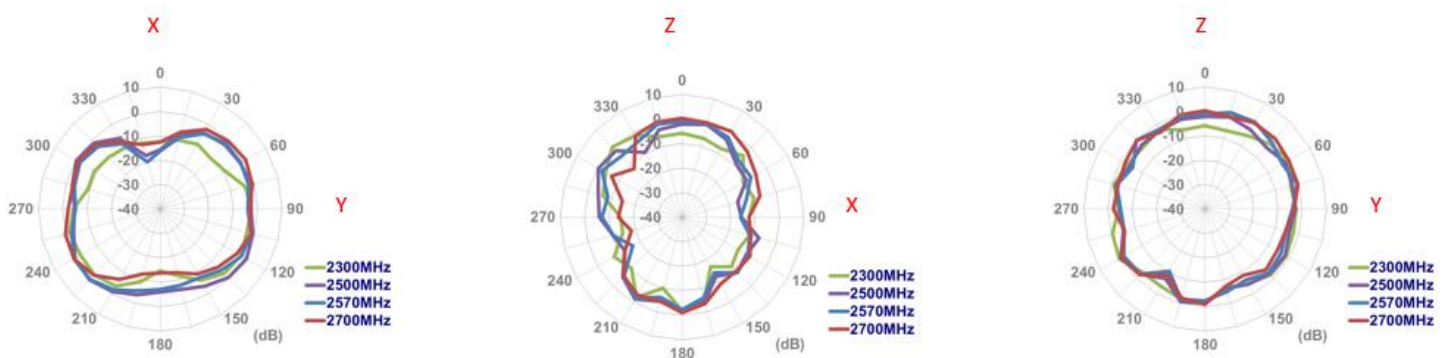


4.8 2D Radiation patterns (Antenna #2 with 2m cable length in free space)

XY Plane

XZ Plane


YZ Plane

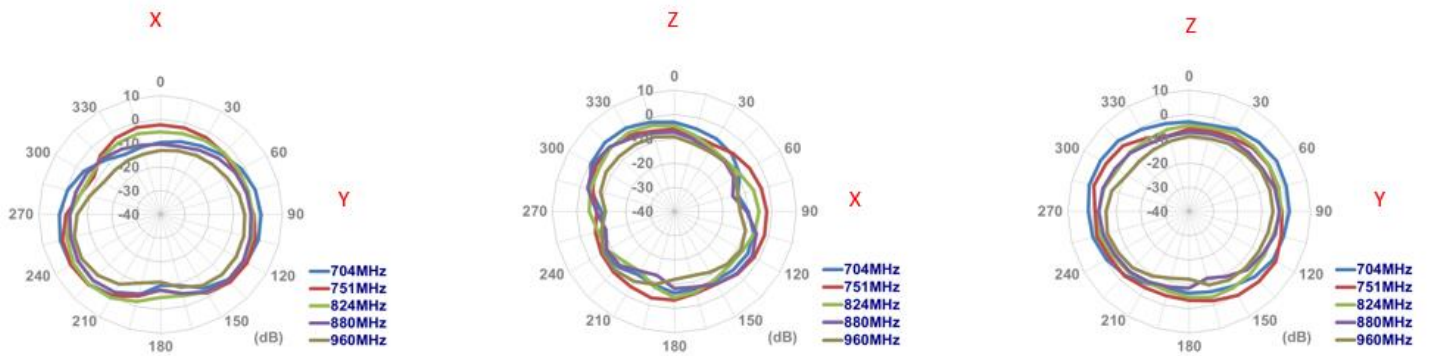

XY Plane

XZ Plane


YZ Plane

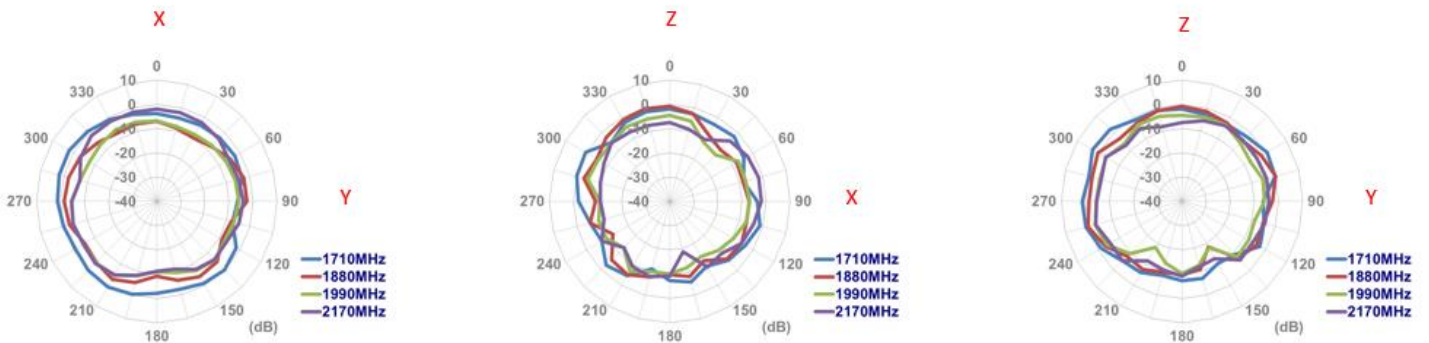


XY Plane

XZ Plane

YZ Plane

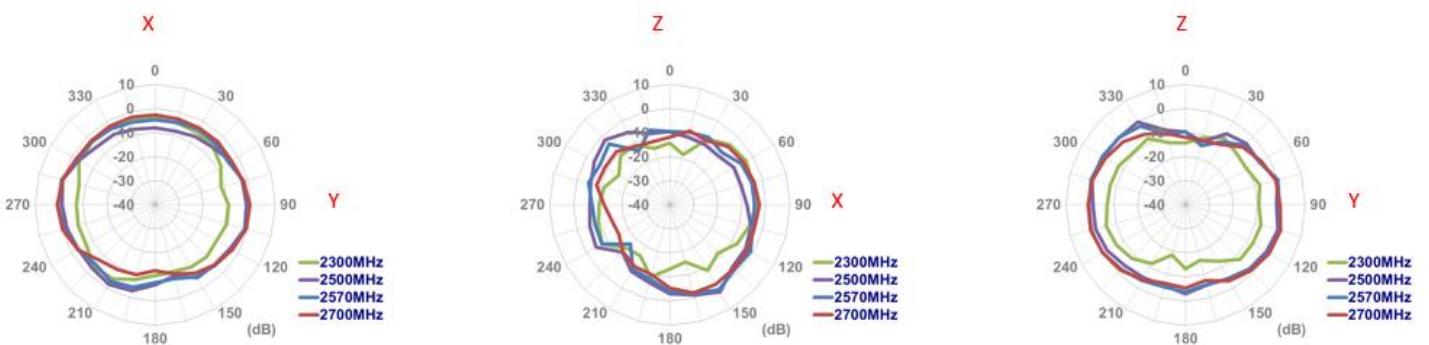

4.9 Test Setup for Antenna Radiation Patterns - On 2mm ABS



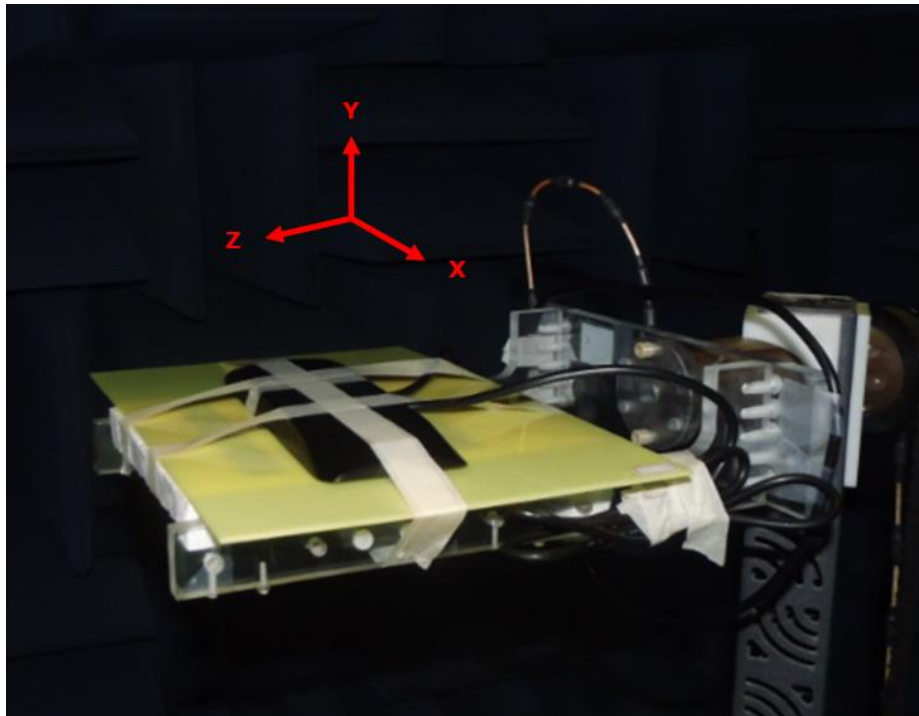


4.10 2D Radiation patterns (Antenna #1 with 2m cable length on the 2mm ABS)

XY Plane

XZ Plane




YZ Plane

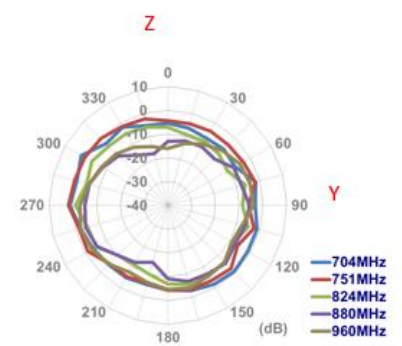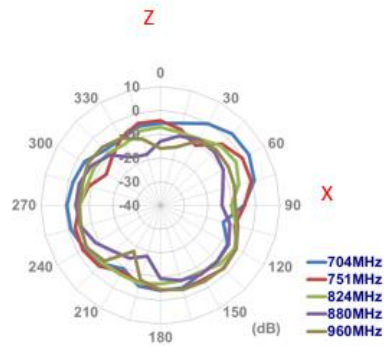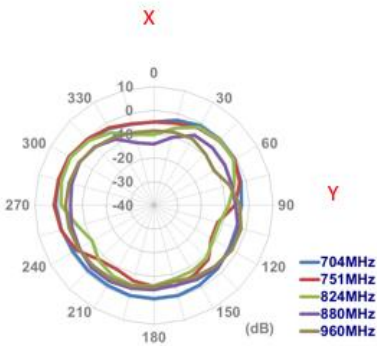

XY Plane

XZ Plane




YZ Plane

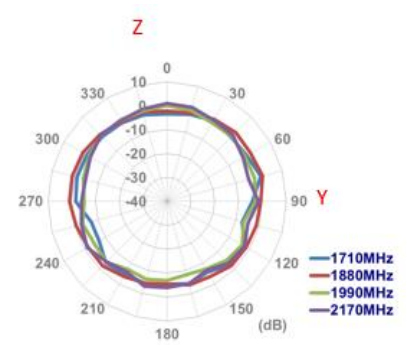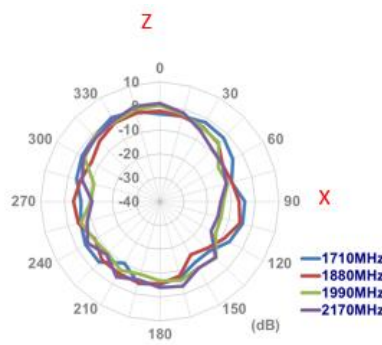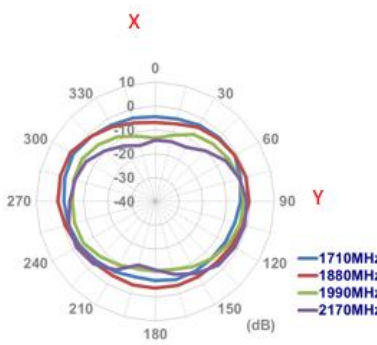

XY Plane

XZ Plane

YZ Plane

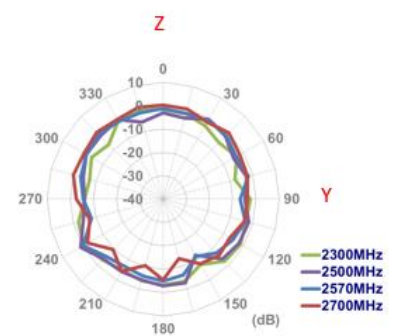
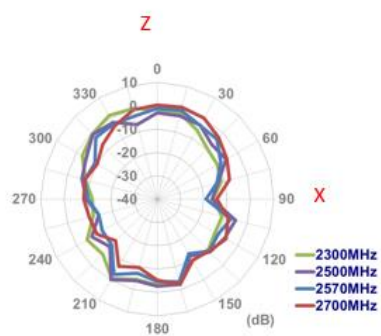
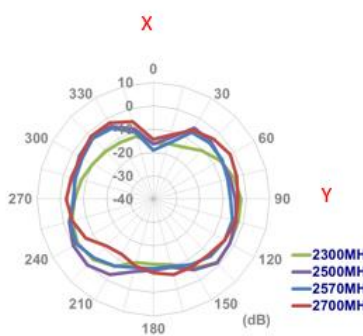


4.11 2D Radiation patterns (Antenna #2 with 2m cable length on 2mm ABS)

XY Plane

XZ Plane




YZ Plane

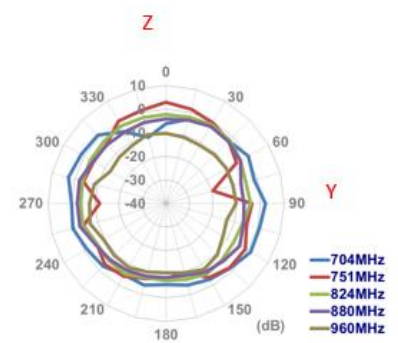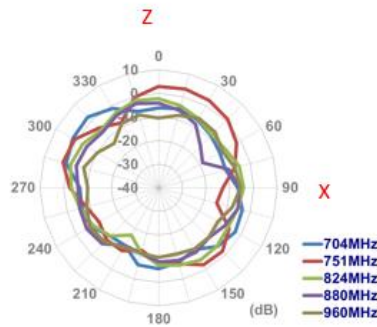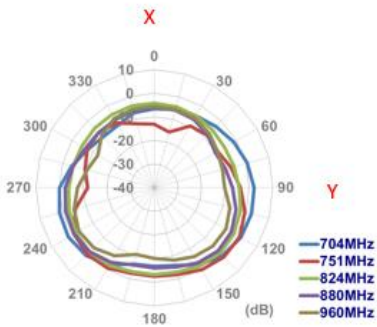

XY Plane

XZ Plane




YZ Plane

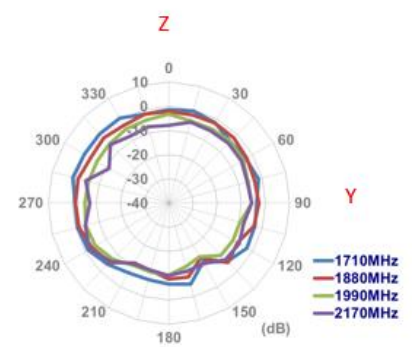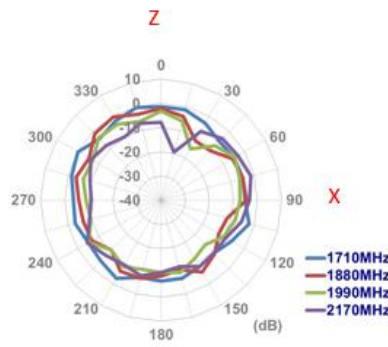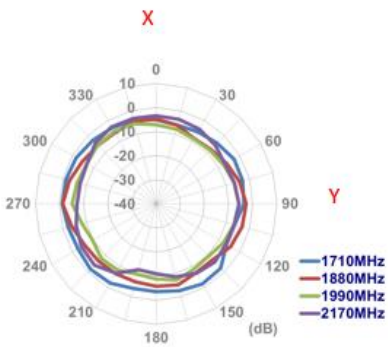


XY Plane

XZ Plane

YZ Plane

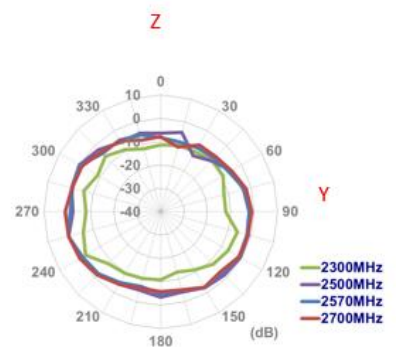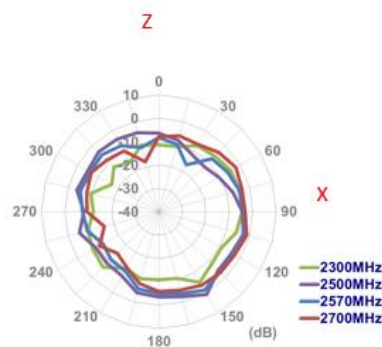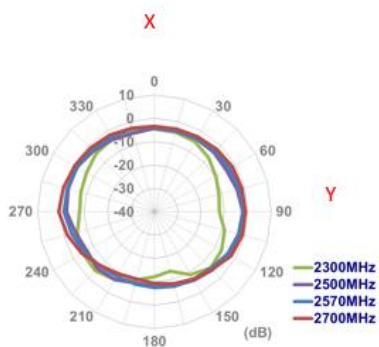

4.12 Test Setup for Antenna Radiation Patterns – On Glass



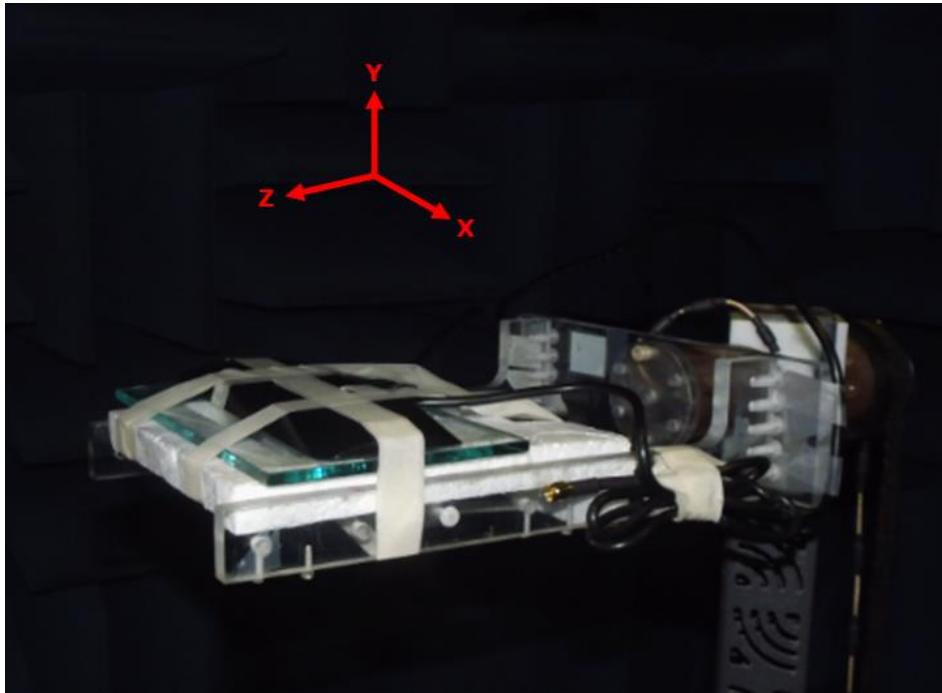


4.13 2D Radiation patterns (Antenna #1 with 2m cable length on the glass)

XY Plane

XZ Plane




YZ Plane

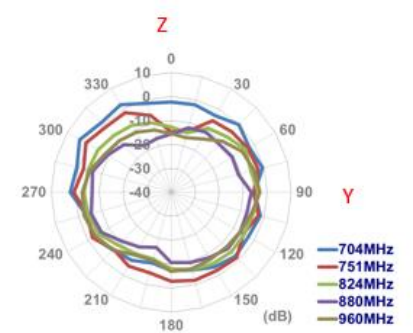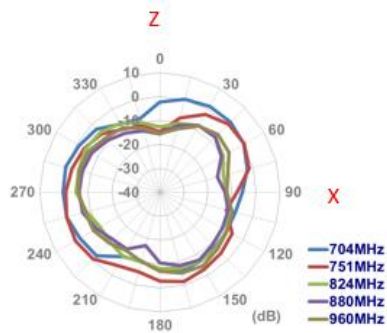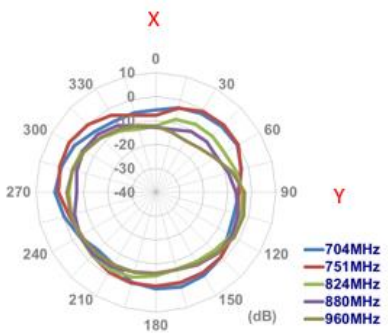

XY Plane

XZ Plane




YZ Plane

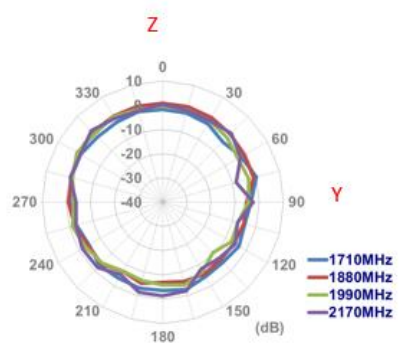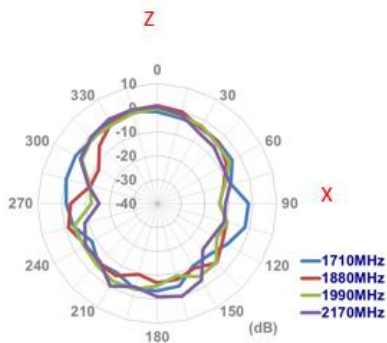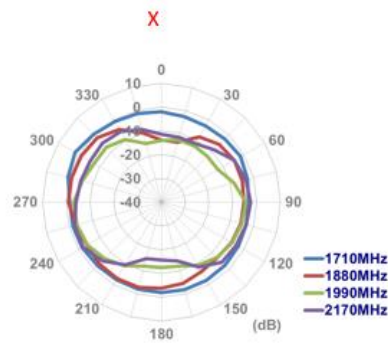

XY Plane

XZ Plane

YZ Plane

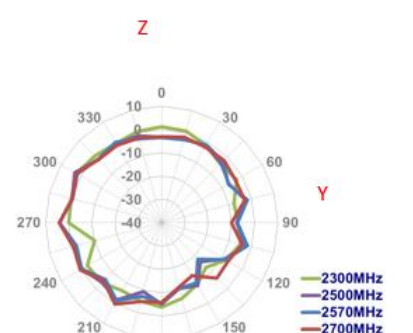
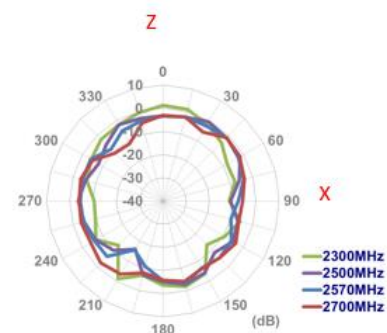
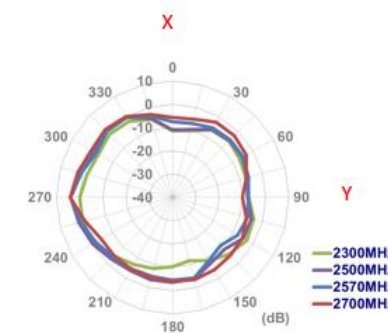


4.14 2D Radiation patterns (Antenna #2 with 2m cable length on the glass)

XY Plane

XZ Plane




YZ Plane

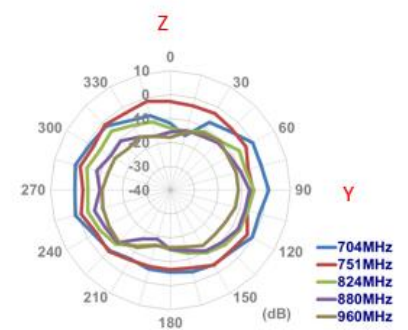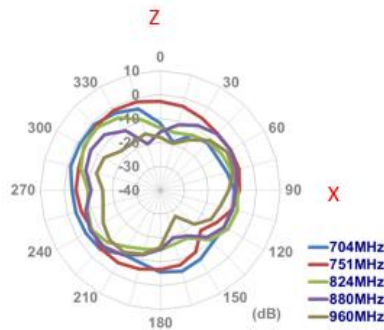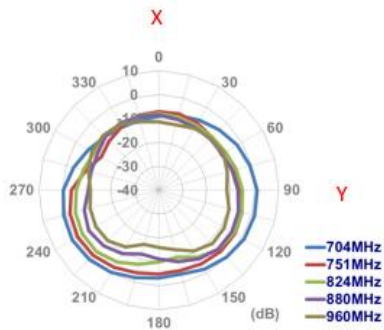

XY Plane

XZ Plane




YZ Plane

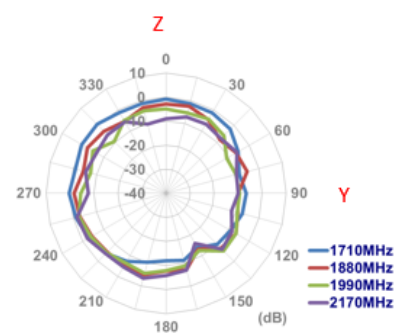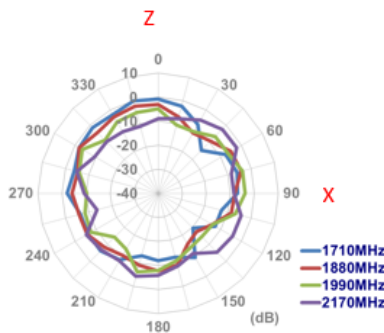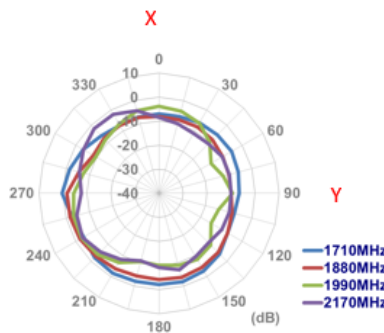


XY Plane

XZ Plane

YZ Plane

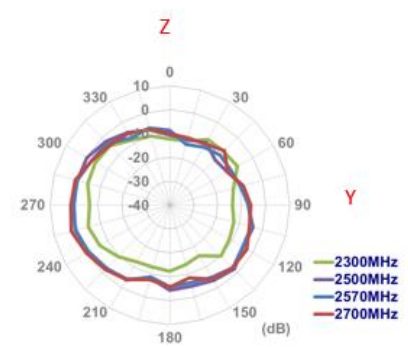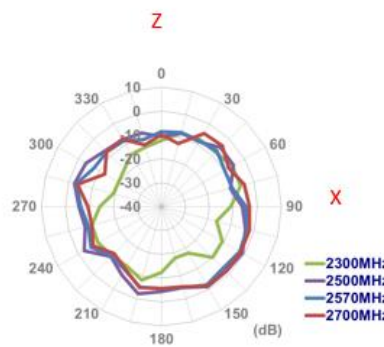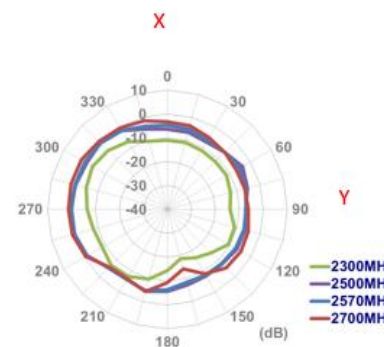


5. Mechanical Drawing (Units: mm)

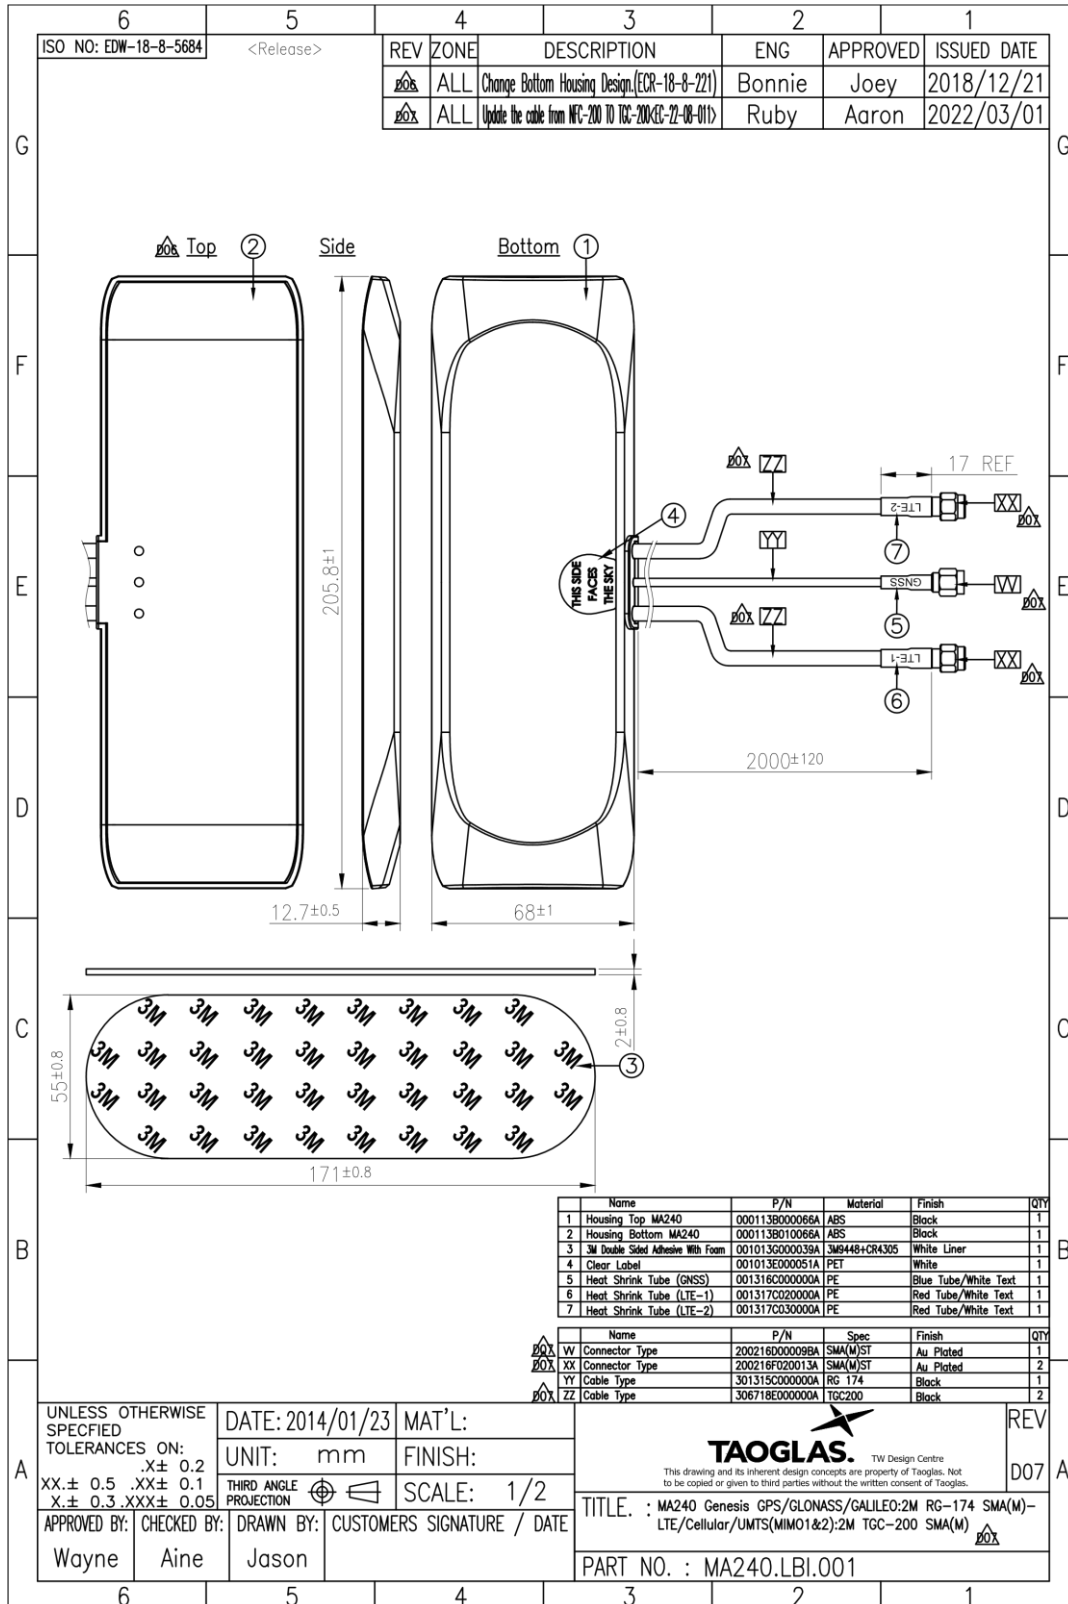


6. Packaging


1pc MA240.LBI.001 per Large PE Bag
 Dimensions: 450*280mm
 Weight: 175g



20pcs MA240.LBI.001 per Carton
 Carton Dimensions: 390*260*230mm
 Weight: 3.5Kg

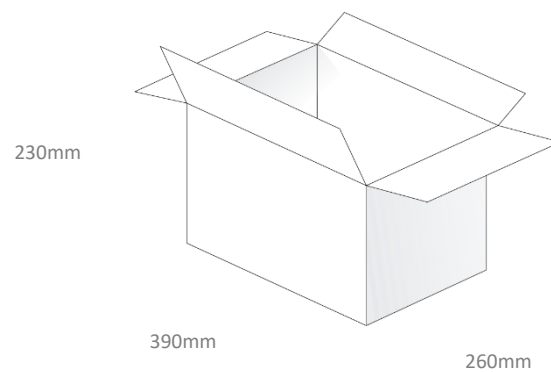


Pallet Dimensions:
 1200*1000*1250mm
 27 Cartons per Pallet
 9 Cartons per layer, 3 Layers

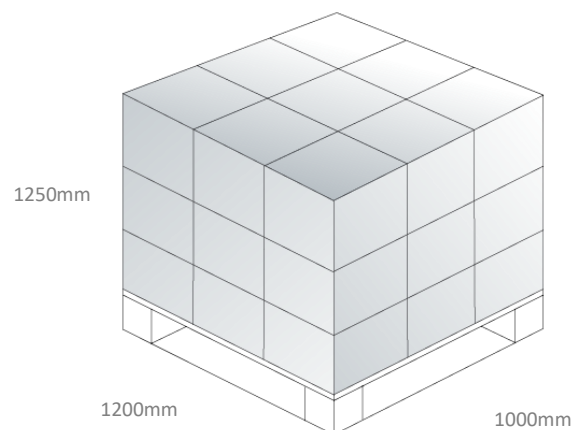


7. Application Note (LTE Antenna)

The MA240 antenna measurement with difference cable length and difference environments, the performance is shown as below.


7.1 In Freespace

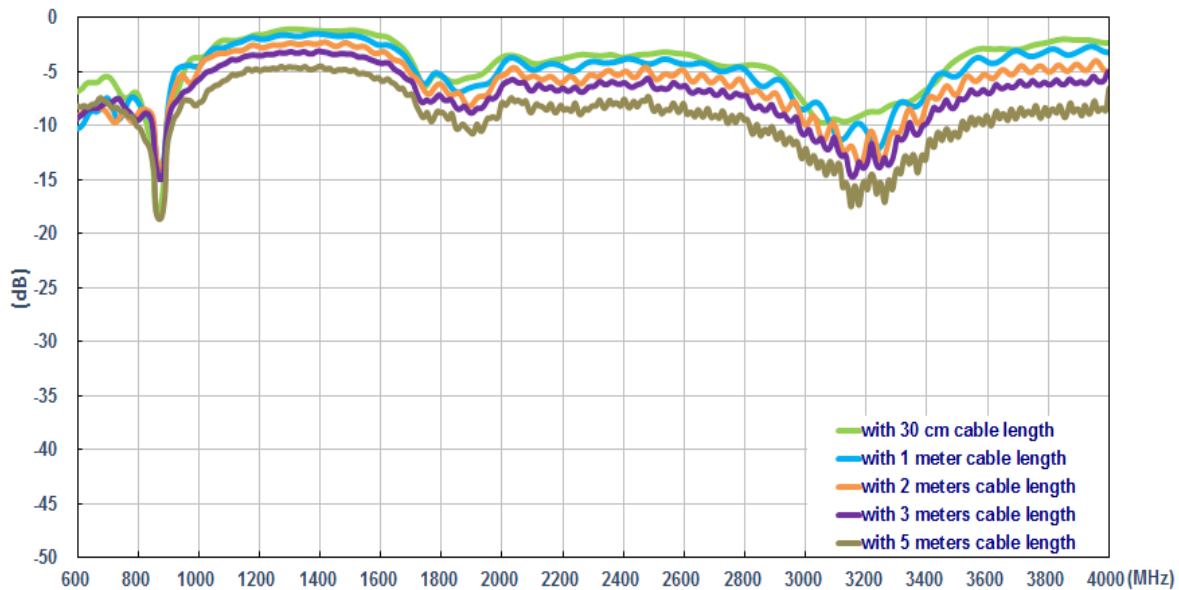


Return loss (ANTENNA_1 in free space)

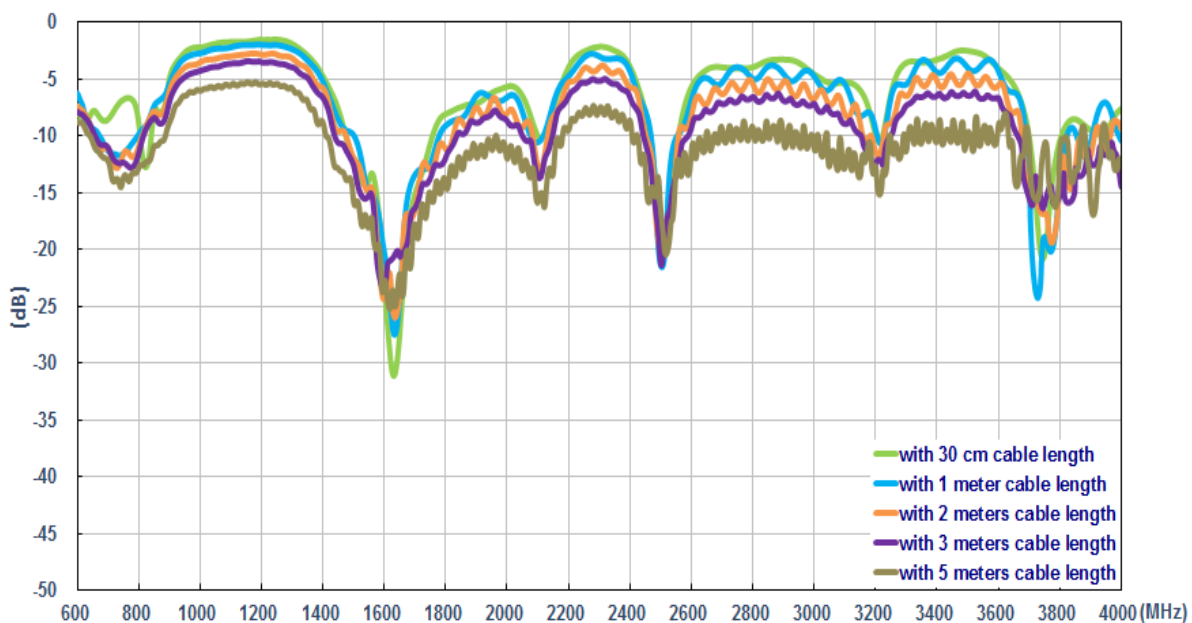


Return loss (ANTENNA_2 in free space)

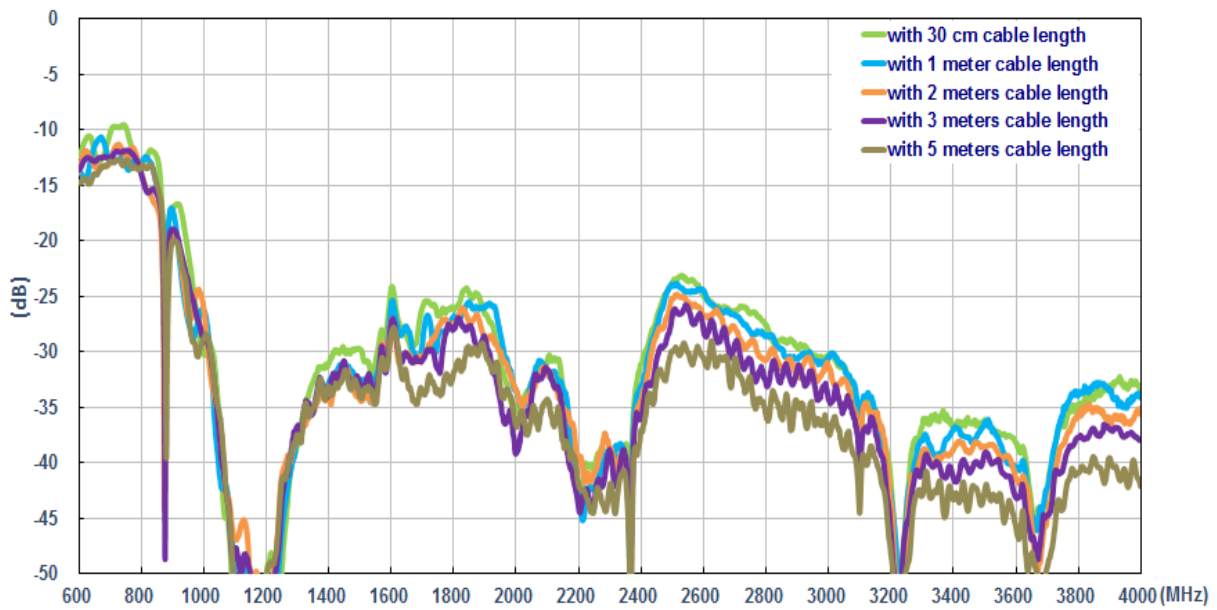


Insertion loss (in free space)

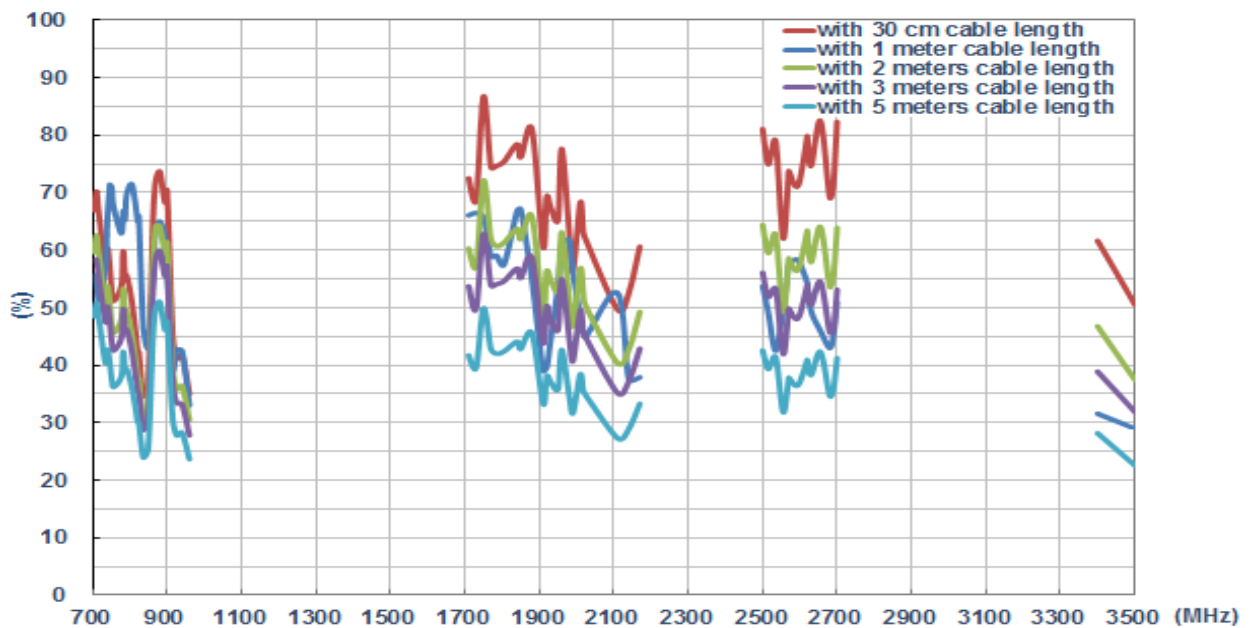


Efficiency (ANTENNA_1 in free space)

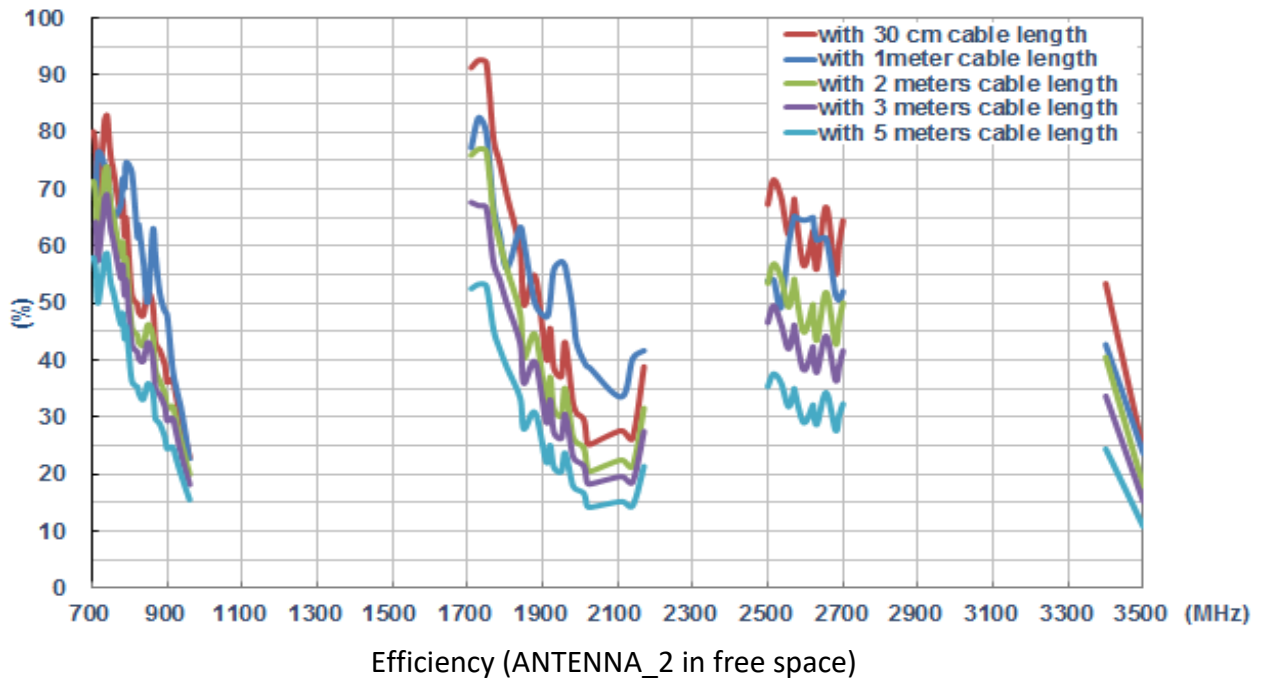


Efficiency (ANTENNA_2 in free space)

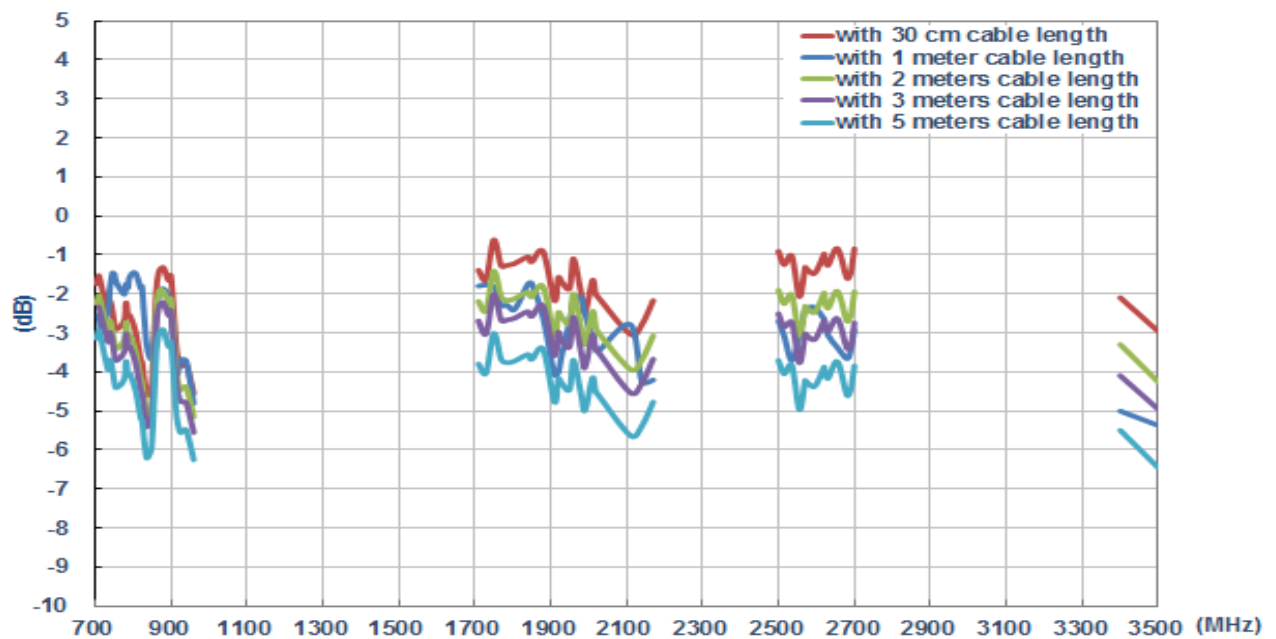


Average Gain (ANTENNA_1 in free space)

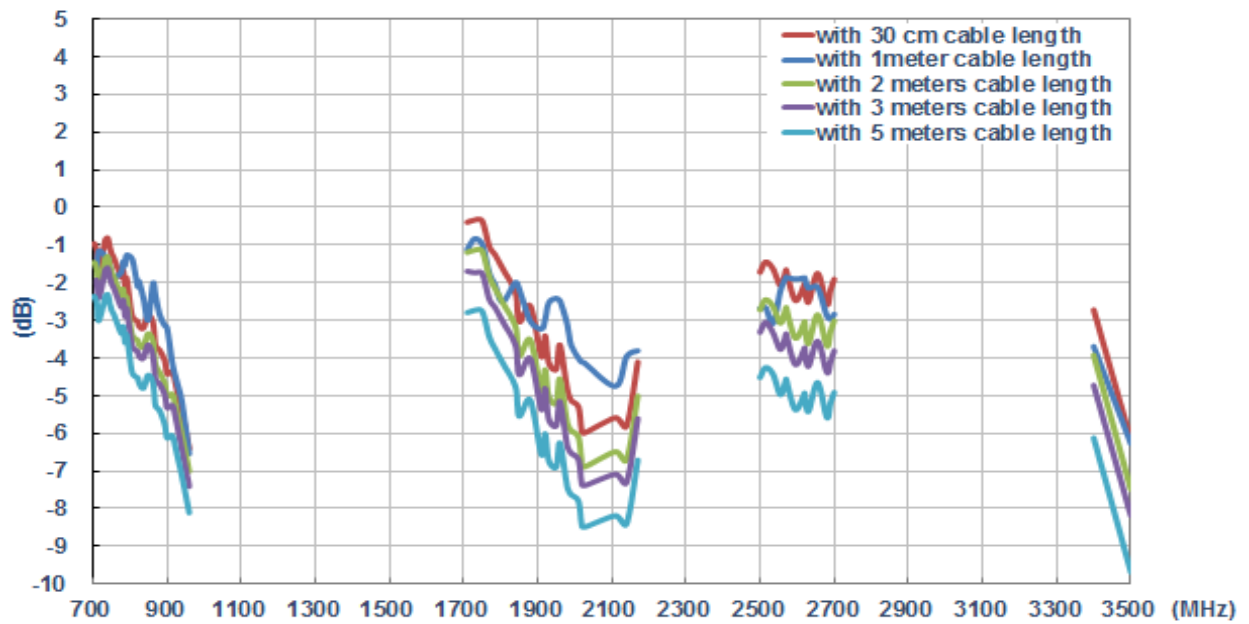


Average Gain (ANTENNA_2 in free space)

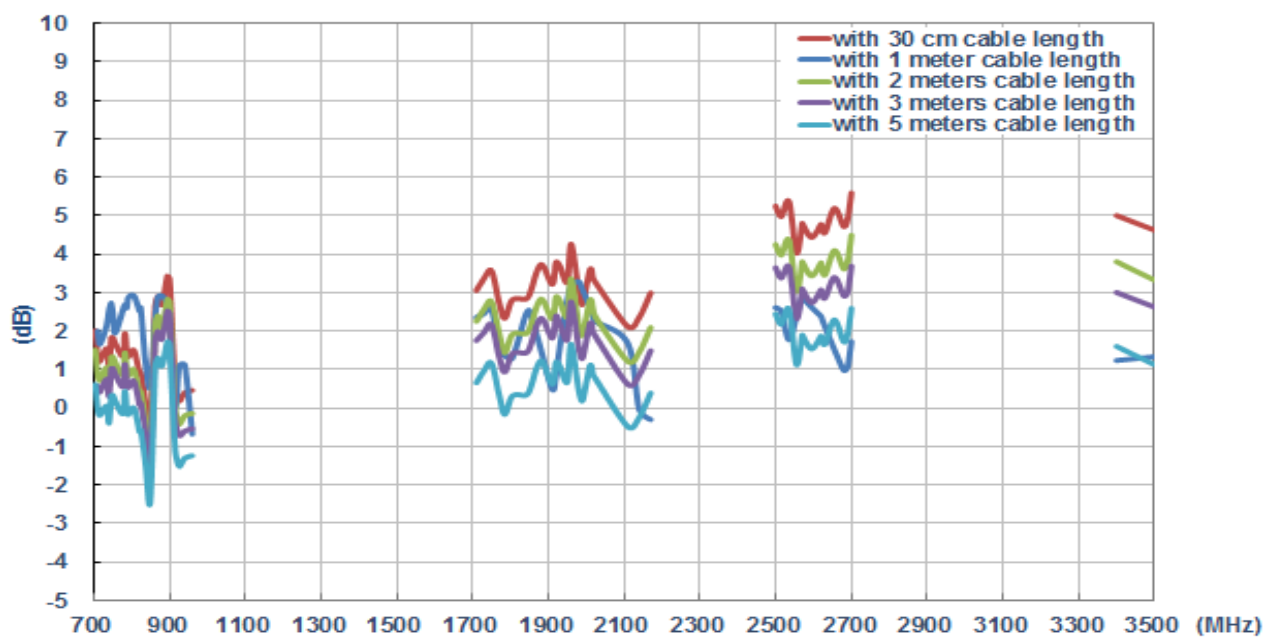


Peak Gain (ANTENNA_1 in free space)

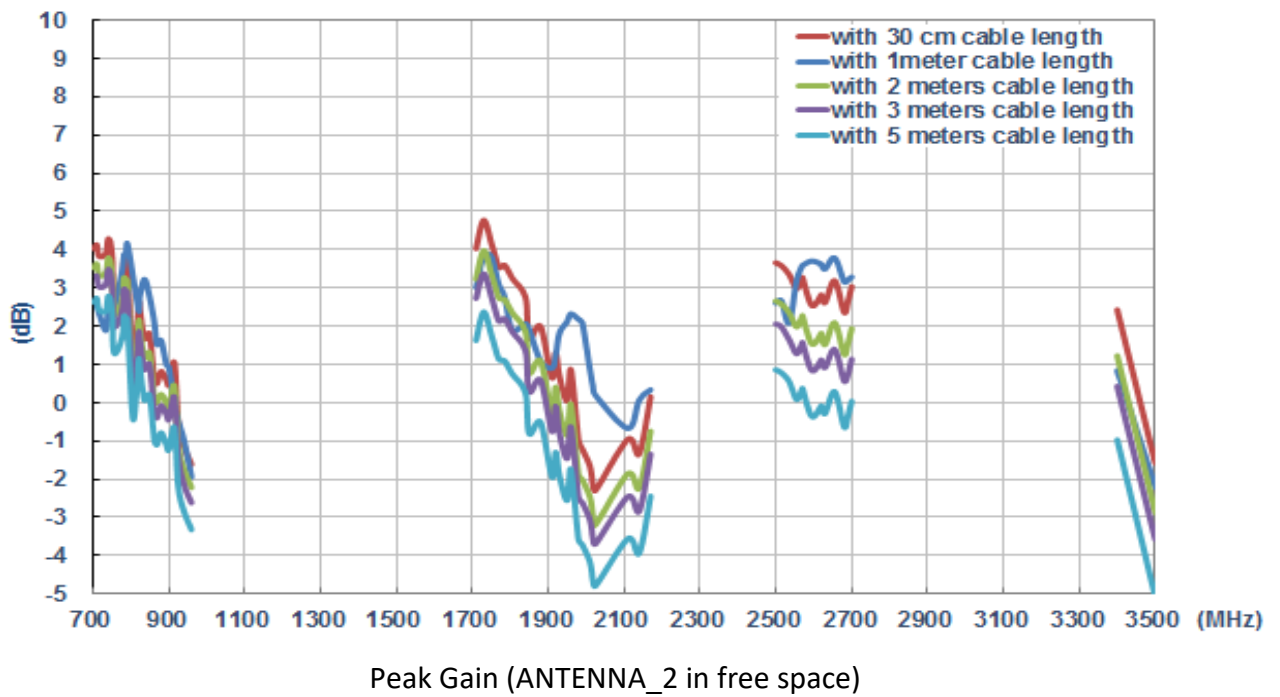


7.2 On a 2mm ABS Groundplane

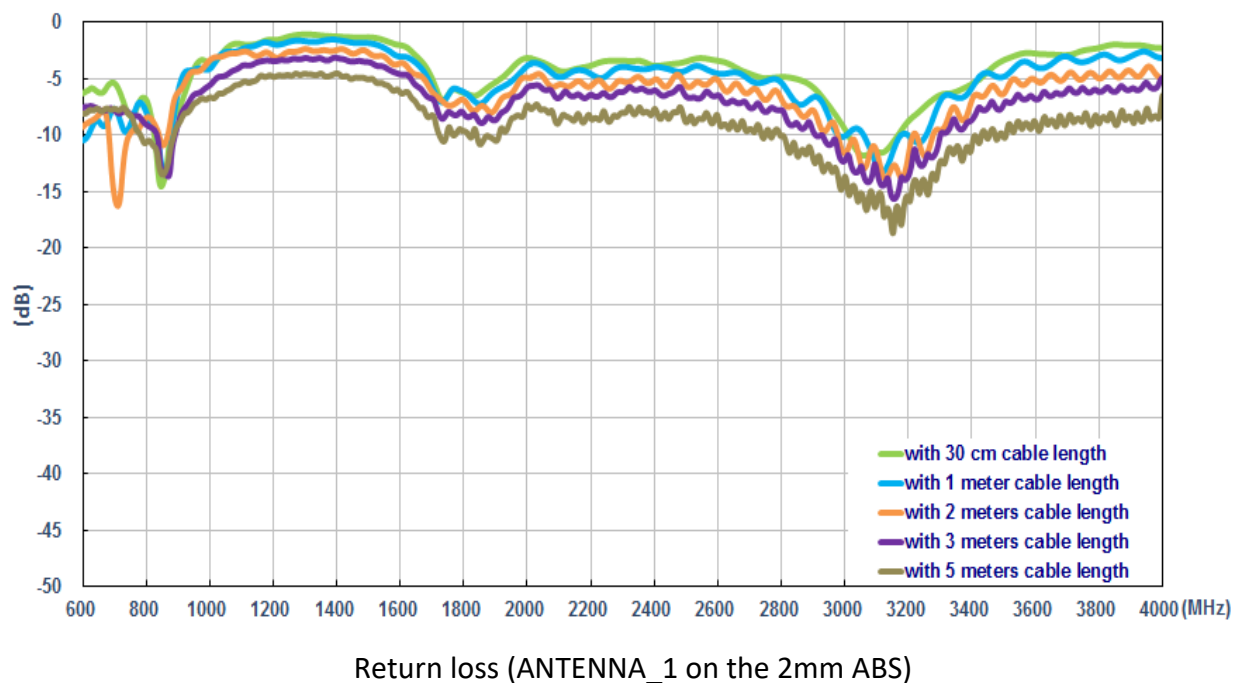


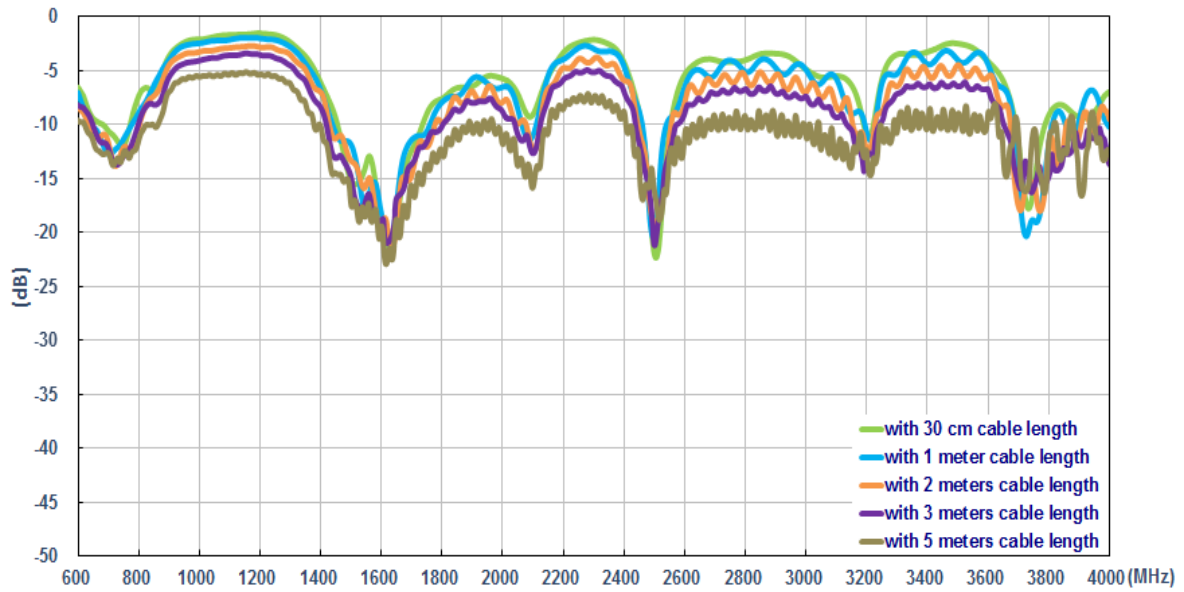


Return loss (ANTENNA_2 on the 2mm ABS)

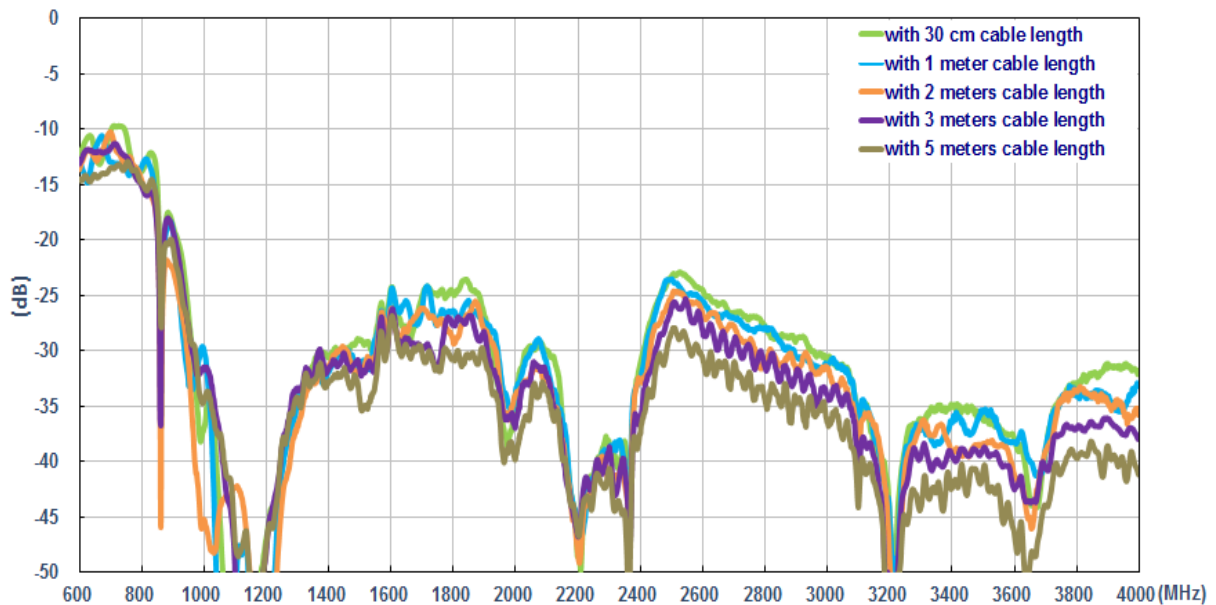


Insertion (on the 2mm ABS)

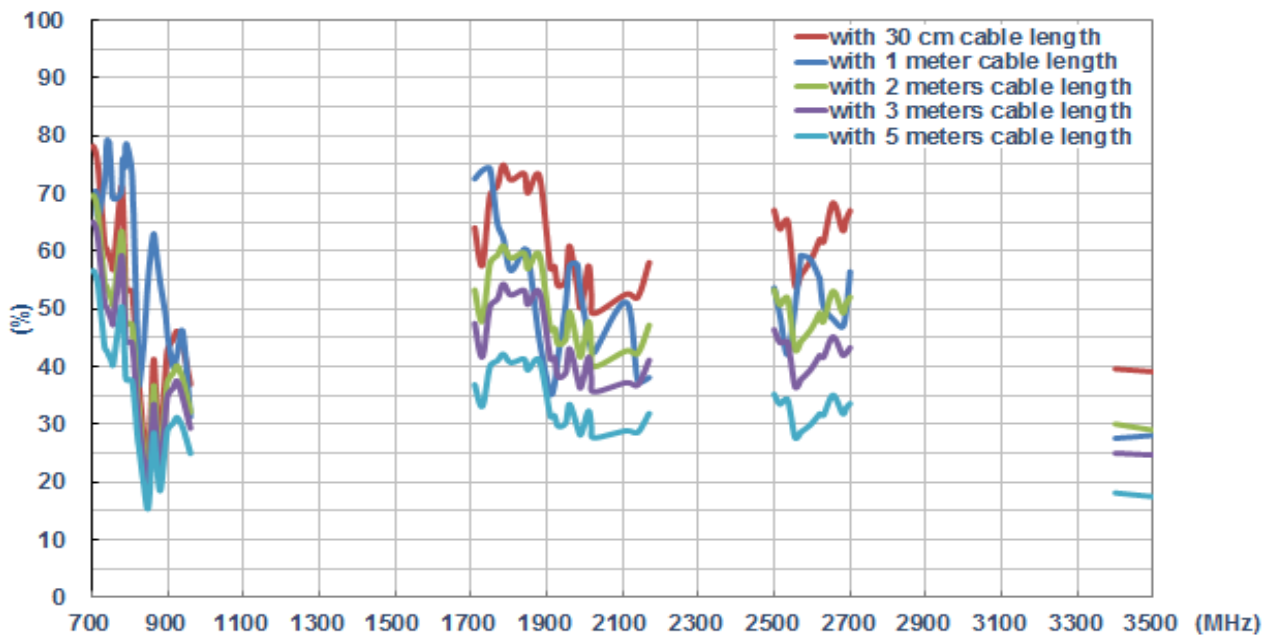


Efficiency (ANTENNA_1 on the 2mm ABS)

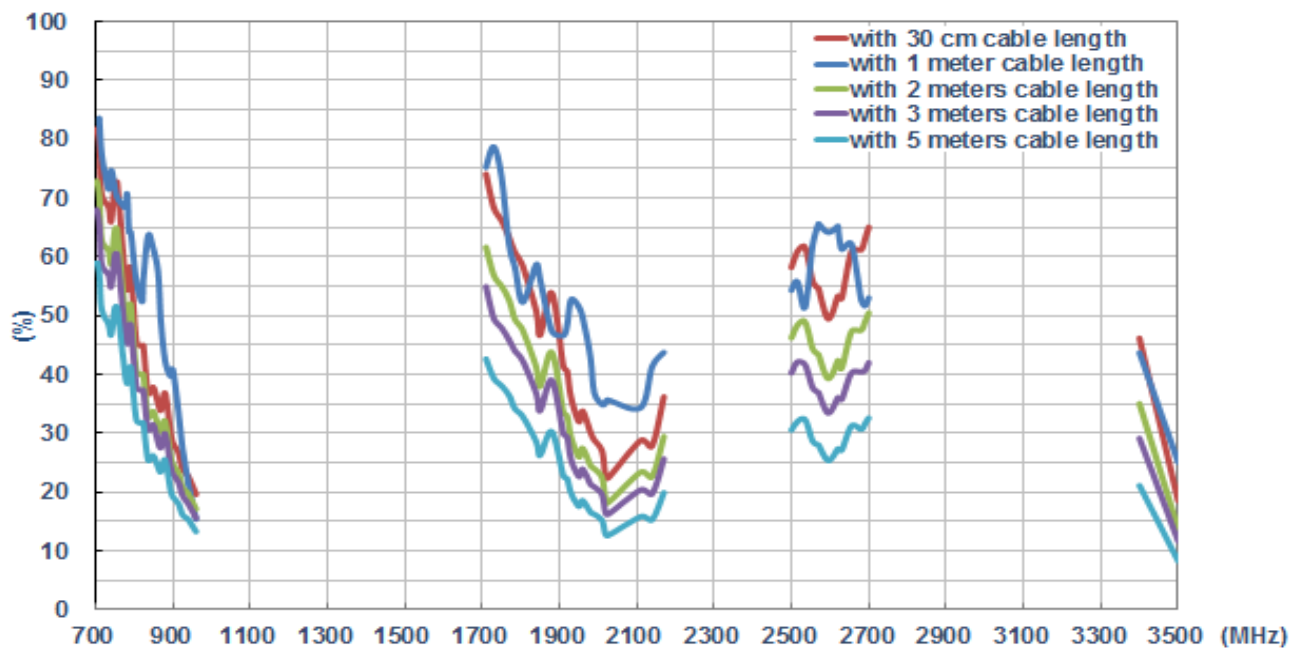


Efficiency (ANTENNA_2 on the 2mm ABS)

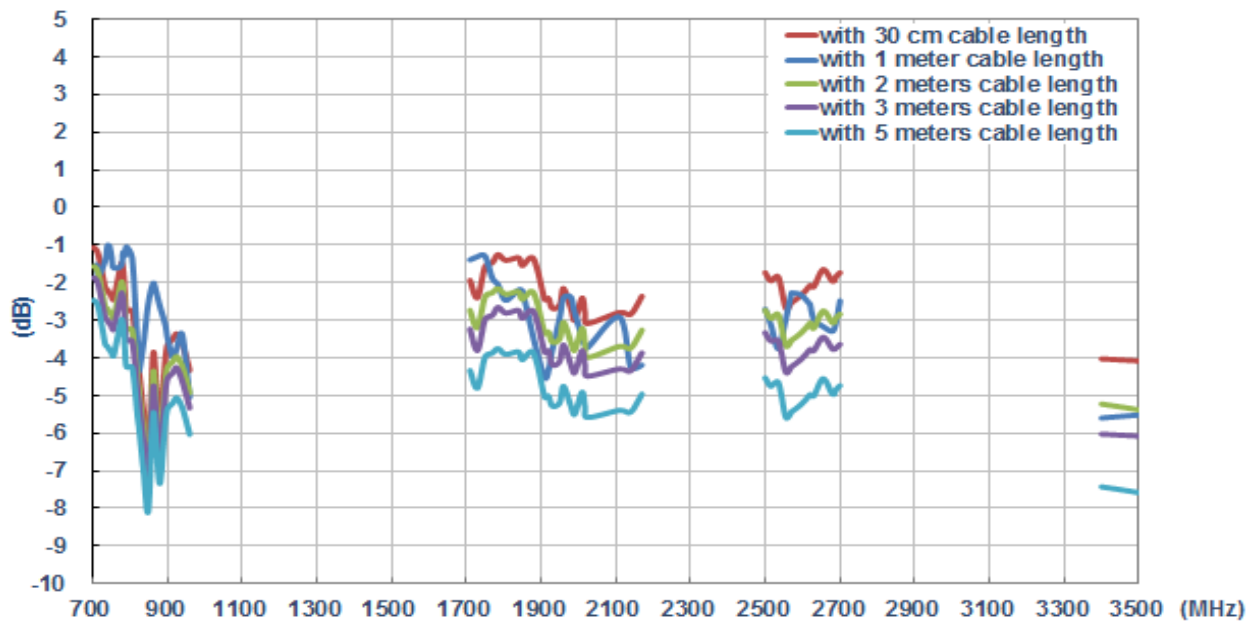


Average Gain (ANTENNA_1 on the 2mm ABS)

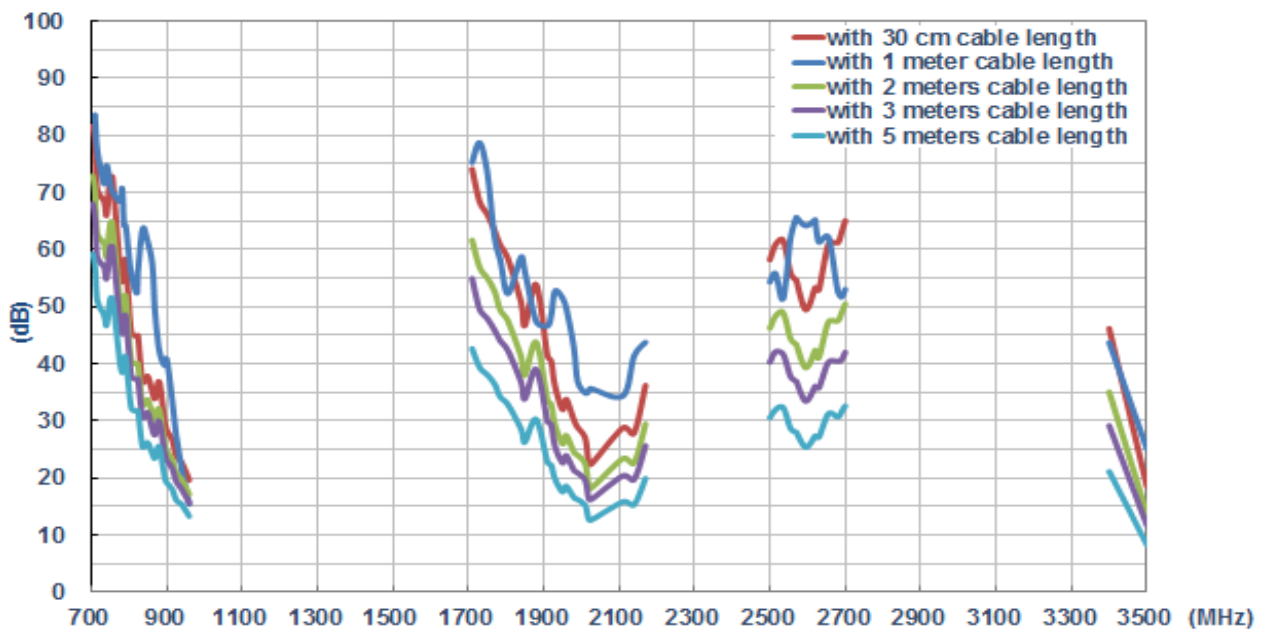

Average Gain (ANTENNA_2 on the 2mm ABS)


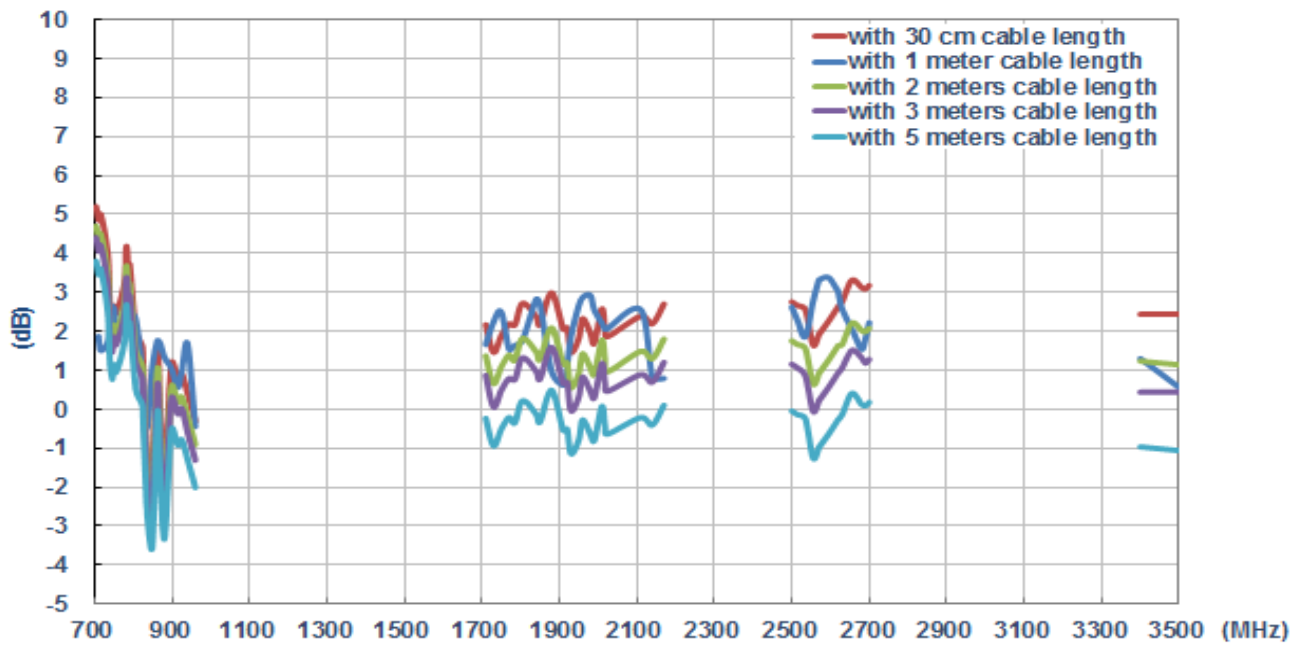



Peak Gain (ANTENNA_1 on the 2mm ABS)

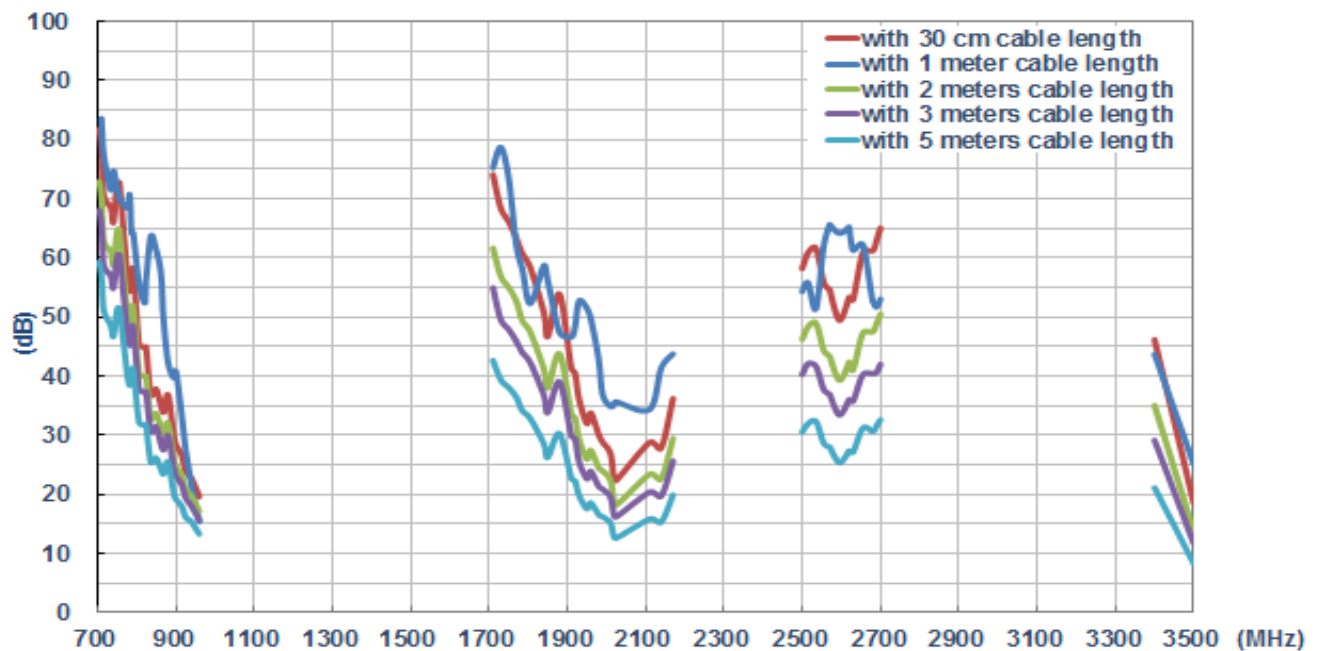


Peak Gain (ANTENNA_2 on the 2mm ABS)

7.3 On a Glass Groundplane

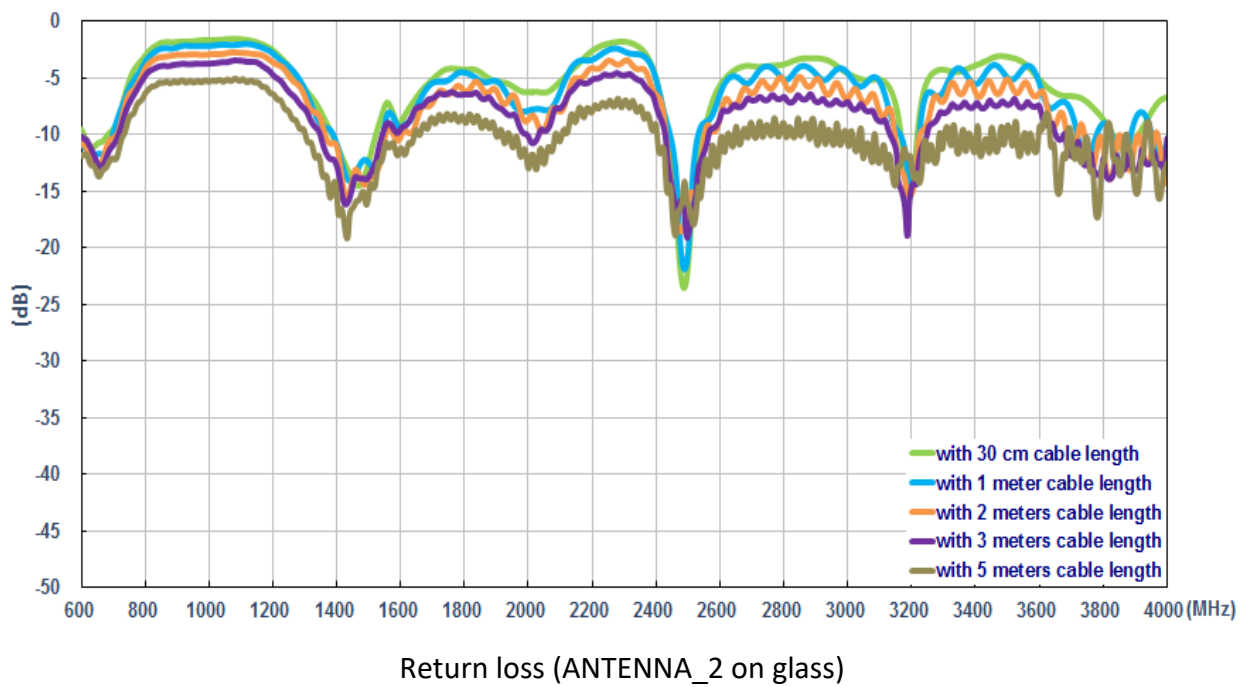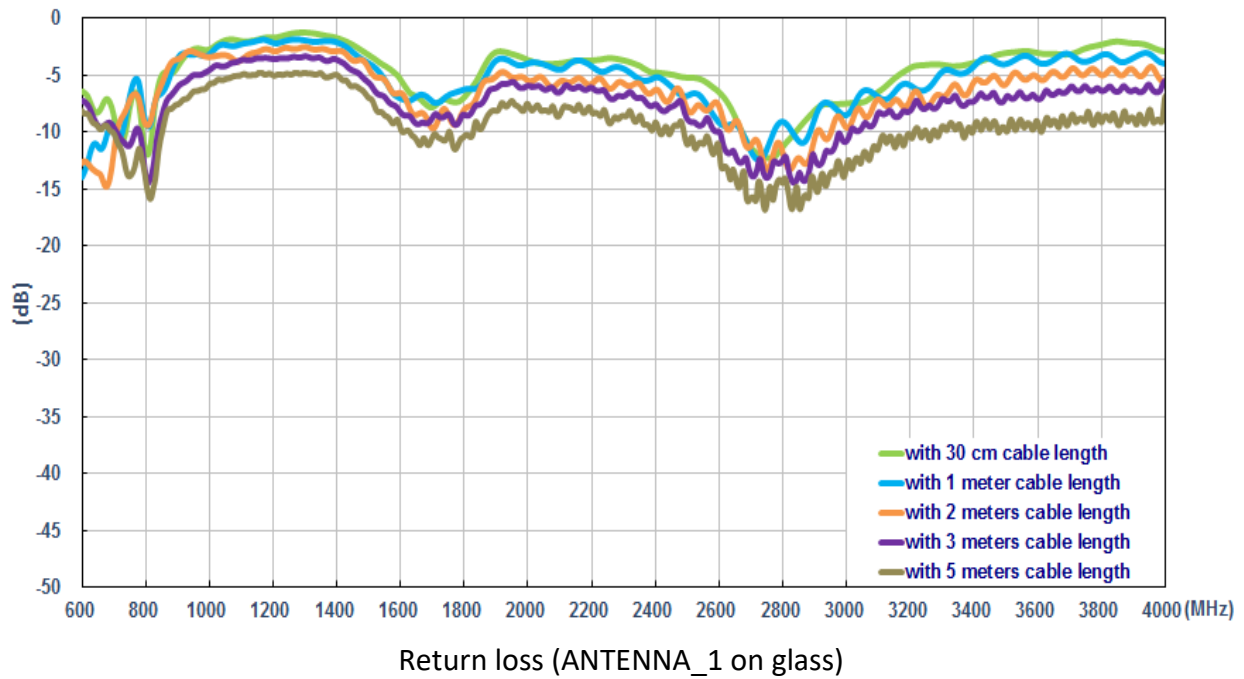


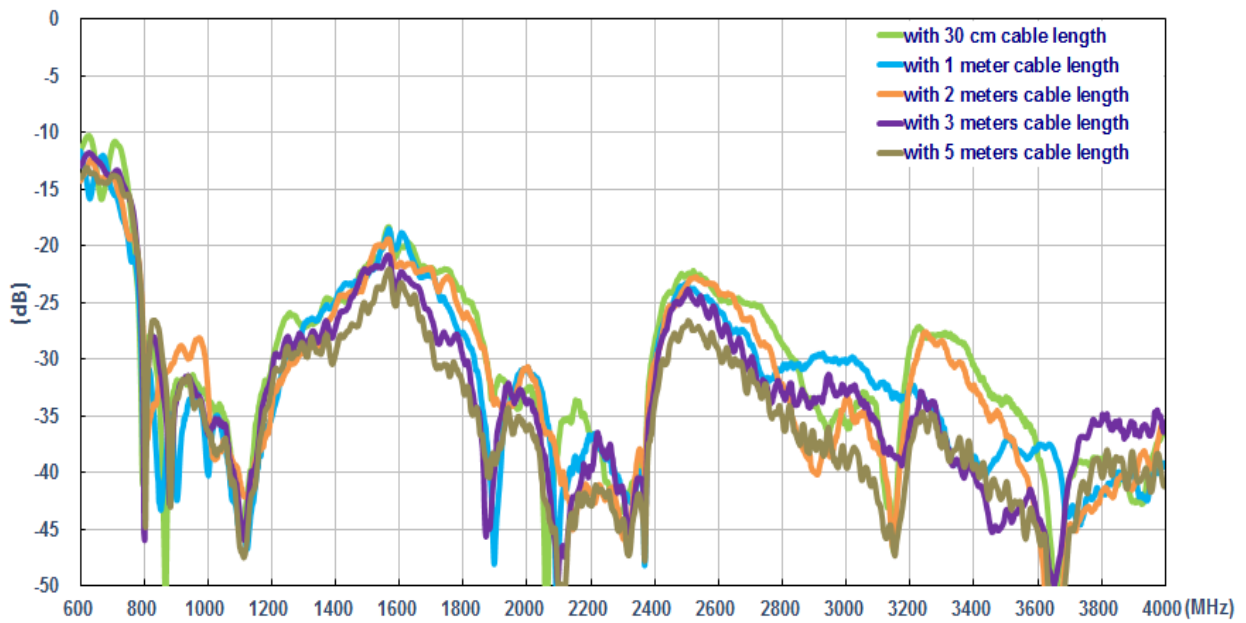


Insertion loss (on glass)

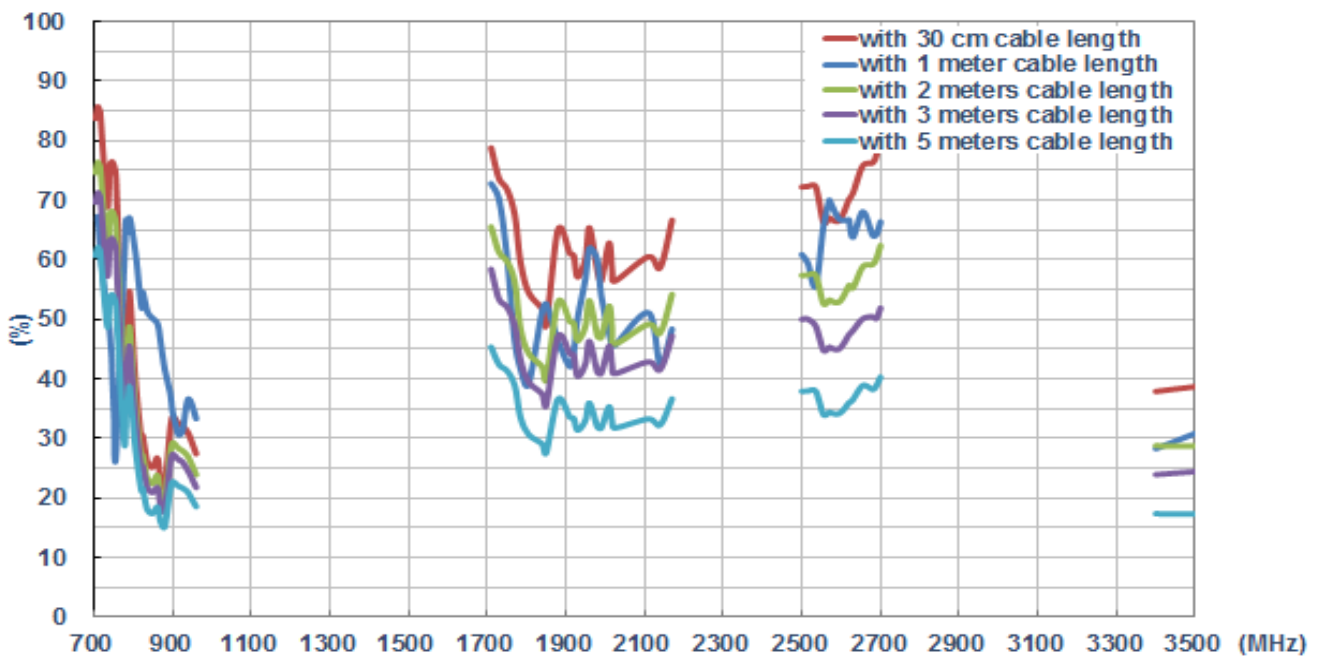


Efficiency (ANTENNA_1 on glass)

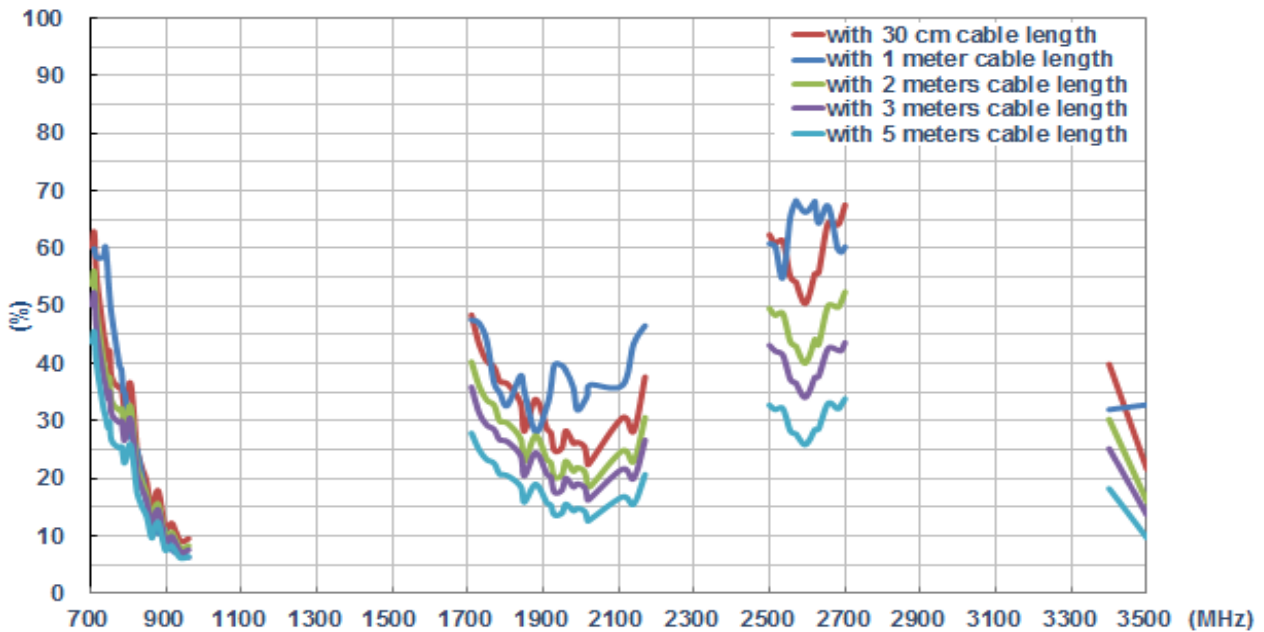


Efficiency (ANTENNA_2 on glass)

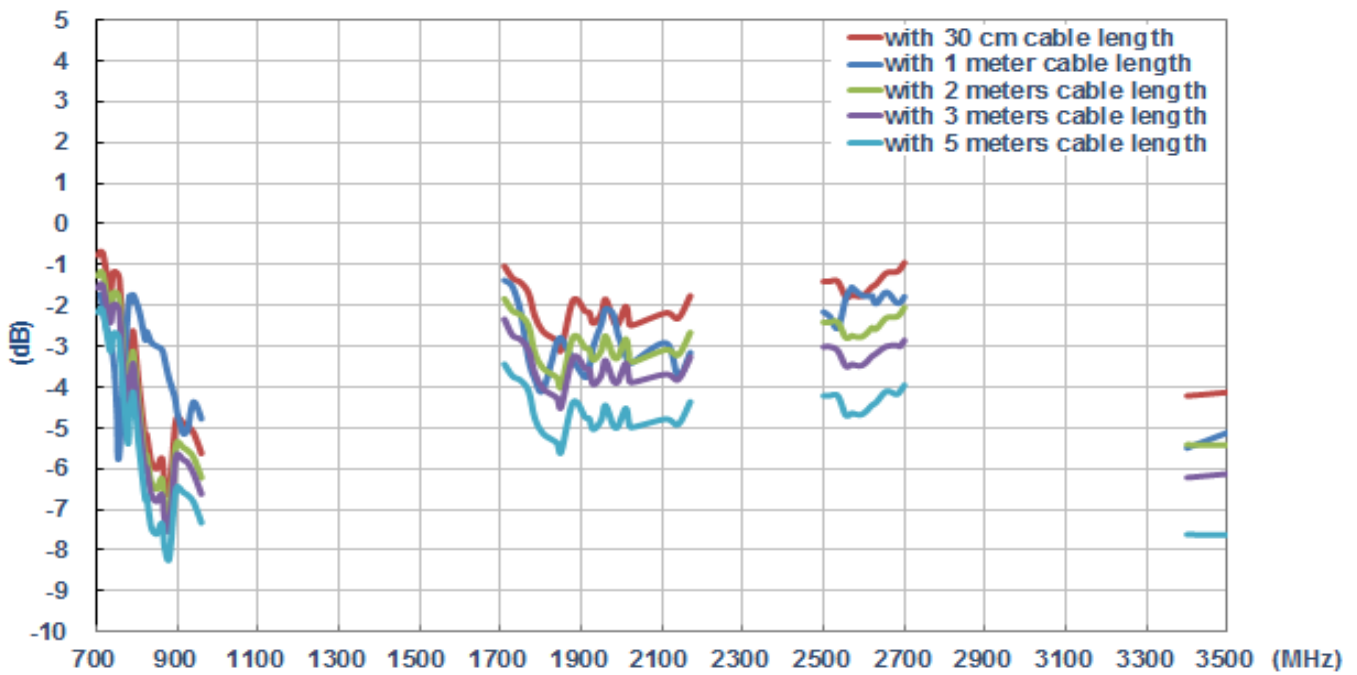


Average Gain (ANTENNA_1 on glass)

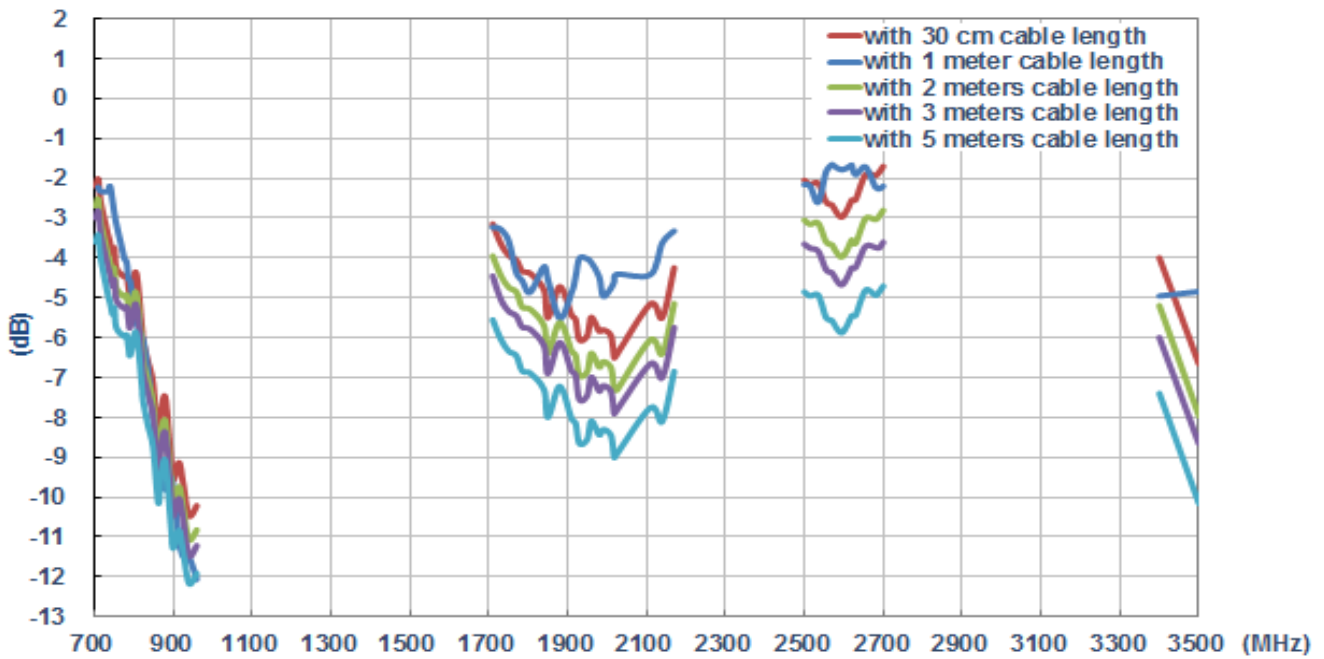

Average Gain (ANTENNA_2 on glass)

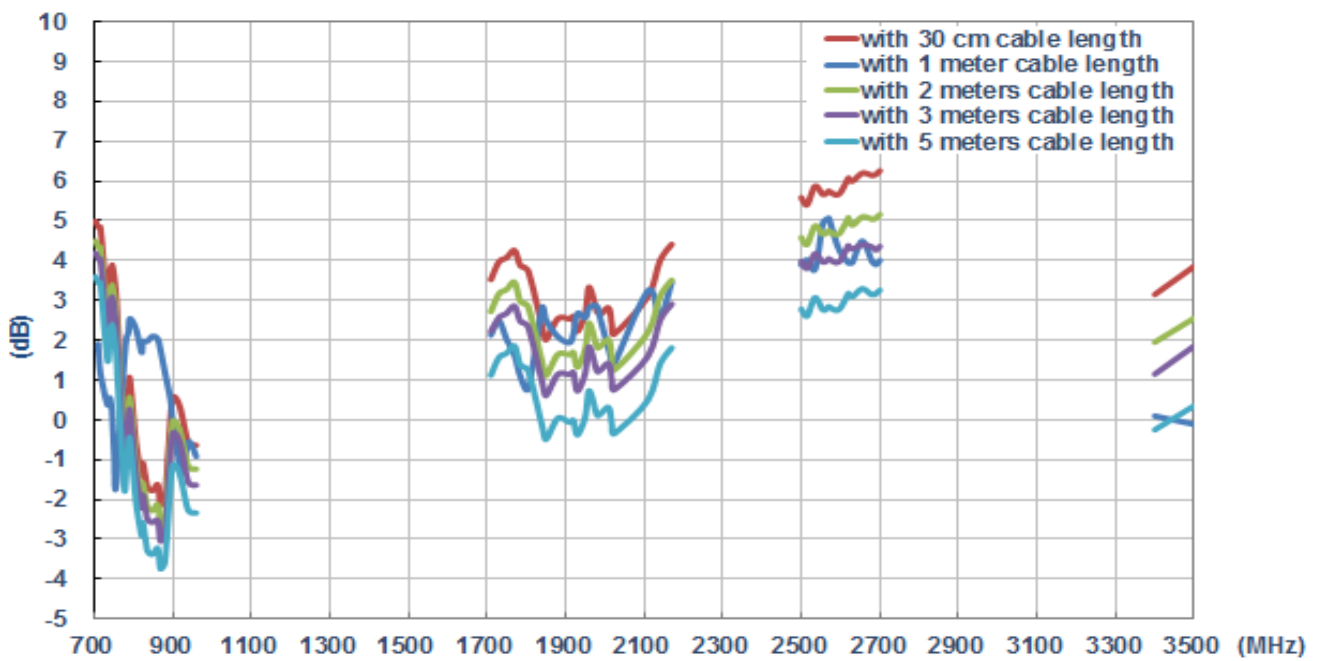

Peak Gain (ANTENNA_1 on glass)

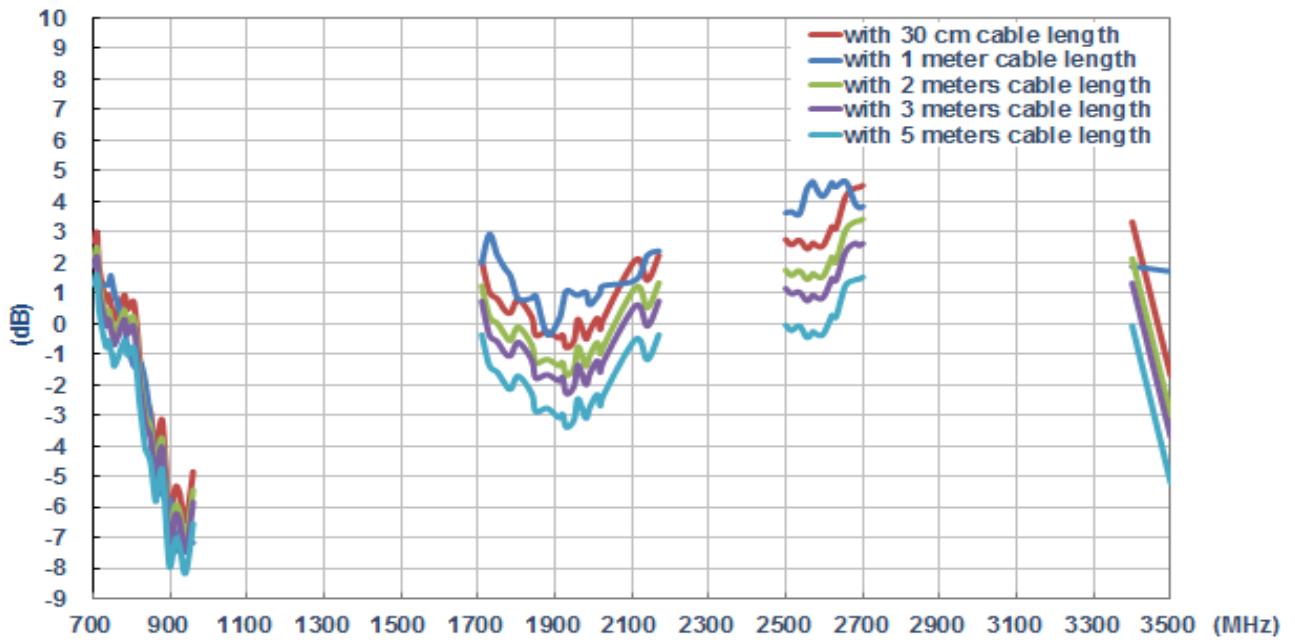

Peak Gain (ANTENNA_2 on glass)

Changelog for the datasheet

SPE-14-8-084- MA240.LBI.001

Revision: F (Current Version)

Date:	2022-06-09
Notes:	Updated cable specifications
Author:	Cesar Sousa

Previous Revisions

Revision: E

Date:	2019-09-04
Changes:	Updated Packaging
Changes Made by:	Gary West

Revision: D

Date:	2018-03-14
Changes:	Updated drawing
Changes Made by:	Jack Conroy

Revision: C

Date:	2018-03-14
Changes:	Updated drawing
Changes Made by:	Jack Conroy

Revision: B

Date:	2018-03-14
Changes:	Updated drawing
Changes Made by:	Jack Conroy

Revision: A (First Release)

Date:	2014-08-28
Notes:	First Release
Author:	David Conolly



TAOGLAS®

www.taoglas.com

