



TAOGLAS®



Datasheet

Pantheon MA761 4-in-1 Permanent Mount Antenna

Part No:
MA761.B.BICG.003

Description:

Pantheon Antenna 4-in-1 MA761 Permanent Mount
5G/4G MIMO and 2.4/5GHz MIMO

Features:

- 2 x 5G/4G 600-6000MHz Antennas (MIMO)
- 2 x Wi-Fi 2.4GHz/5.8GHz Antennas (MIMO)
- IP67 Waterproof
- Front End SAW Filter
- High Efficiency / Peak Gain Outdoor Antenna
- Dimensions: Ø143.2 x 82.4mm
- Fully Customizable Cable and Connectors
- RoHs & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	8
4. Radiation Patterns	13
5. Mechanical Drawing	34
6. Installation	35
7. Packaging	36
<hr/>	
Changelog	37

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

1. Introduction

Certified

CERTIFICATION
EUROPE™

Certified

INTERNATIONAL
046

IATF16949



The Taoglas MA761 Pantheon 4-in-1 antenna is an omnidirectional heavy-duty, fully IP67 waterproof external M2M antenna for use in telematics, transportation, and remote monitoring applications. This unique antenna delivers powerful MIMO antenna technology for 5G/4G Cellular and Wi-Fi for next-generation multiple wireless technology systems.

The Pantheon MA750 covers all 5G bands from 600-6000MHz, exhibiting excellent performance at key 5G bands such as band 71(617MHz) and the repurposed CBRS and C-band frequencies from 3400-4200MHz. This ensures the Pantheon is prepared for mission critical applications.

Typical Applications Include:

- Public Safety
- Passenger Bus and Rail Services
- Digital Signage
- Commercial Transportation and Fleet Management

All five high-performance antennas are integrated into an extremely robust IP67 permanent mount compact antenna package measuring just 82.4mm in height and 143.2mm in diameter.

The antenna has its own ground-plane and can radiate on any mounting environment like metal or plastic without affecting performance. The cables are low loss allowing for lengths of up to 10 meters (32' and 9.70"), critical for buses, trains, and other commercial transport applications.

Customized cables and connector version available, contact your regional Taoglas customer support team for further information.

2. Specifications

5G/4G MIMO

Band	Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	VSWR	Impedance	Polarization	
5G NR/4G Band 5,8,12,13,14,17,18,20,26,27,28, 29,71	617~960	MIMO 1	Free Space	61	-2.2	3.3	3 Max	50Ω	Linear
			30X30cm GroundPlane	35	-1.7	3.5			
		MIMO 2	Free Space	69	-4.7	2.5			
			30X30cm GroundPlane	26	-6.1	1.4			
5G NR/4G Band 21,32,74,75,76	1427~1518	MIMO 1	Free Space	36	-4.4	2.8			
			30X30cm GroundPlane	21	-4.8	2.8			
		MIMO 2	Free Space	34	-7.0	-0.5			
			30X30cm GroundPlane	18	-7.8	0.5			
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710~2200	MIMO 1	Free Space	58	-2.4	3.1			
			30X30cm GroundPlane	48	-2.4	5.4			
		MIMO 2	Free Space	57	-3.2	3.2			
			30X30cm GroundPlane	47	-3.3	4.4			
Wi-Fi 2400	2400~2500	MIMO 1	Free Space	44	-3.6	2.1			
			30X30cm GroundPlane	64	-3.2	4.0			
		MIMO 2	Free Space	47	-1.9	5.2			
			30X30cm GroundPlane	67	-1.8	5.8			
4G/3G Band 7,38,41	2490~2690	MIMO 1	Free Space	51	-3.0	4.6			
			30X30cm GroundPlane	65	-2.6	4.7			
		MIMO 2	Free Space	55	-1.9	5.4			
			30X30cm GroundPlane	68	-1.7	6.2			
5G NR/4G Band 22,42,43,48,77,78,79	3300~5000	MIMO 1	Free Space	34	-5.2	5.8			
			30X30cm GroundPlane	41	-5.1	8.1			
		MIMO 2	Free Space	35	-4.0	4.7			
			30X30cm GroundPlane	42	-3.9	6.8			
LTE5200/ Wi-Fi 5800	5150~5925	MIMO 1	Free Space	16	-8.1	1.2			
			30X30cm GroundPlane	23	-8.2	2.4			
		MIMO 2	Free Space	16	-6.5	3.0			
			30X30cm GroundPlane	22	-6.7	3.3			

Wi-Fi MIMO 2.4GHz / 5GHz

Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	VSWR	Polarization	Impedance
-----------------	--	----------------	-------------------	-----------------	------	--------------	-----------

2400~2500	MIMO1	36	-4.5	3.7	2 Max	Linear	50 Ω
	MIMO2	57	-2.4	2.2			
5150~5850	MIMO1	51	-2.9	5.4			
	MIMO2	50	-3.1	4.8			


All measurements were conducted with 0.5m low loss CFD200 cable.

Mechanical	
Antenna Dimensions	Height 82.4mm x Diameter 143.19mm
Casing	Wonderloy PC-540 PC/ABS Alloy
Waterproof	IP67
Cables	5G/4G & Wi-Fi – 3m CFD-200
Connectors	5G/4G – SMA(M) Wi-Fi – RP-SMA(M)
Base and thread	CAN10 Zinc Alloy
Thread diameter	M30 x 2 (30mm)
Nut	Nickel Plated Steel
Foam	3M 9448HK
Weight	1.16Kg
Recommended Torque for Mounting	5-7Nm
Enviornmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH


5G/4G Bands			
Band Number	5GNR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✓
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: -	DL: 717 to 728	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710-1780	DL: 2110-2200	✓
71		617 to 698	✓
74/75/76		1427 to 1518	✓
78		3300 to 3800	✓
79		4400 to 5000	✓
85	698-716	728-746	✓

3. Antenna Characteristics


3.1 Return Loss

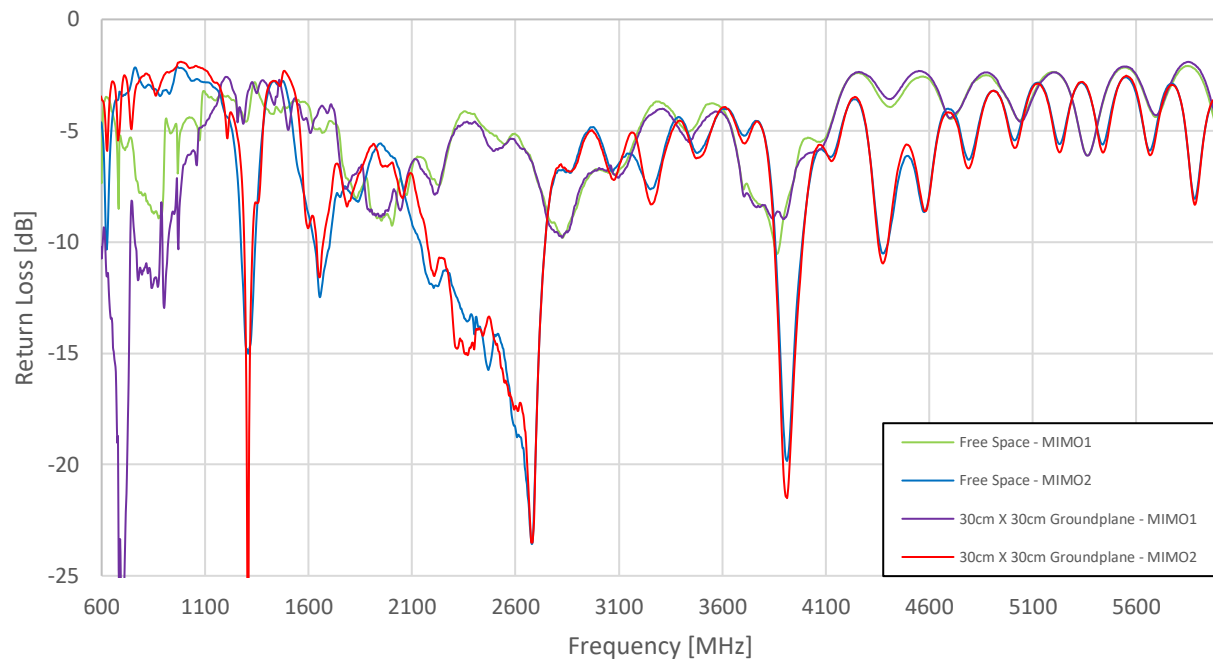


3.2 Efficiency

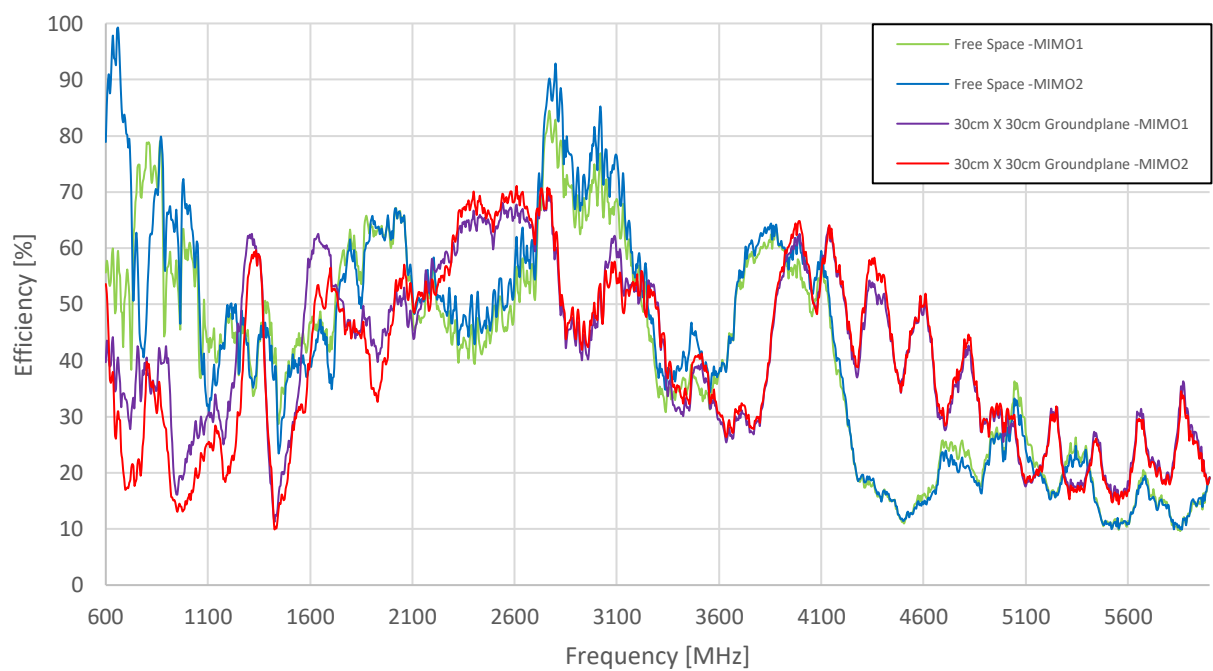


3.3 Peak Gain

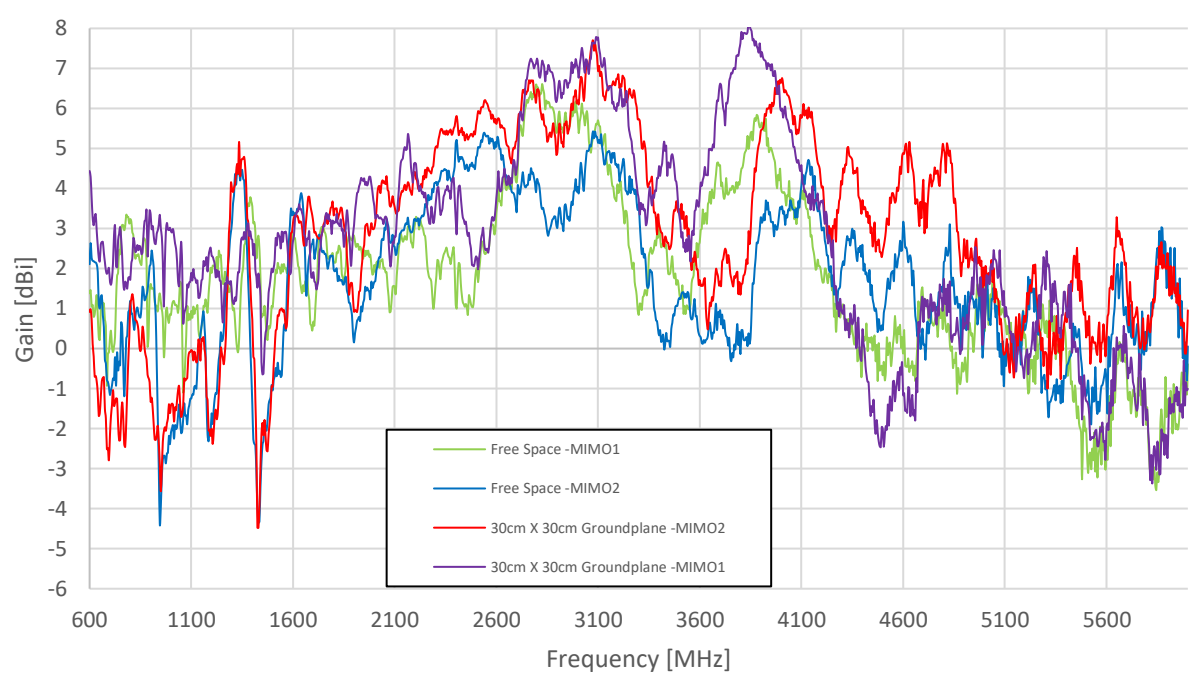


3.4 Average Gain

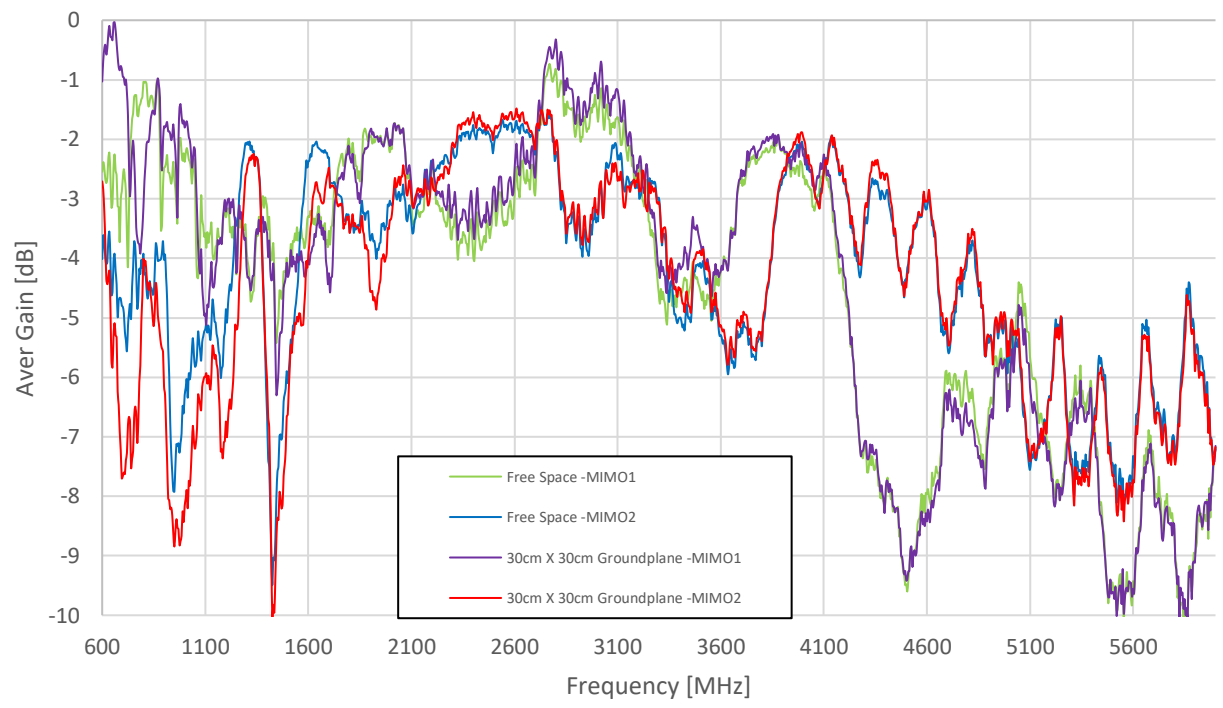


3.5 Return Loss – WiFi MIMO 1 &2 (2.4/5 GHz)

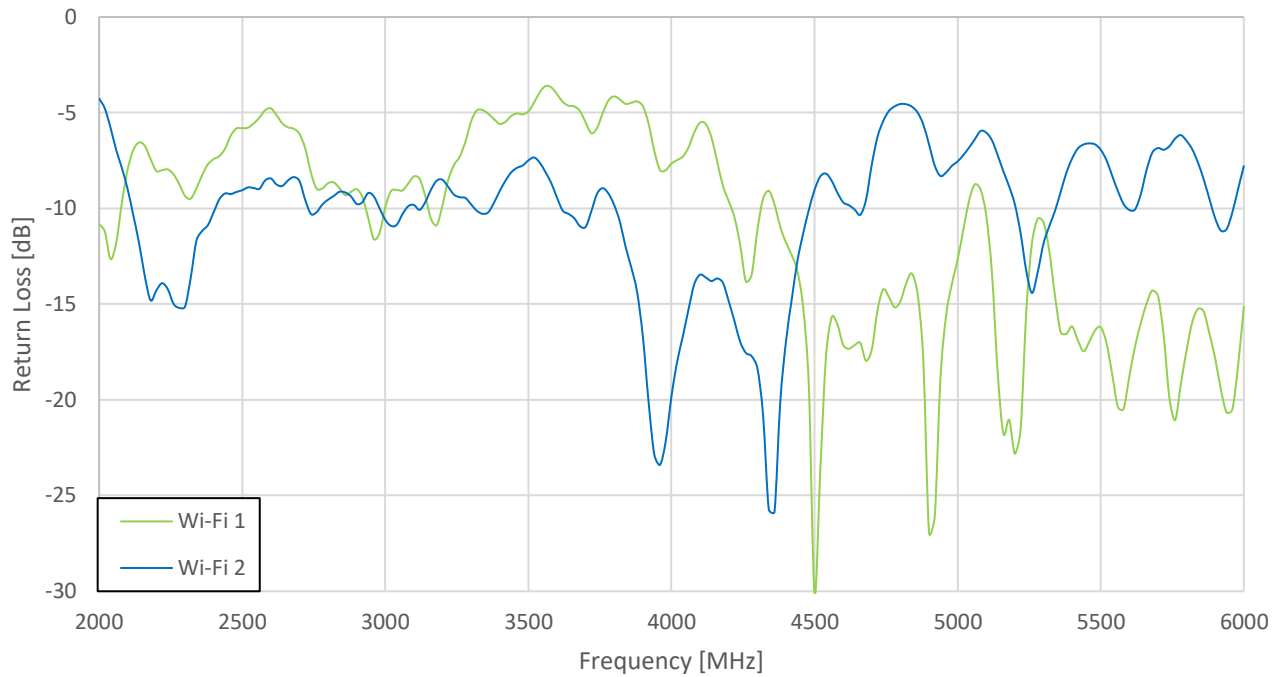


3.6 VSWR - WiFi MIMO 1 &2 (2.4/5 GHz)

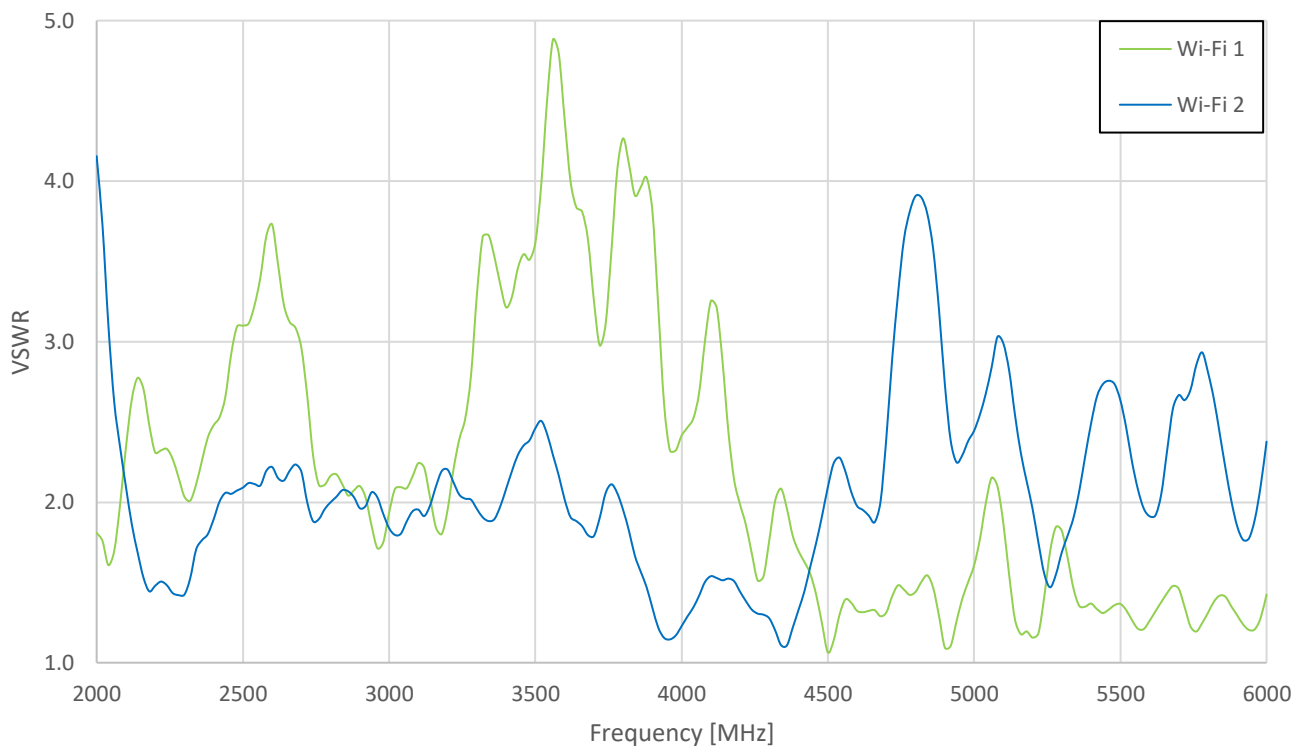


3.7 Isolation – WiFi MIMO 1 & 2 (2.4/5 GHz)

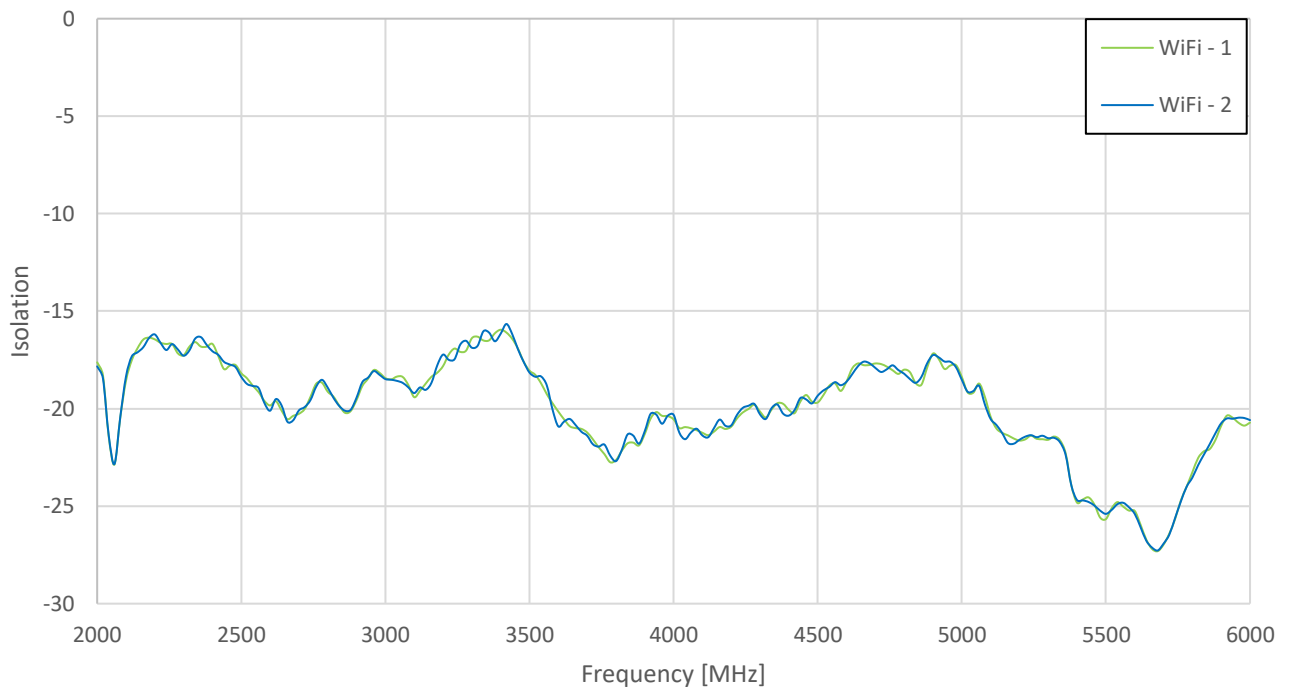


3.8 Efficiency - WiFi MIMO 1 & 2 (2.4/5 GHz)

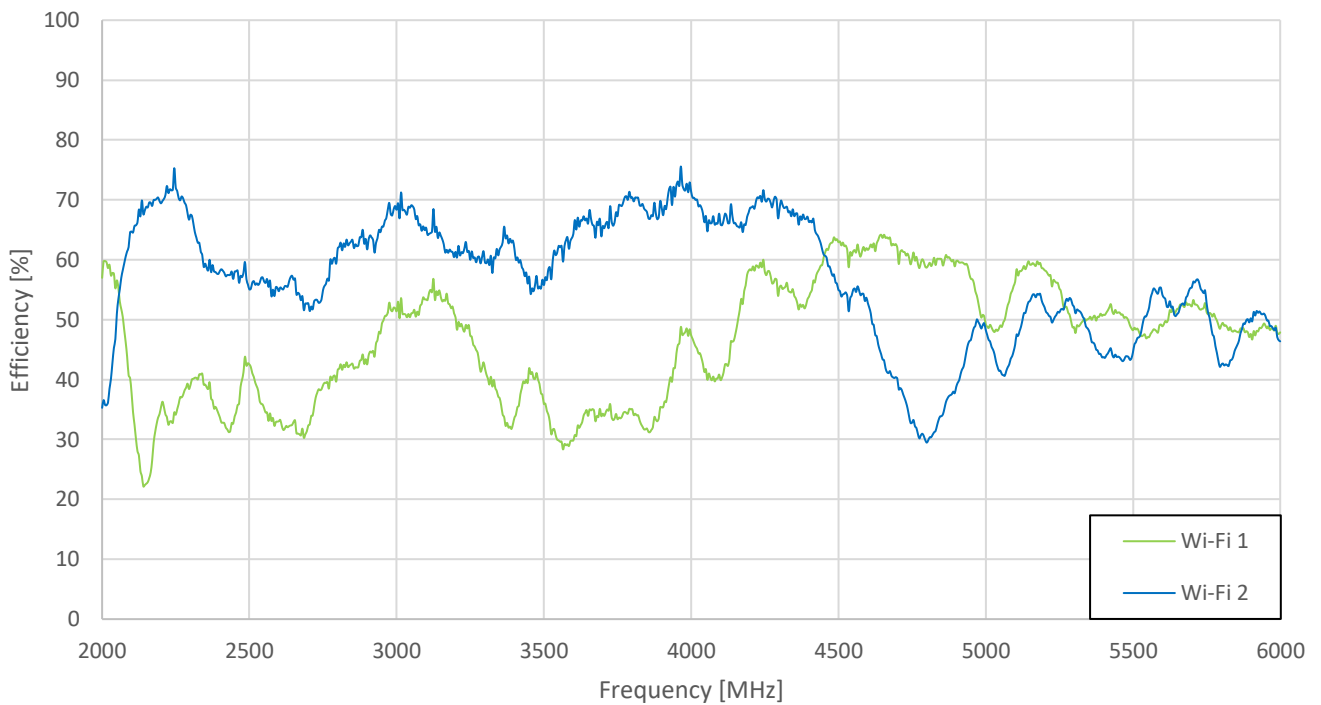

3.9 Peak Gain - WiFi MIMO 1 &2 (2.4/5 GHz)

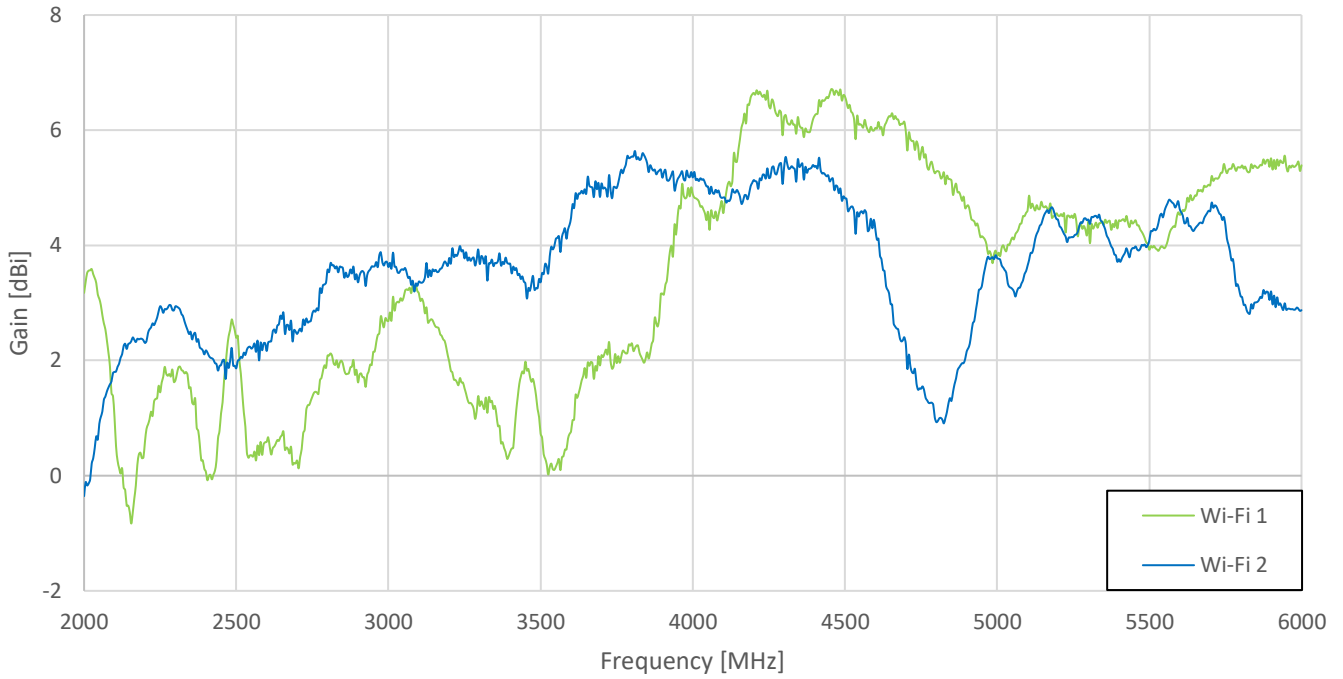


3.10 Average Gain - WiFi MIMO 1 &2 (2.4/5 GHz)

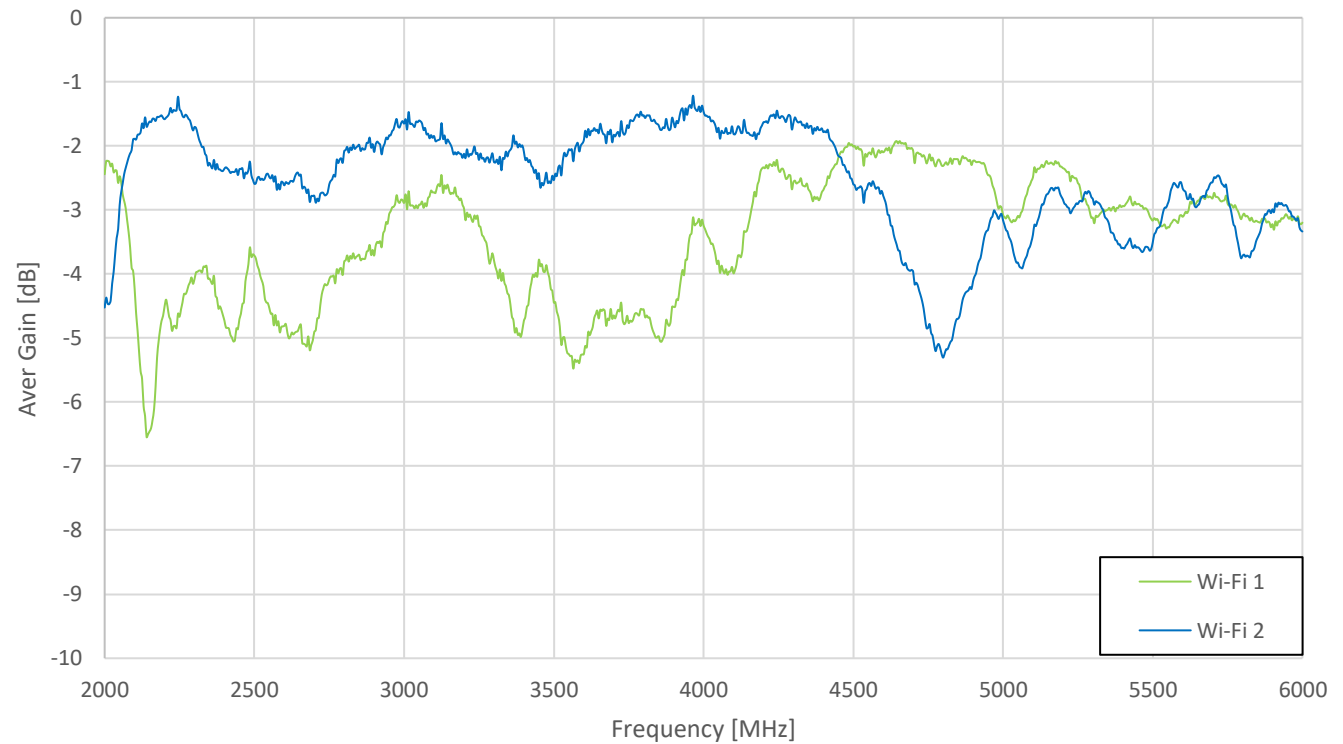


4. Radiation Patterns

4.1 Test Setup


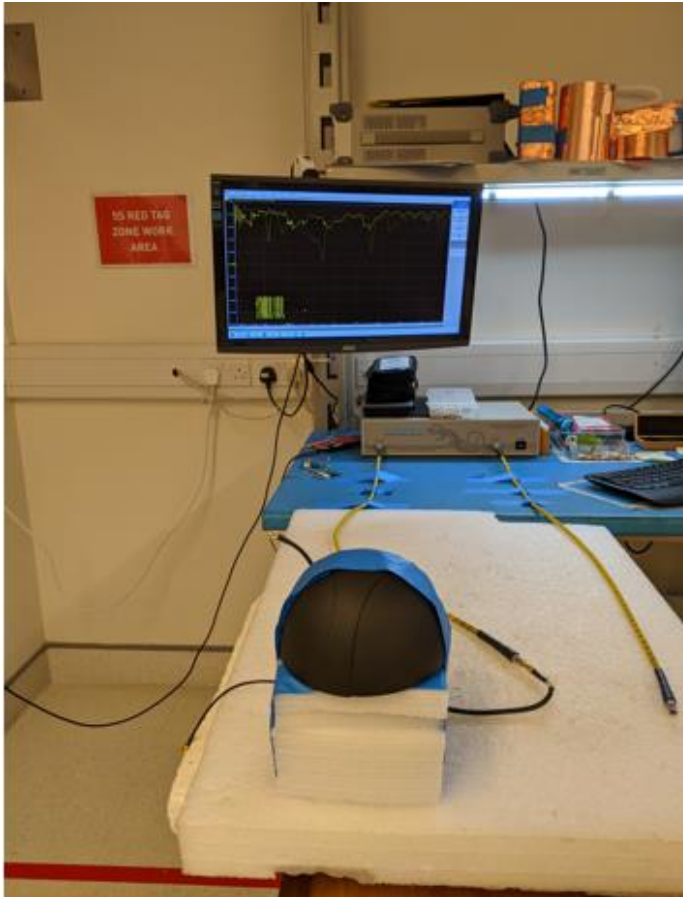


VNA Test Set-up




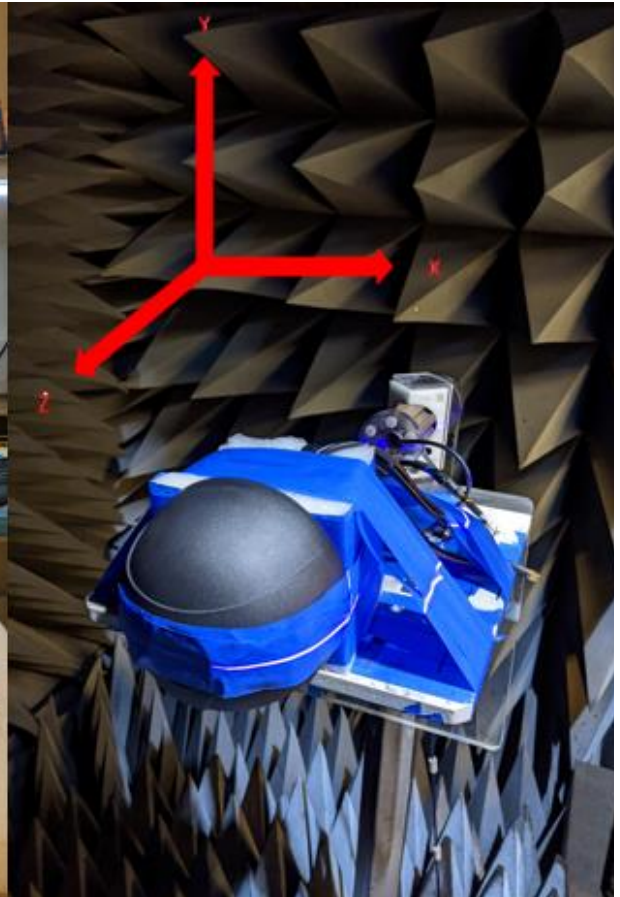


Chamber Test Set-up

4.2 705MHz 3D and 2D Cellular Radiation Patterns

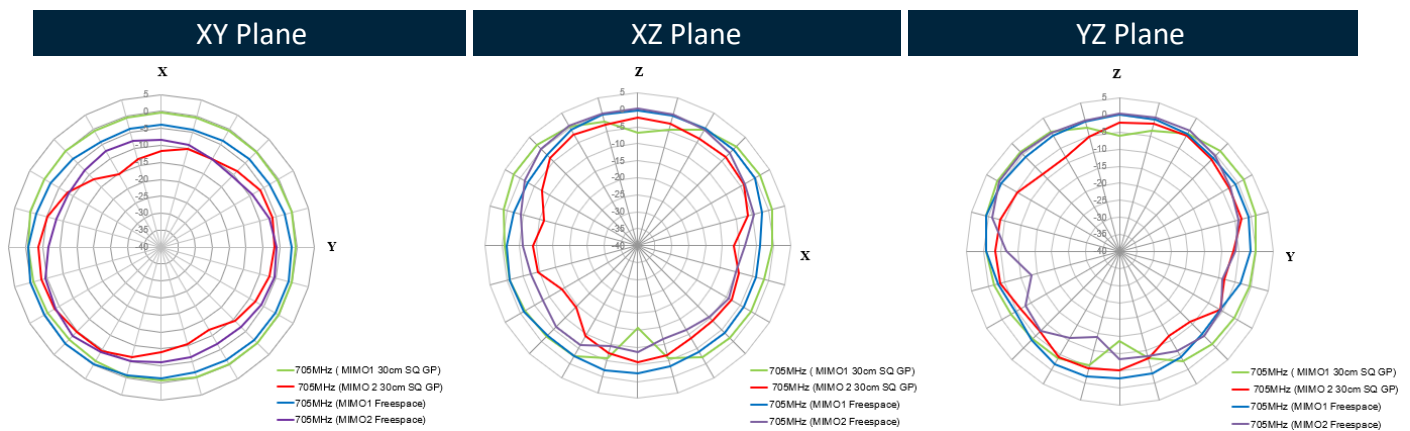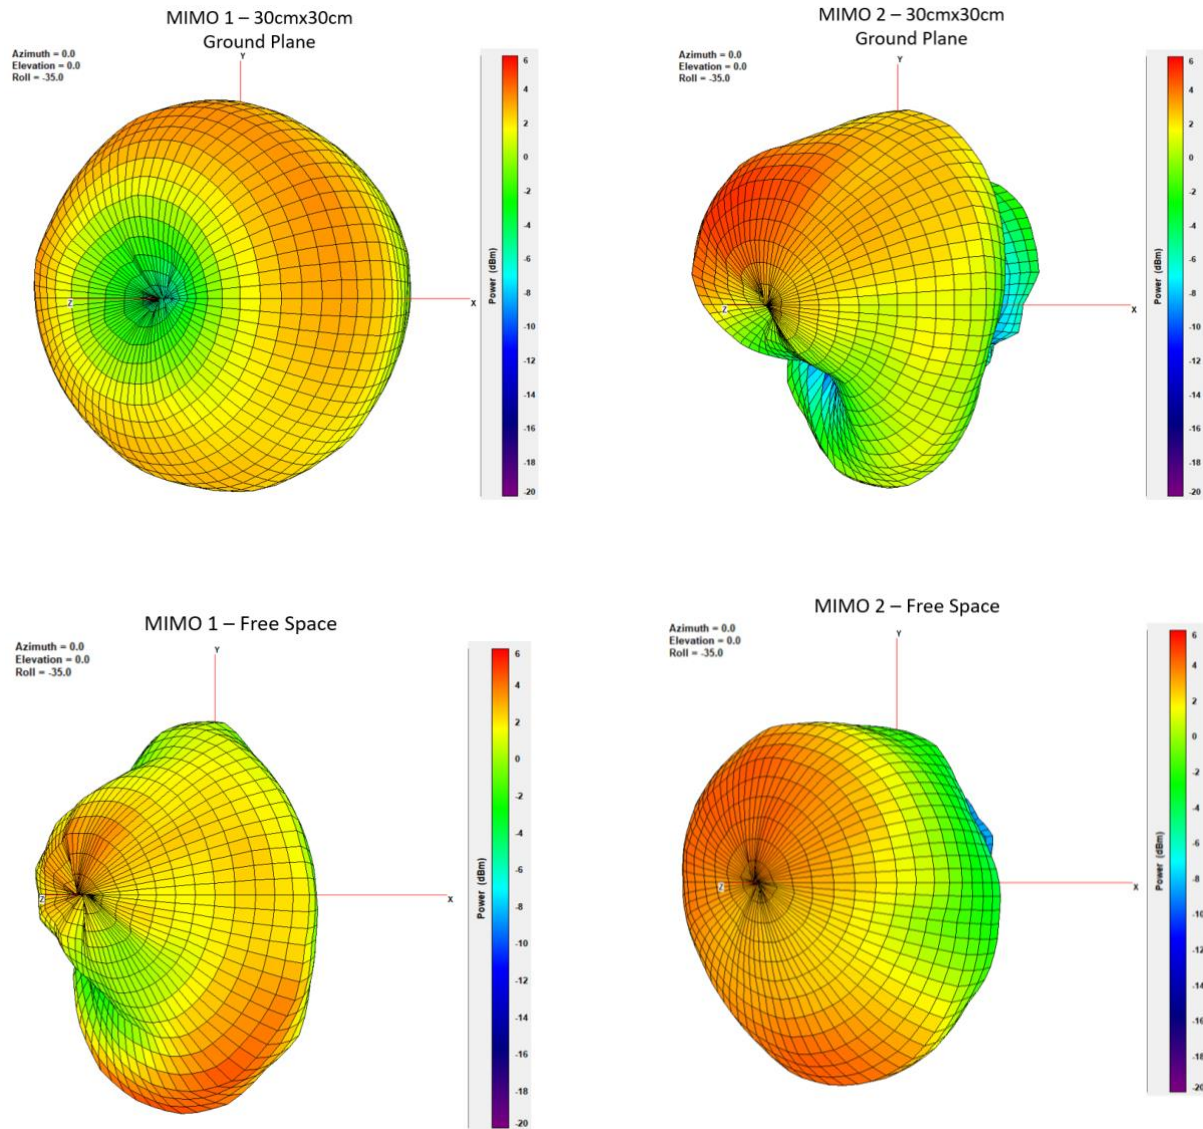




750MHz

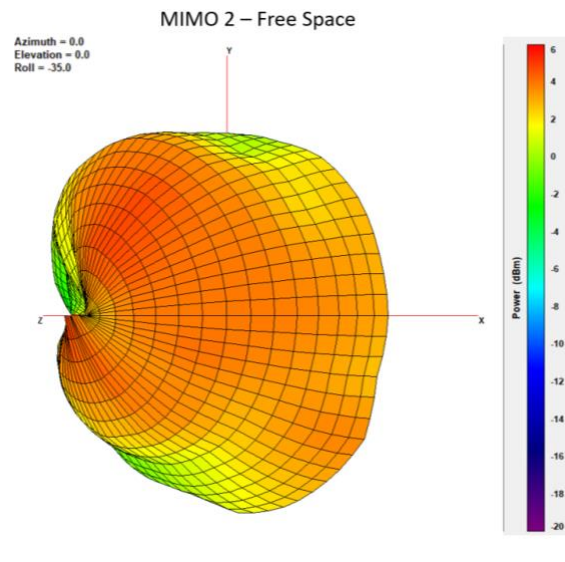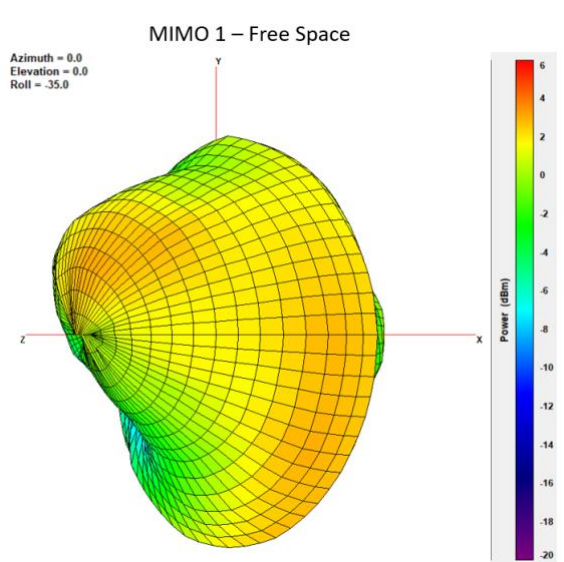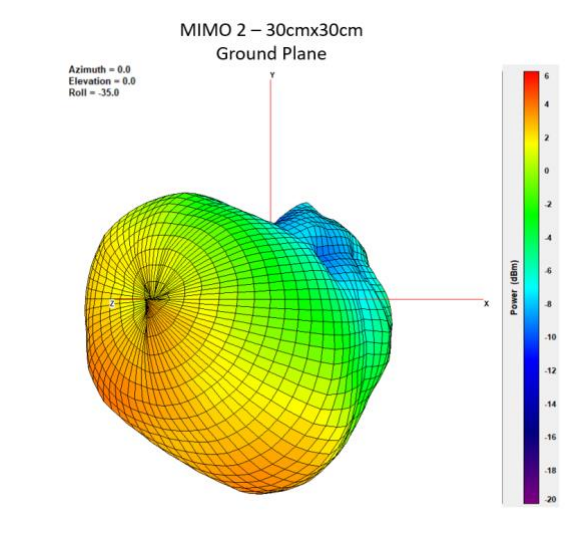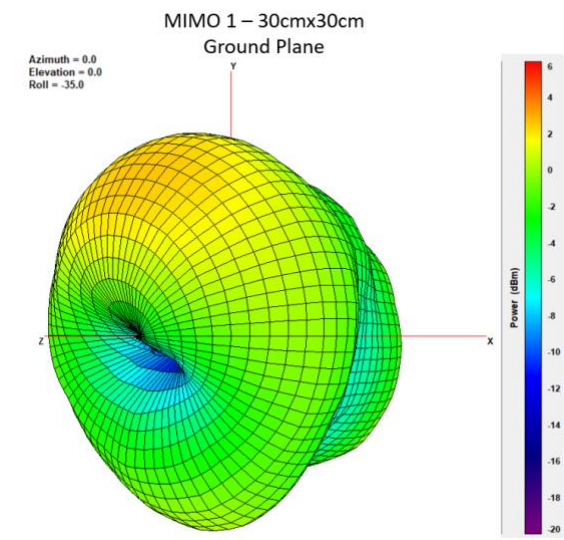





XY Plane

XZ Plane

YZ Plane

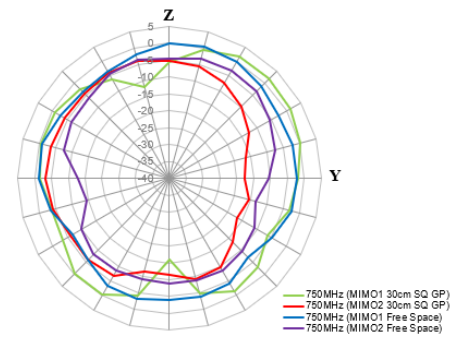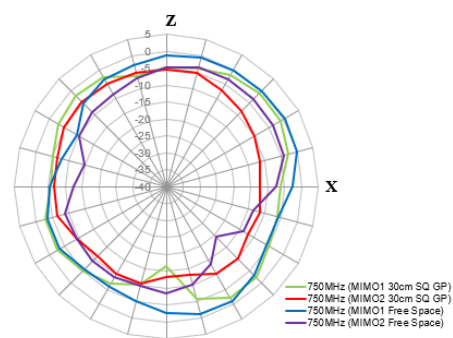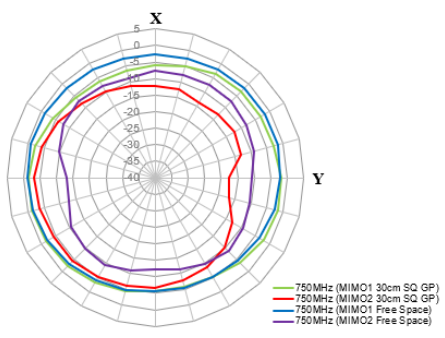




825MHz

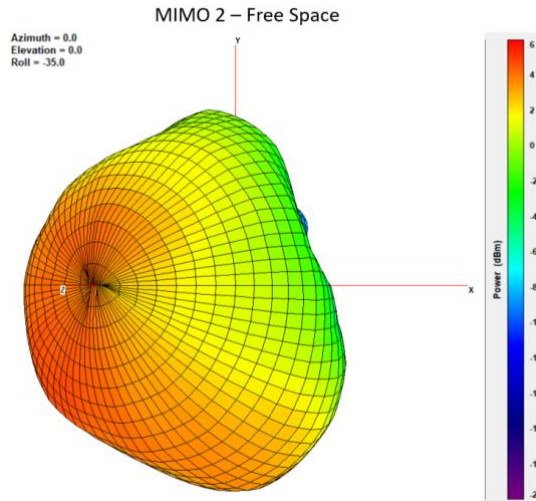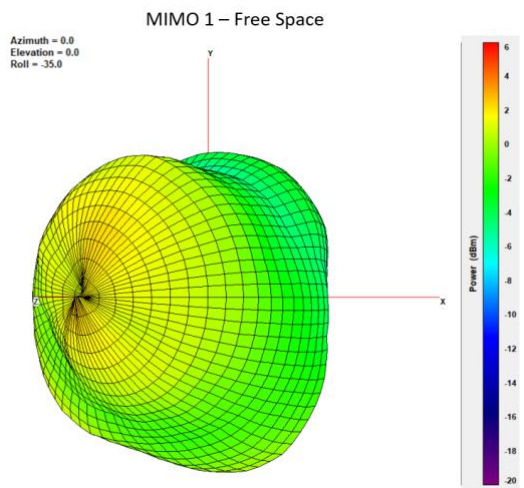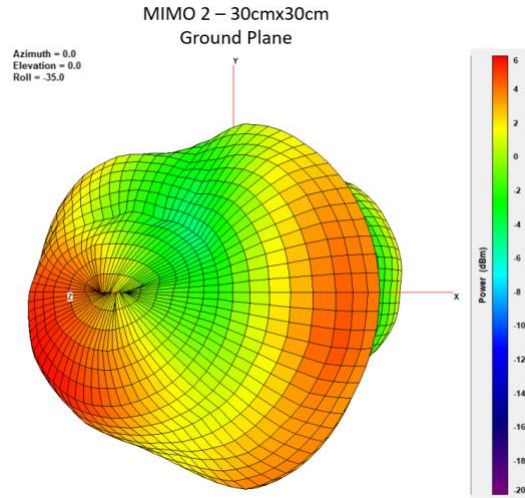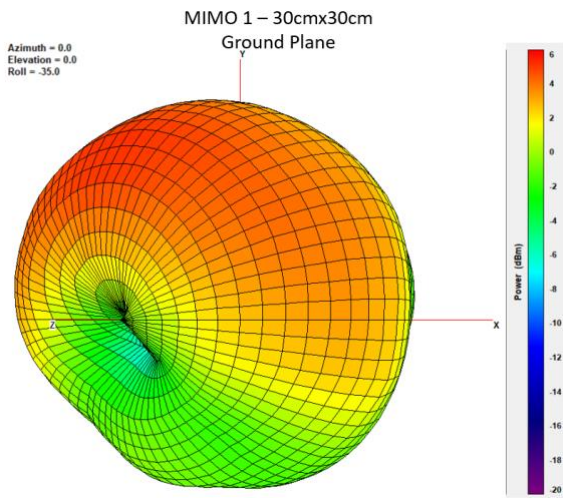





XY Plane

XZ Plane

YZ Plane

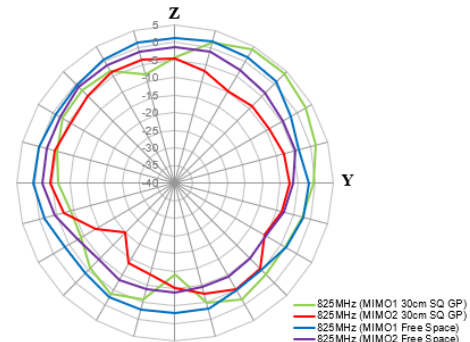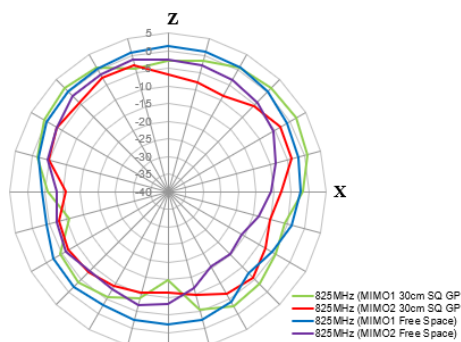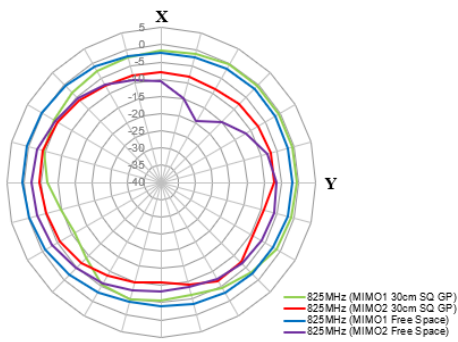




880MHz

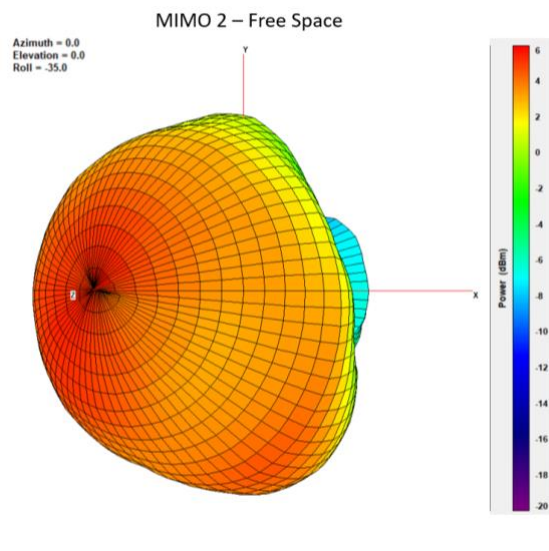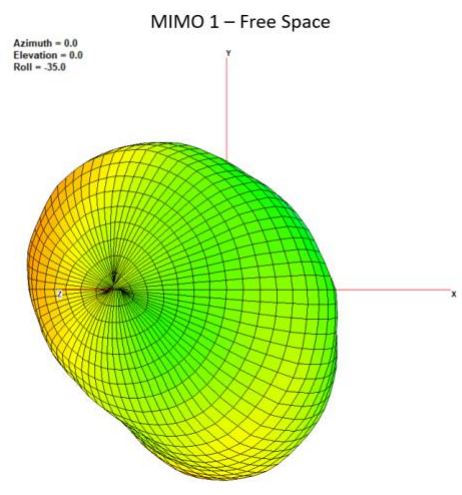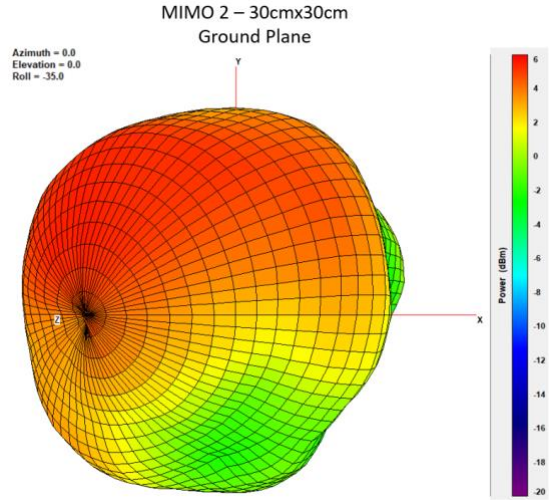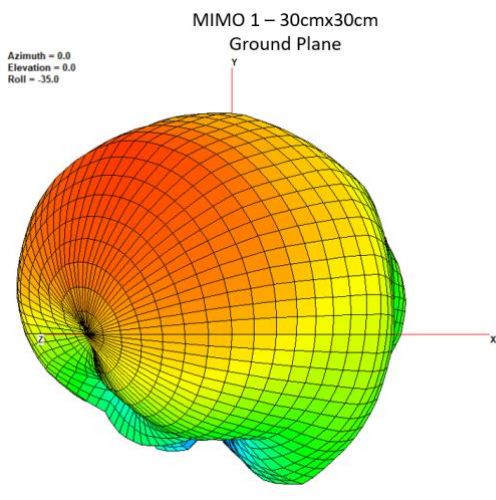





XY Plane

XZ Plane

YZ Plane

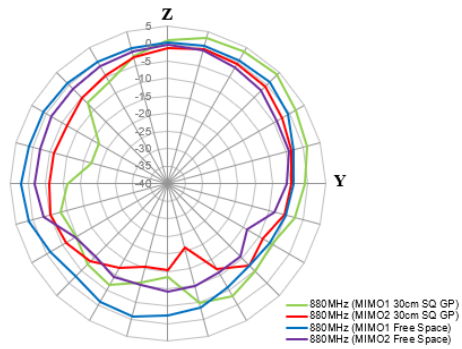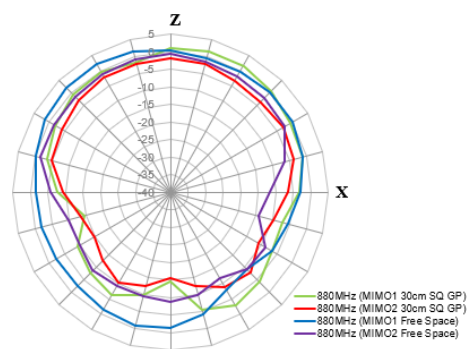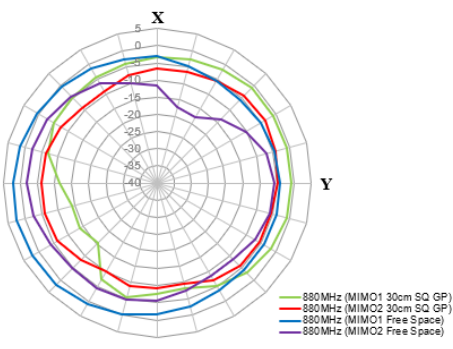




960MHz

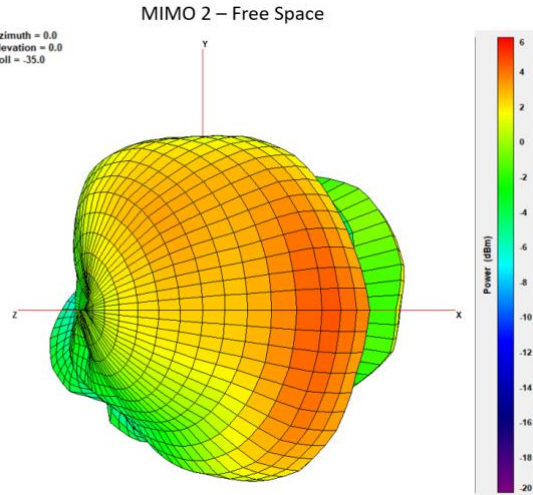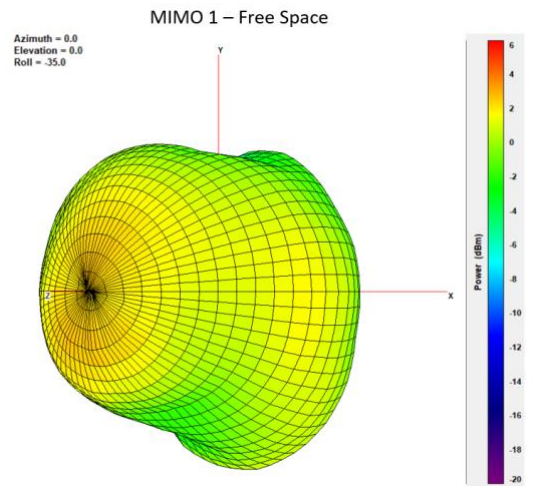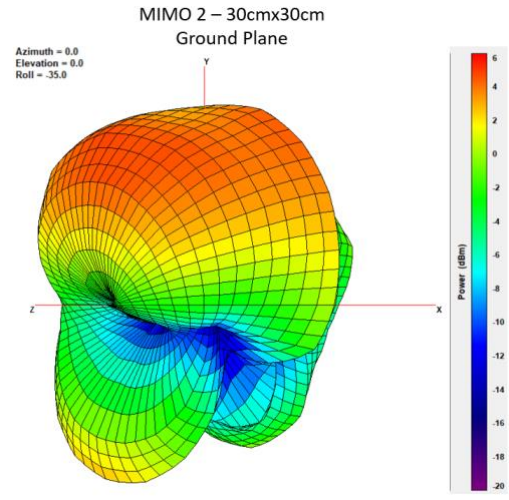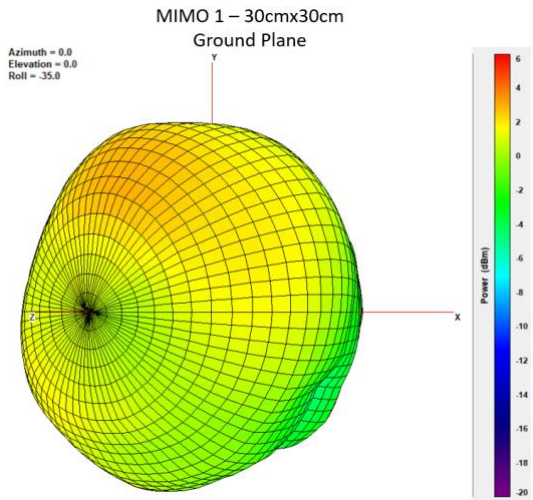





XY Plane

XZ Plane

YZ Plane

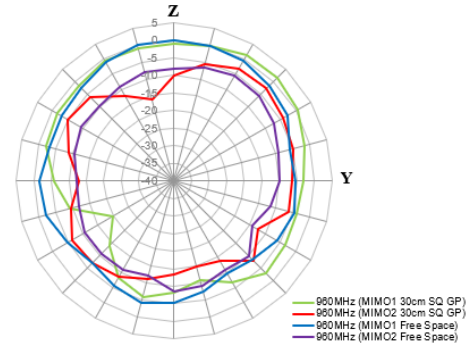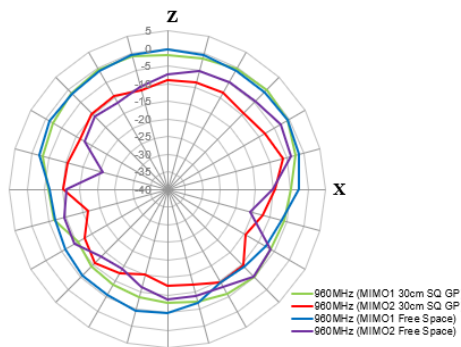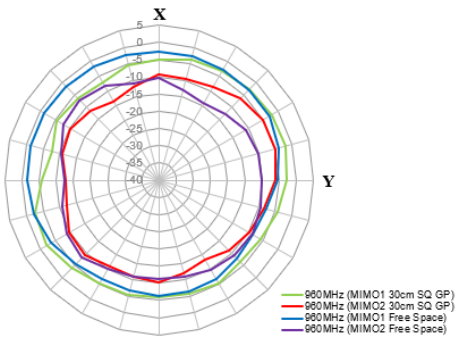




1710MHz

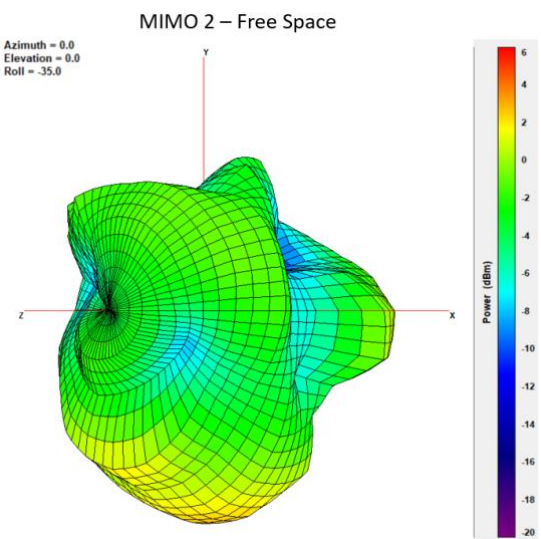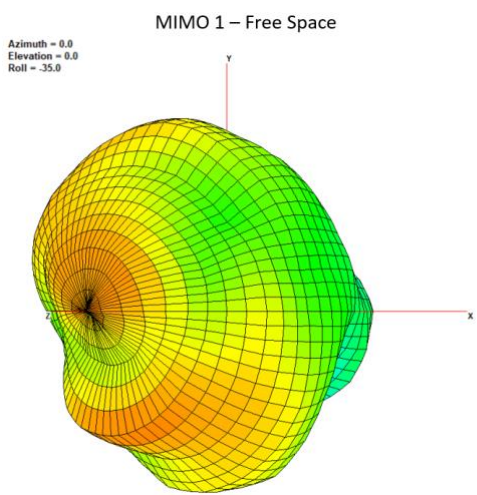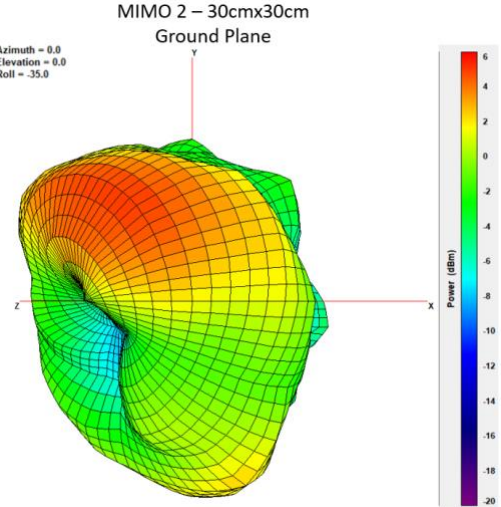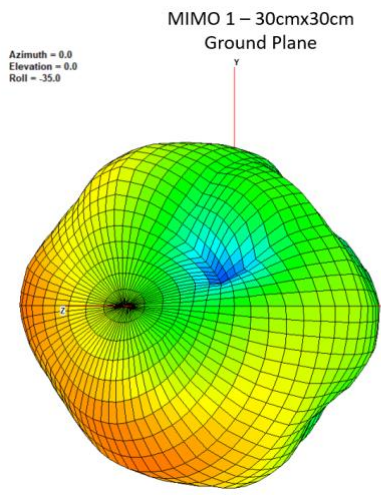





XY Plane

XZ Plane

YZ Plane

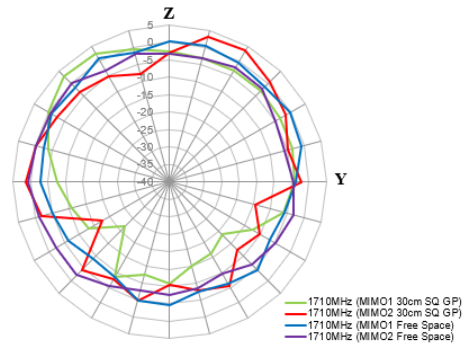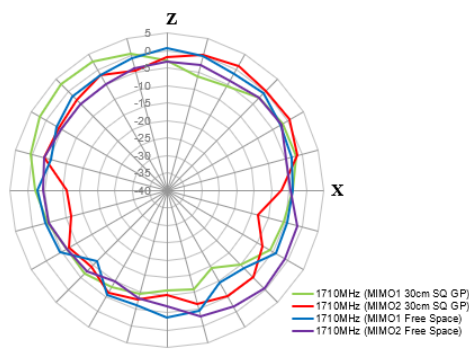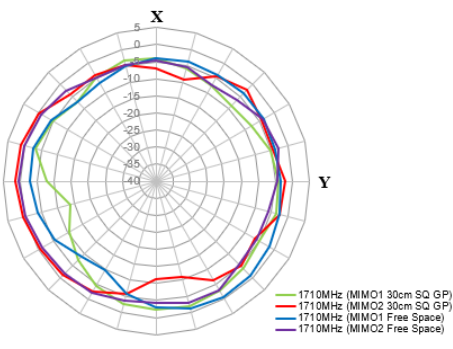




1880MHz

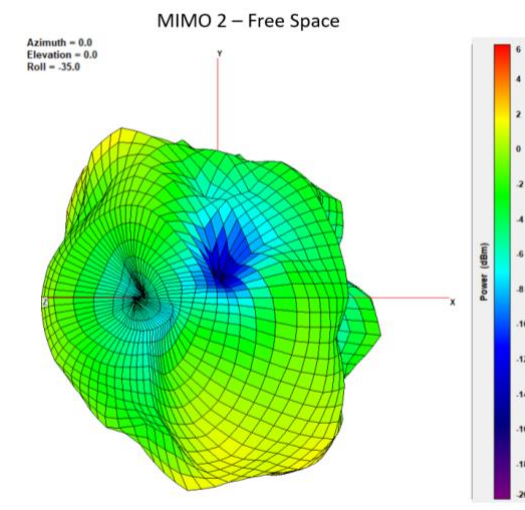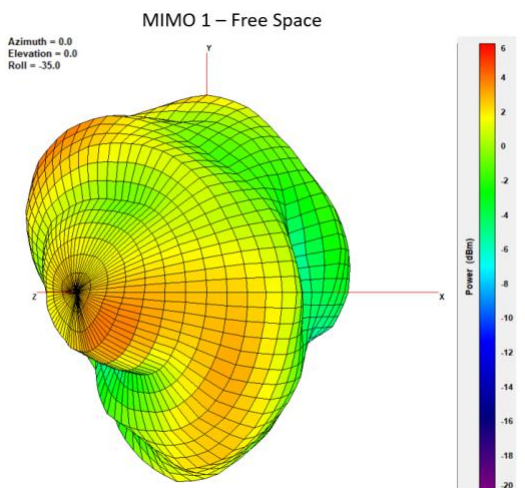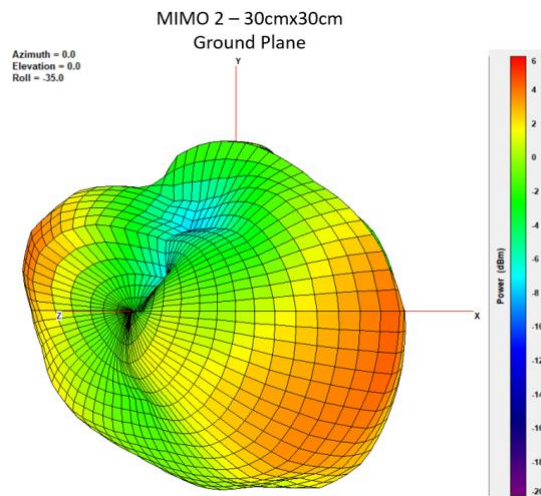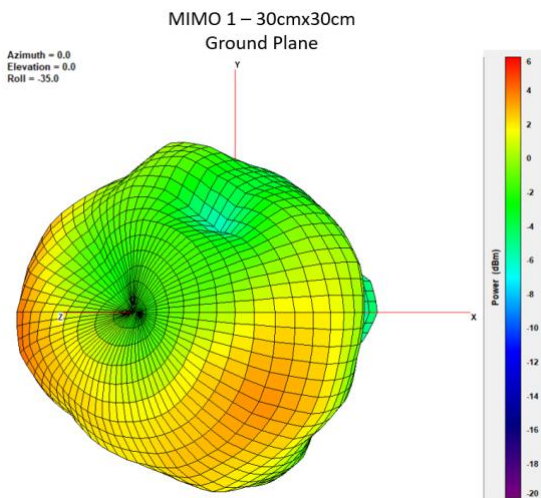

XY Plane


XZ Plane

YZ Plane

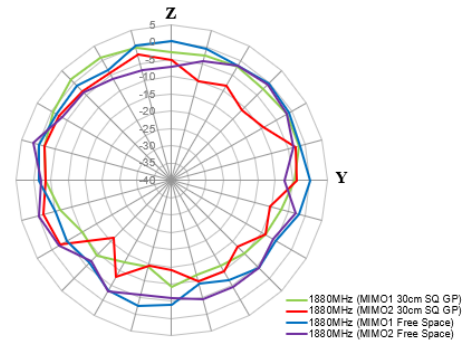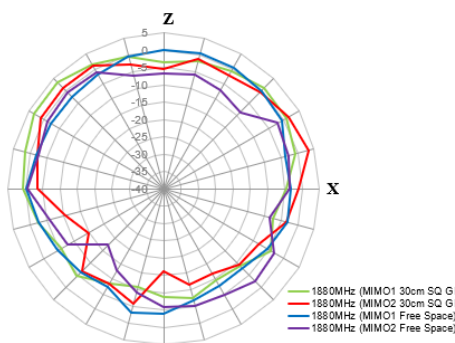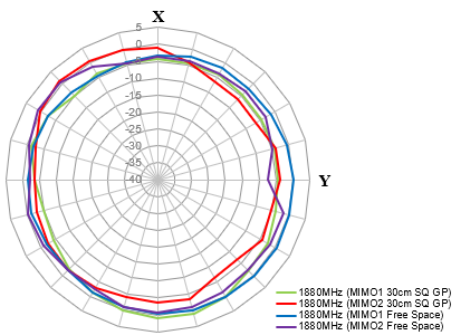


1990MHz


MIMO 1 – 30cmx30cm
Ground Plane
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

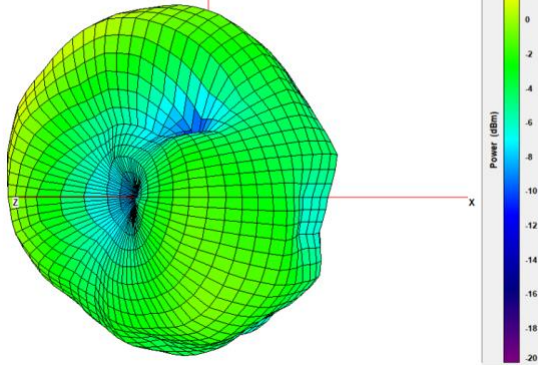


MIMO 2 – 30cmx30cm
Ground Plane
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

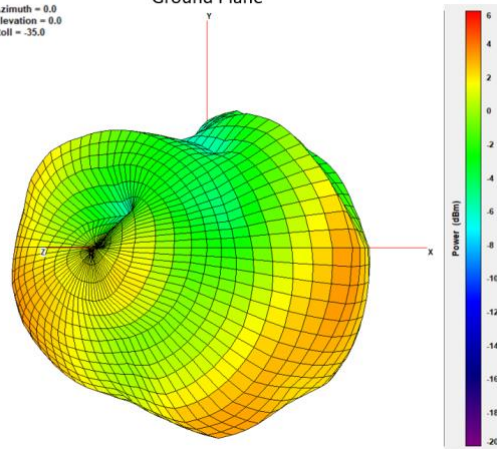

MIMO 1 – Free Space
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

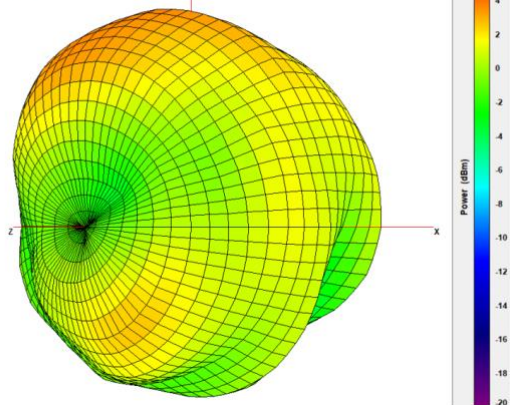




MIMO 2 – Free Space
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

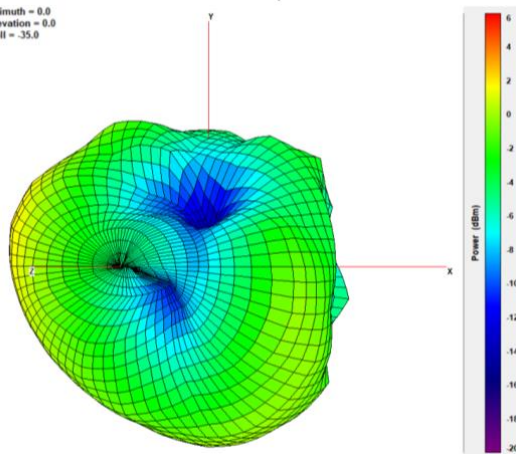





XY Plane

XZ Plane

YZ Plane

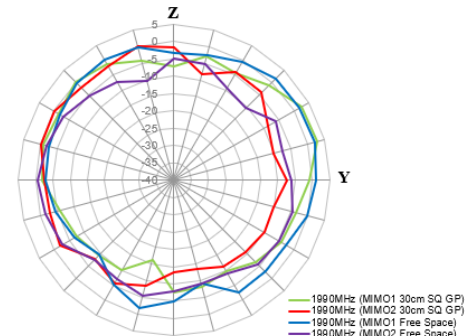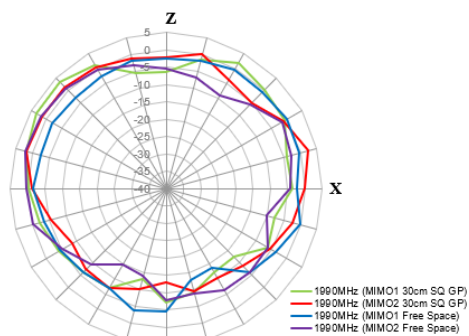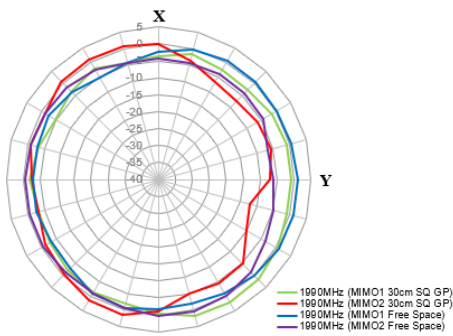




2170MHz

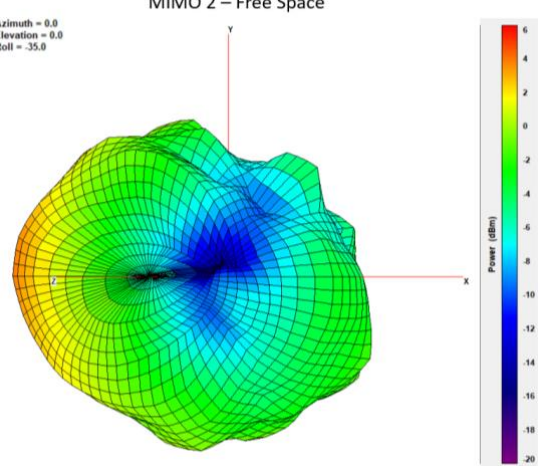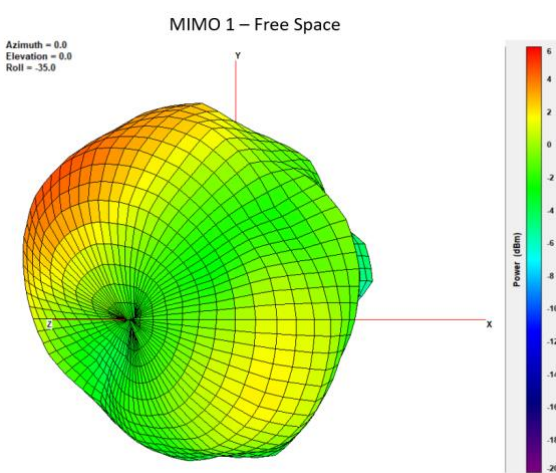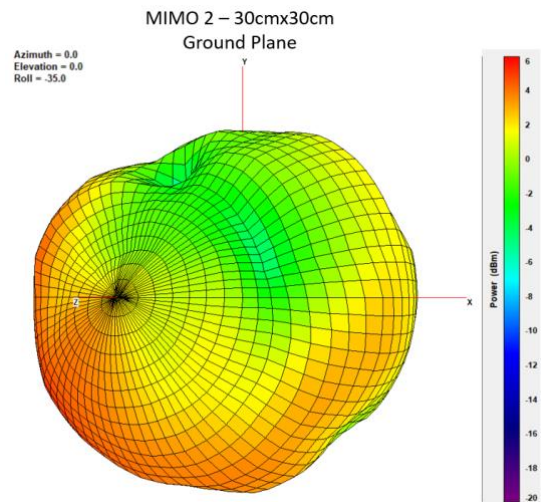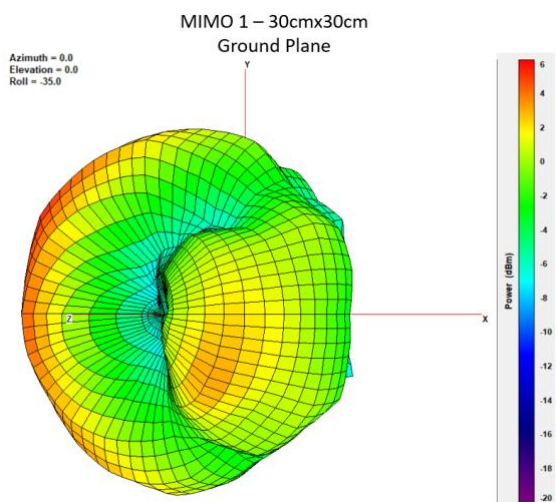

XY Plane

XZ Plane


YZ Plane

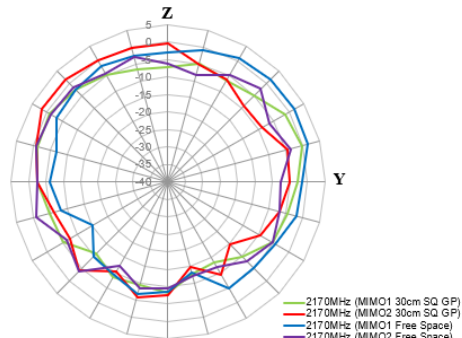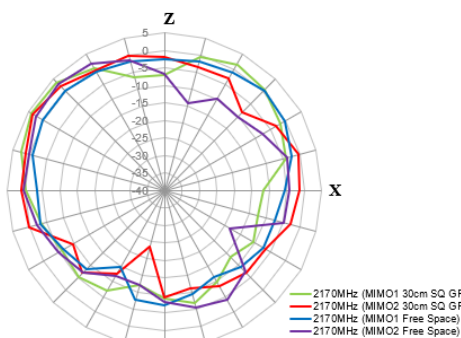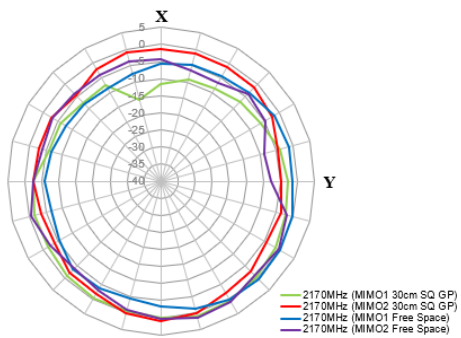

2300MHz


**MIMO 1 – 30cmx30cm
Ground Plane**

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

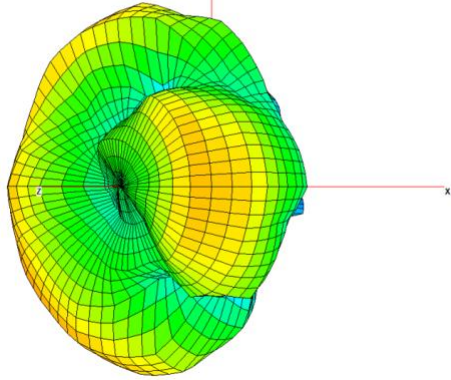


**MIMO 2 – 30cmx30cm
Ground Plane**

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

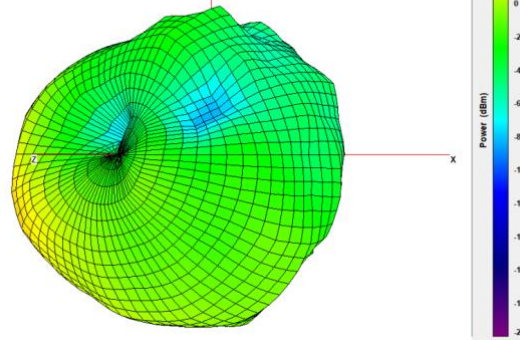


MIMO 1 – Free Space

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

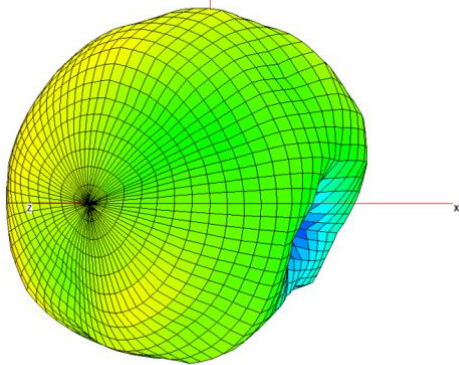

MIMO 2 – Free Space




Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

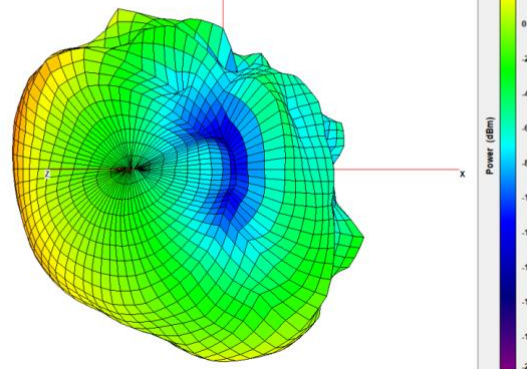


XY Plane

XZ Plane


YZ Plane

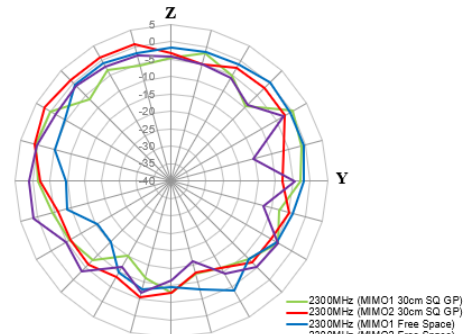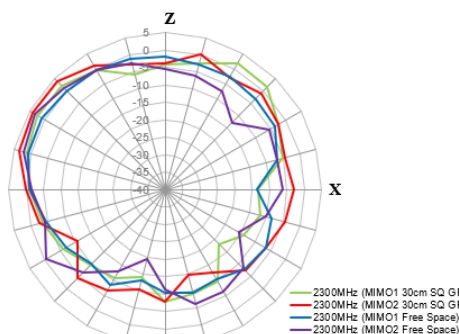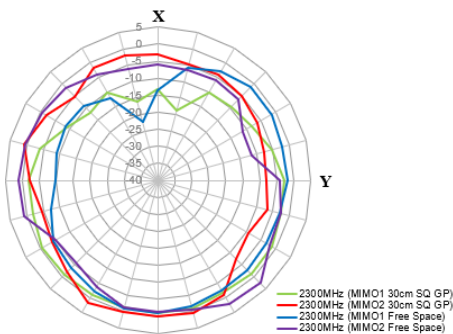





2500MHz

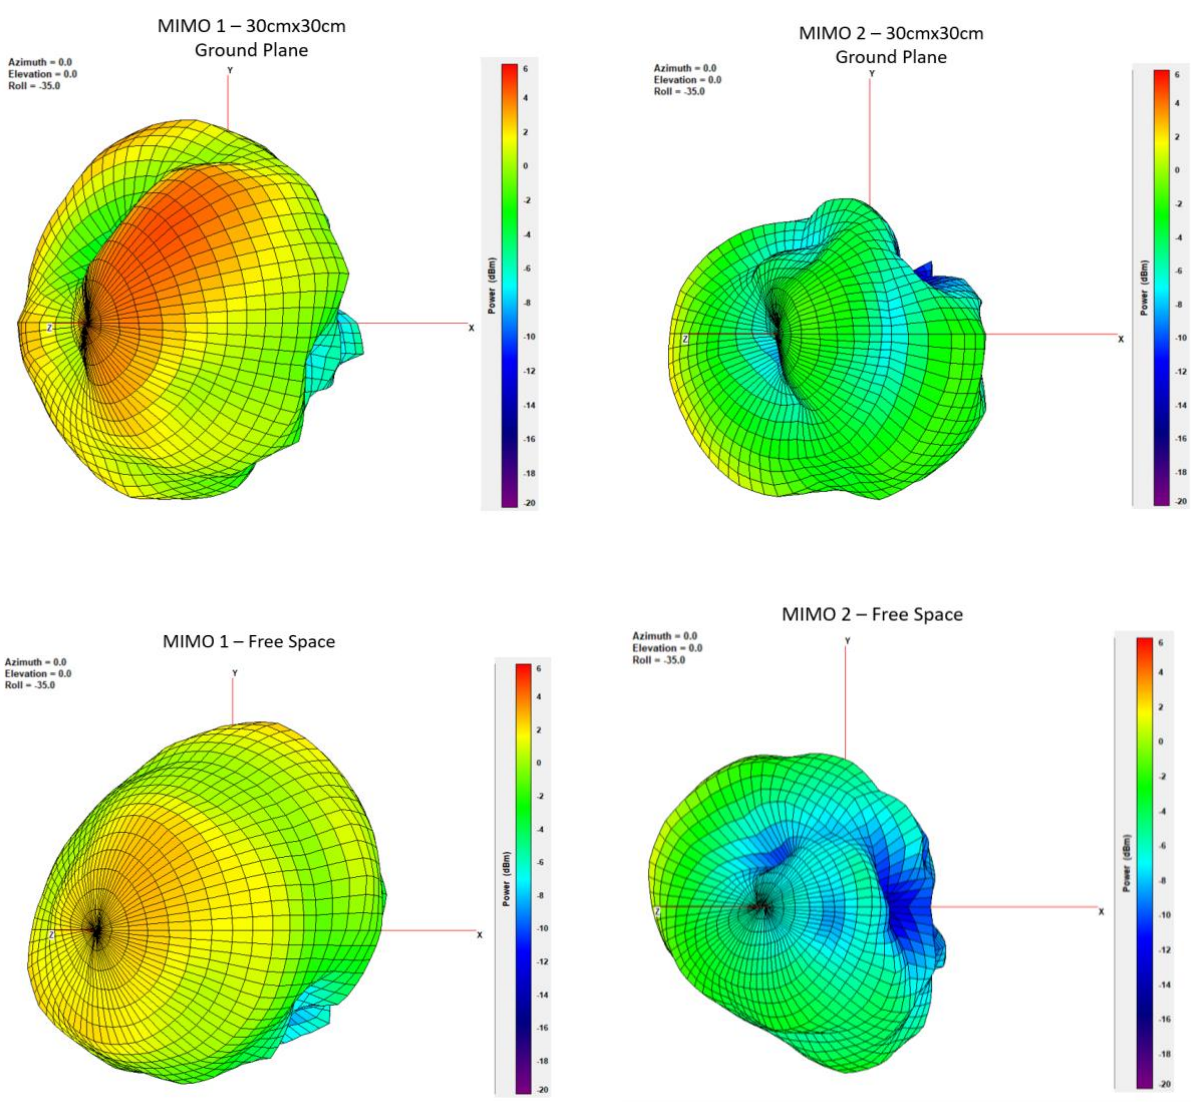

XY Plane
XZ Plane
YZ Plane

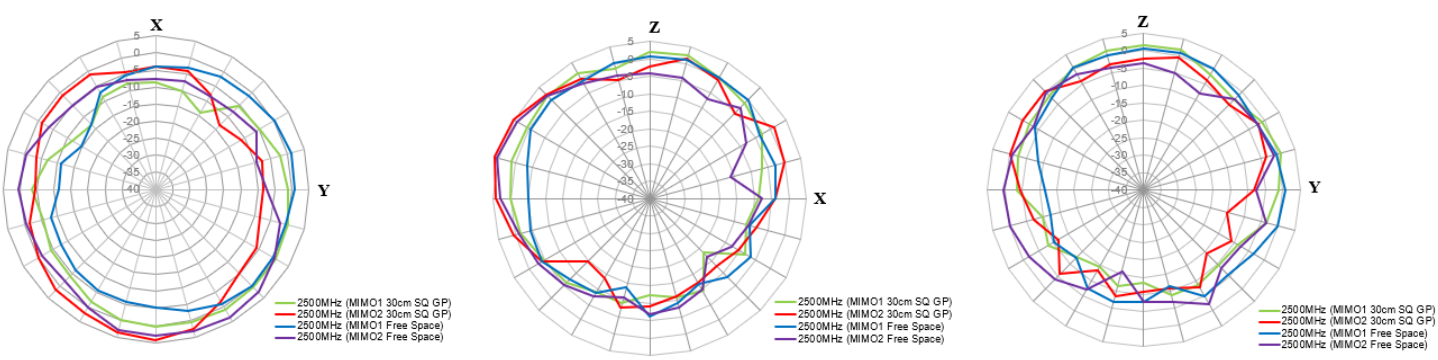




2570MHz

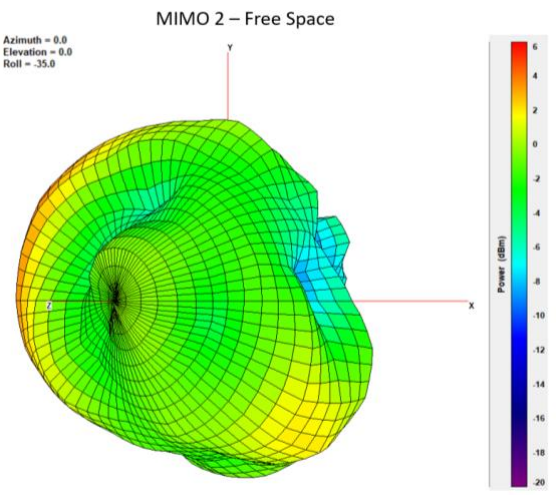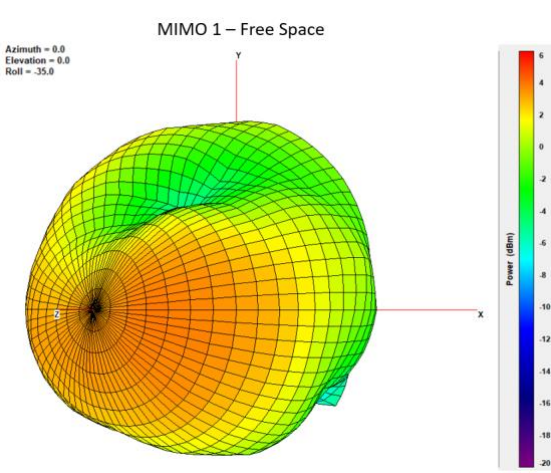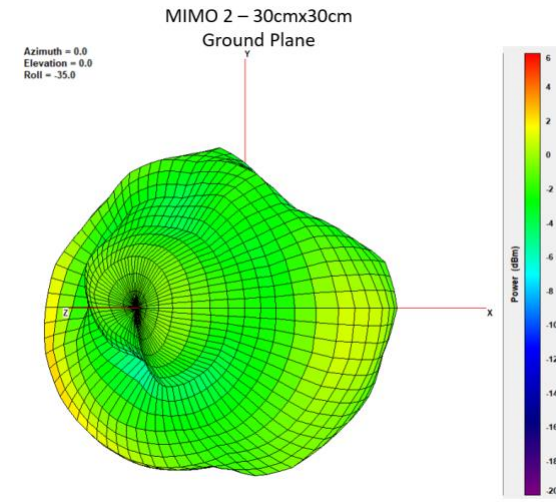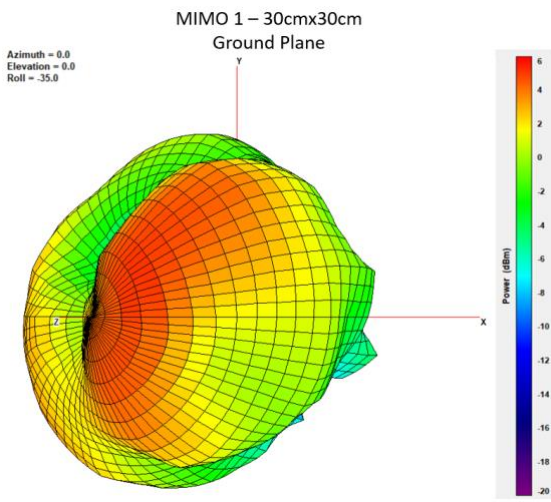



XY Plane

XZ Plane


YZ Plane

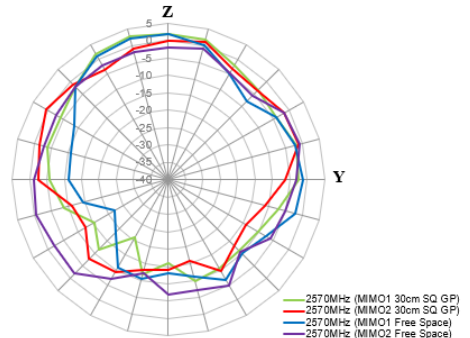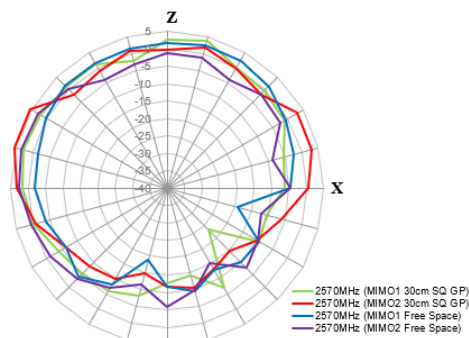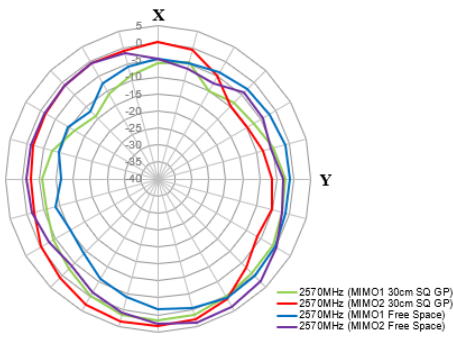

2700MHz

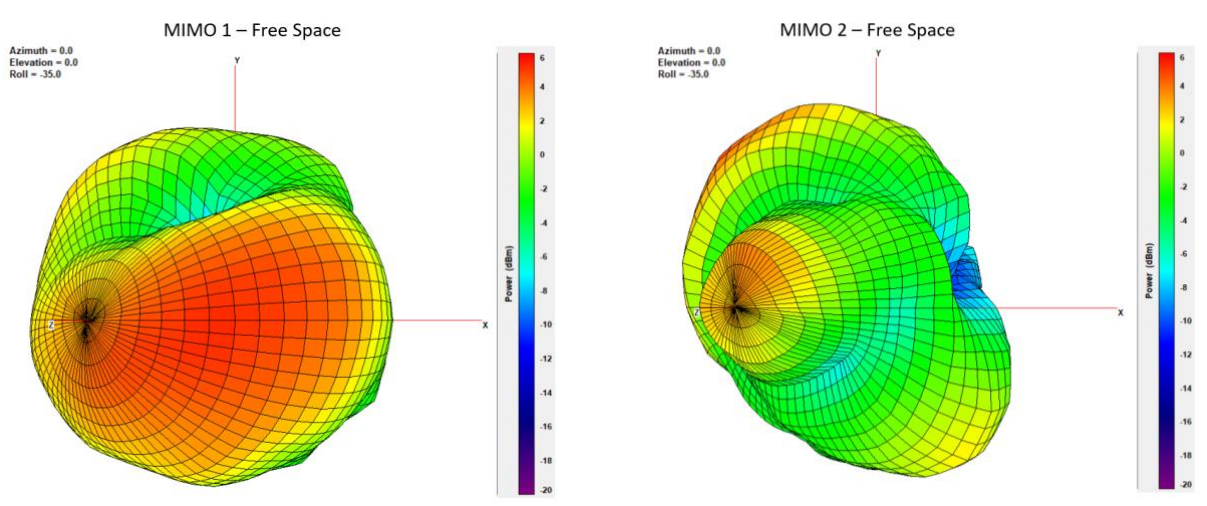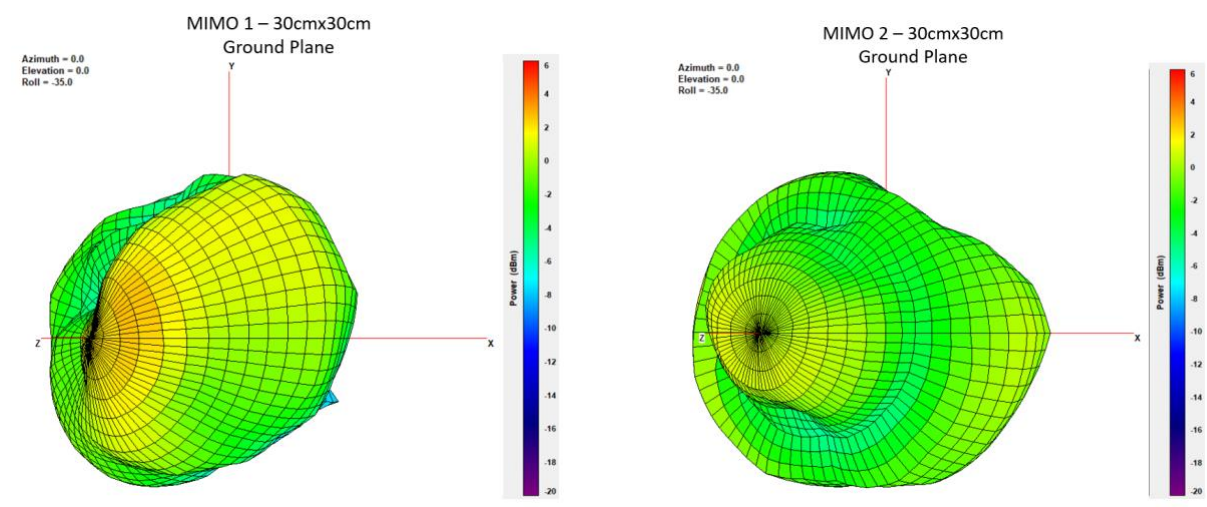


XY Plane
XZ Plane
YZ Plane

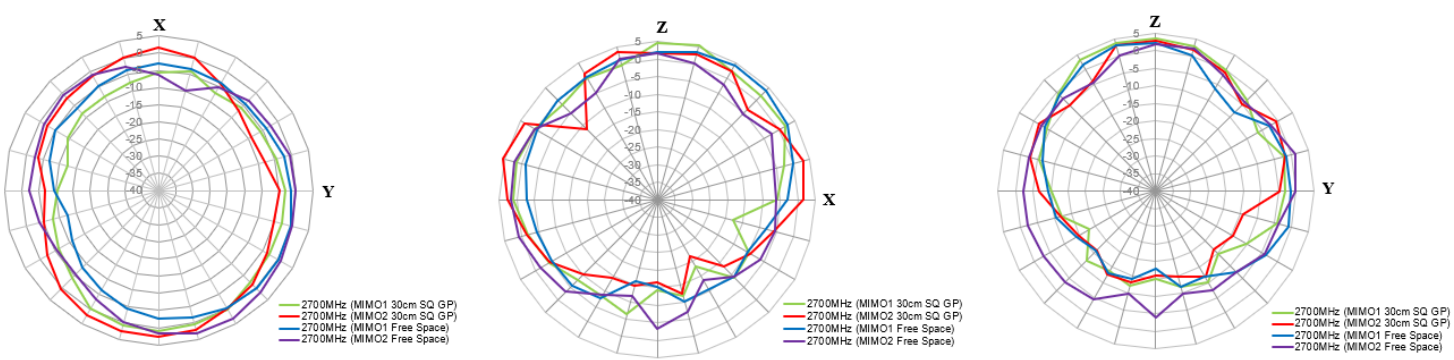

3200MHz


MIMO 1 – 30cmx30cm
Ground Plane

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

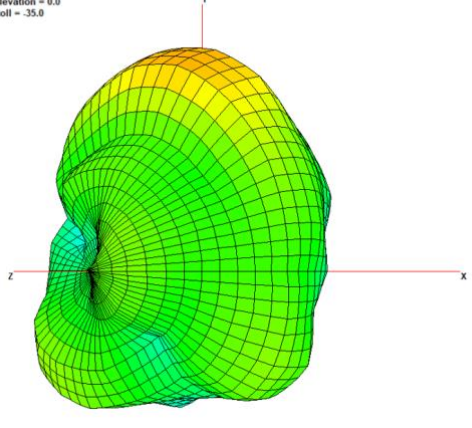


MIMO 2 – 30cmx30cm
Ground Plane

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

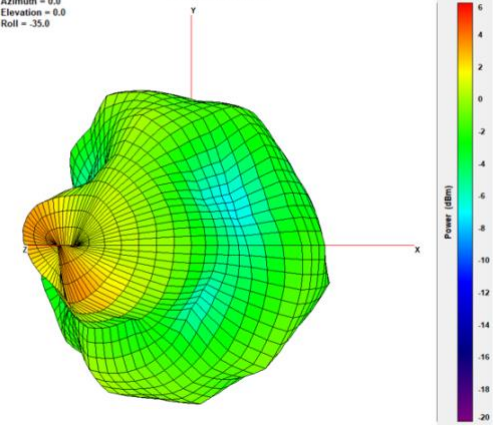


MIMO 1 – Free Space

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

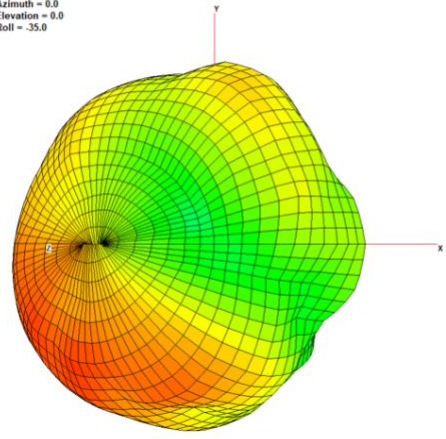

MIMO 2 – Free Space


Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

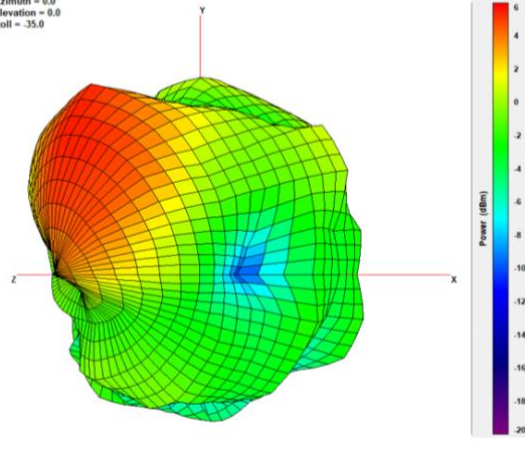


XY Plane

XZ Plane


YZ Plane



— 3200MHz (MIMO1 30cm SQ GP)
— 3200MHz (MIMO2 30cm SQ GP)
— 3200MHz (MIMO1 Free Space)
— 3200MHz (MIMO2 Free Space)










— 3200MHz (MIMO1 30cm SQ GP)
— 3200MHz (MIMO2 30cm SQ GP)
— 3200MHz (MIMO1 Free Space)
— 3200MHz (MIMO2 Free Space)



— 3200MHz (MIMO1 30cm SQ GP)
— 3200MHz (MIMO2 30cm SQ GP)
— 3200MHz (MIMO1 Free Space)
— 3200MHz (MIMO2 Free Space)




4200MHz

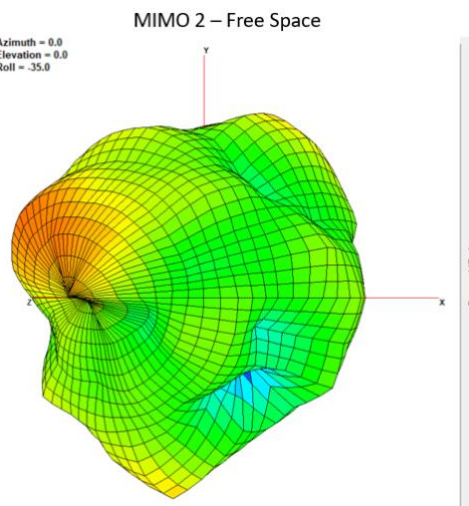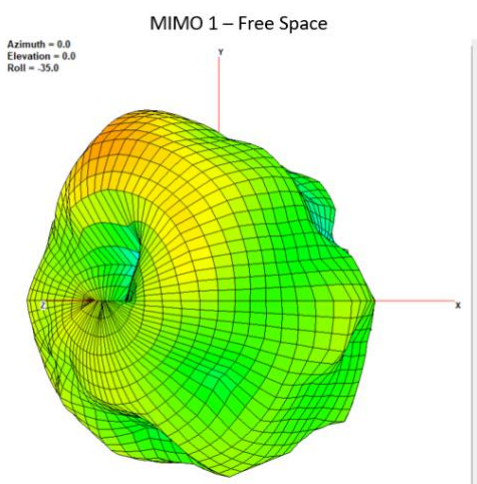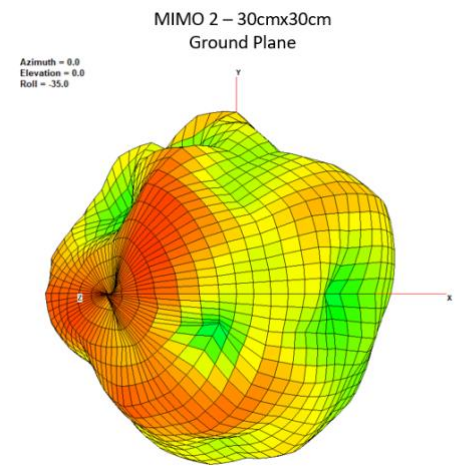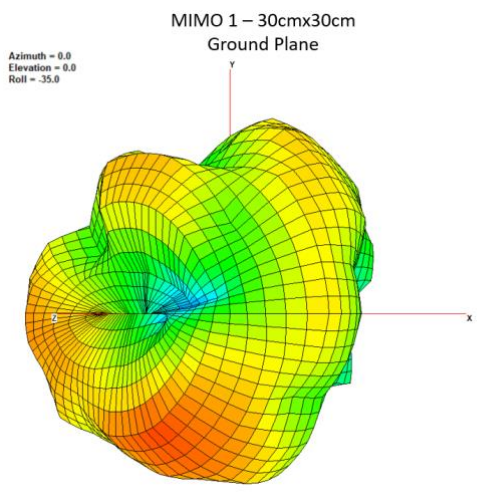

XY Plane


XZ Plane

YZ Plane

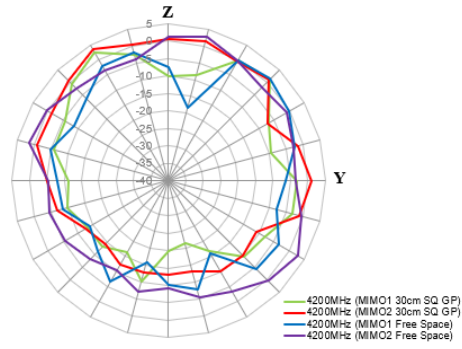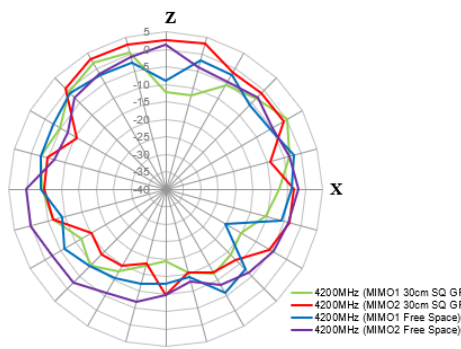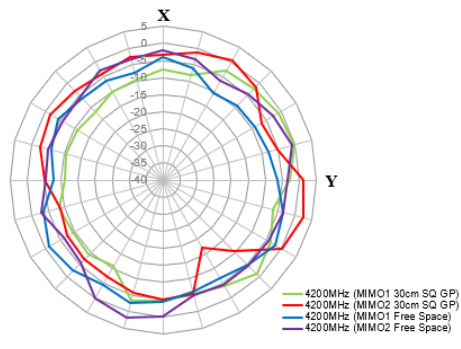


5150MHz


**MIMO 1 – 30cmx30cm
Ground Plane**
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

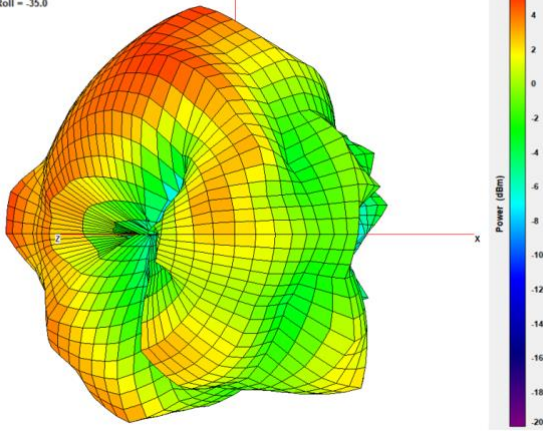


**MIMO 2 – 30cmx30cm
Ground Plane**
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

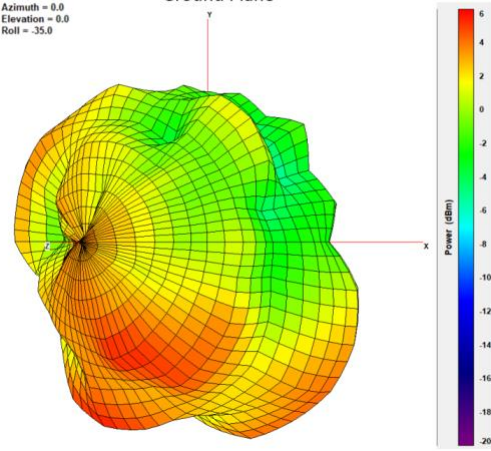

MIMO 1 – Free Space
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

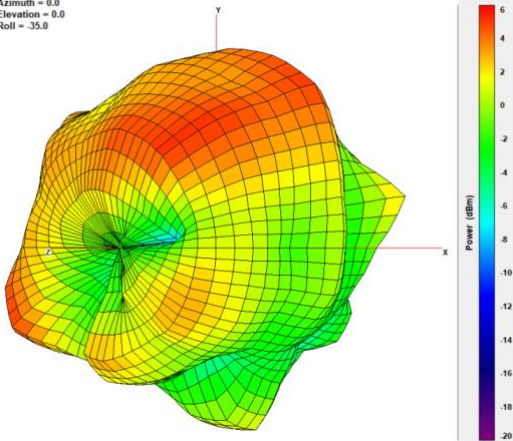




MIMO 2 – Free Space
Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

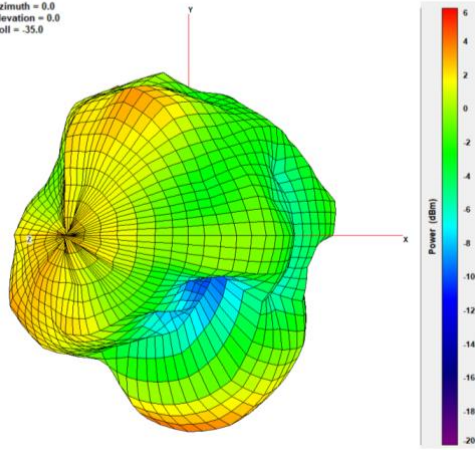

XY Plane

XZ Plane


YZ Plane

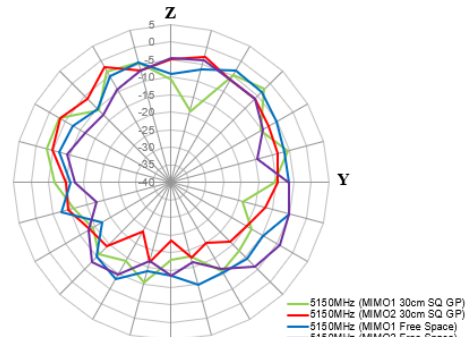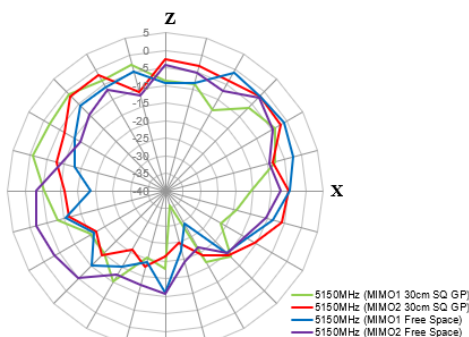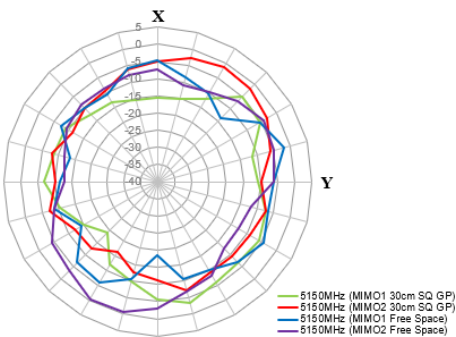

5550MHz


**MIMO 1 – 30cmx30cm
Ground Plane**

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

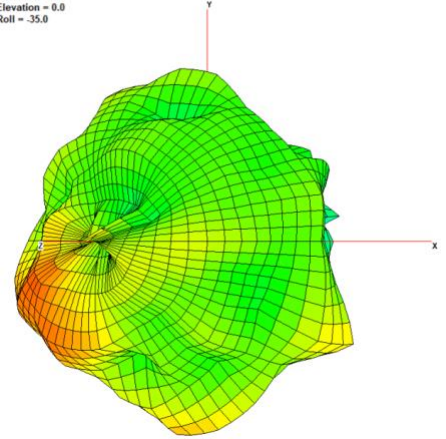


**MIMO 2 – 30cmx30cm
Ground Plane**

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

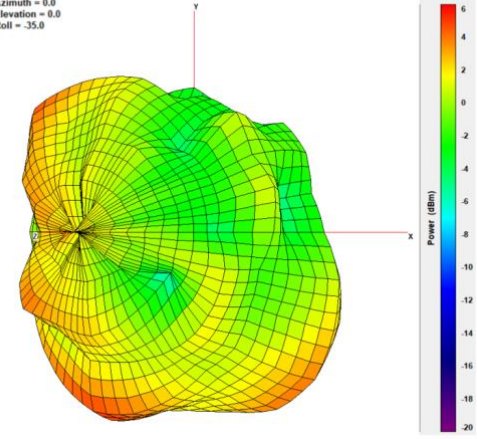


MIMO 1 – Free Space

Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

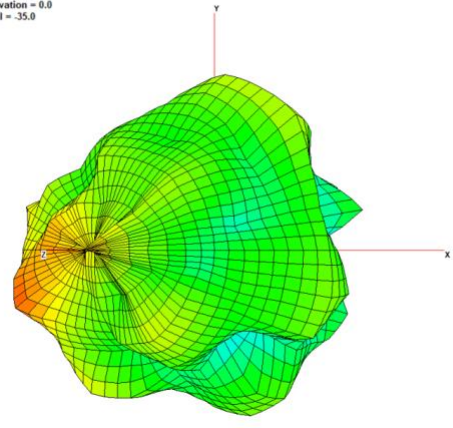

MIMO 2 – Free Space




Azimuth = 0.0
Elevation = 0.0
Roll = -35.0

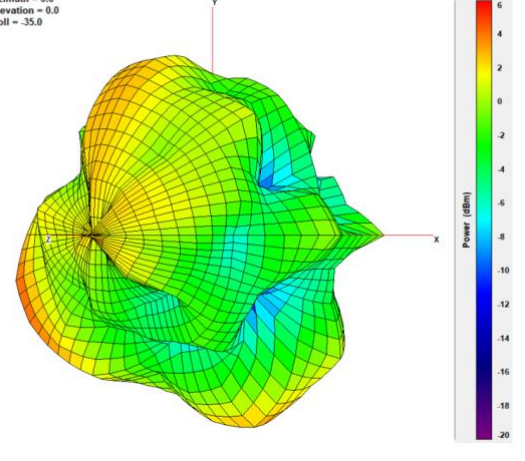


XY Plane

XZ Plane

YZ Plane

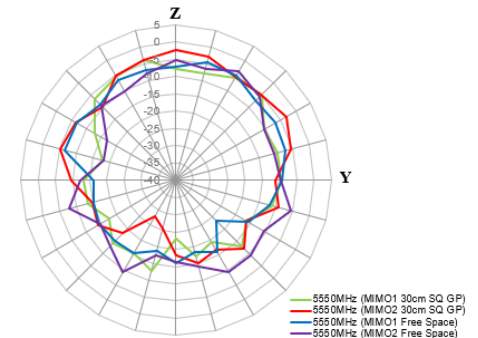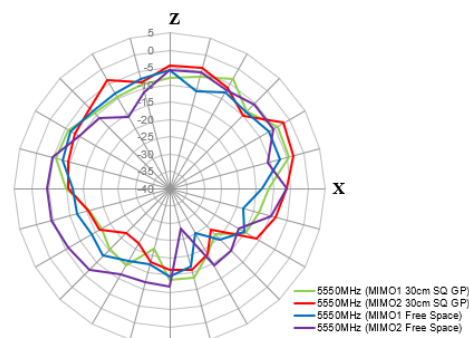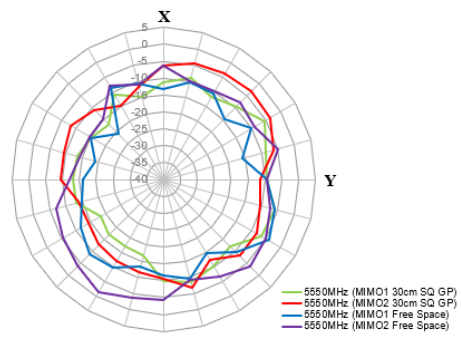


4.3 Wi-Fi 3D and 2D Radiation Patterns

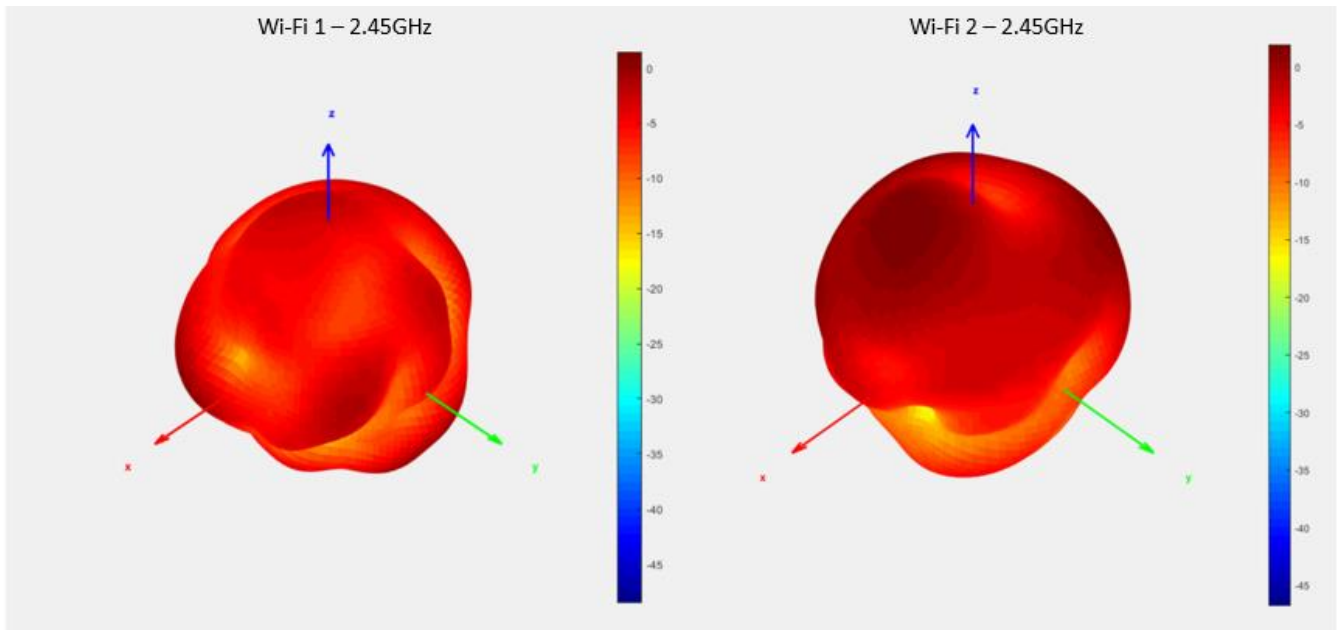


XZ Plane YZ Plane XY Plane


Wi-Fi 1

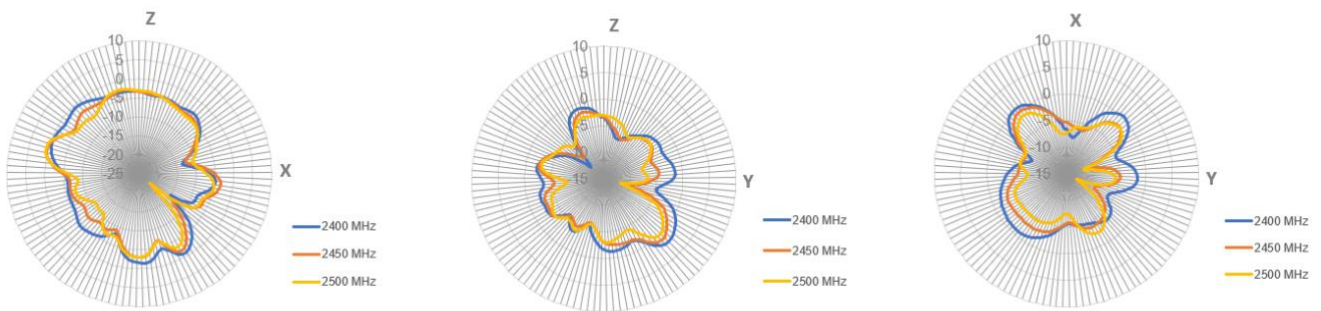


Wi-Fi 2

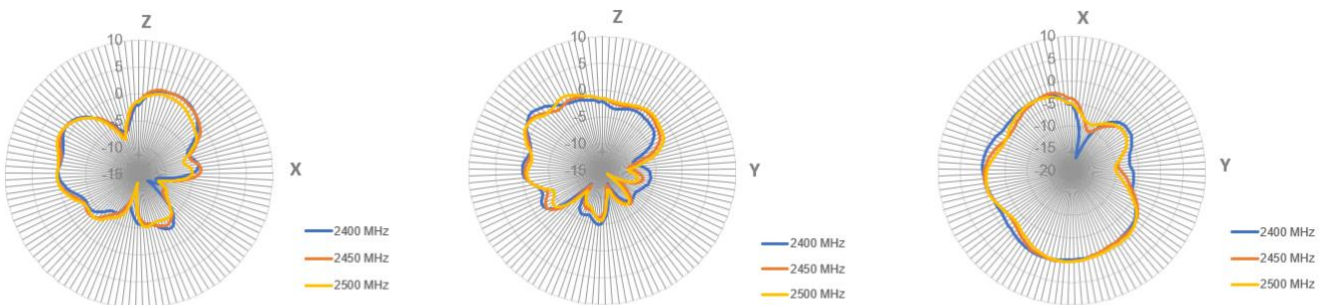


5.5GHz

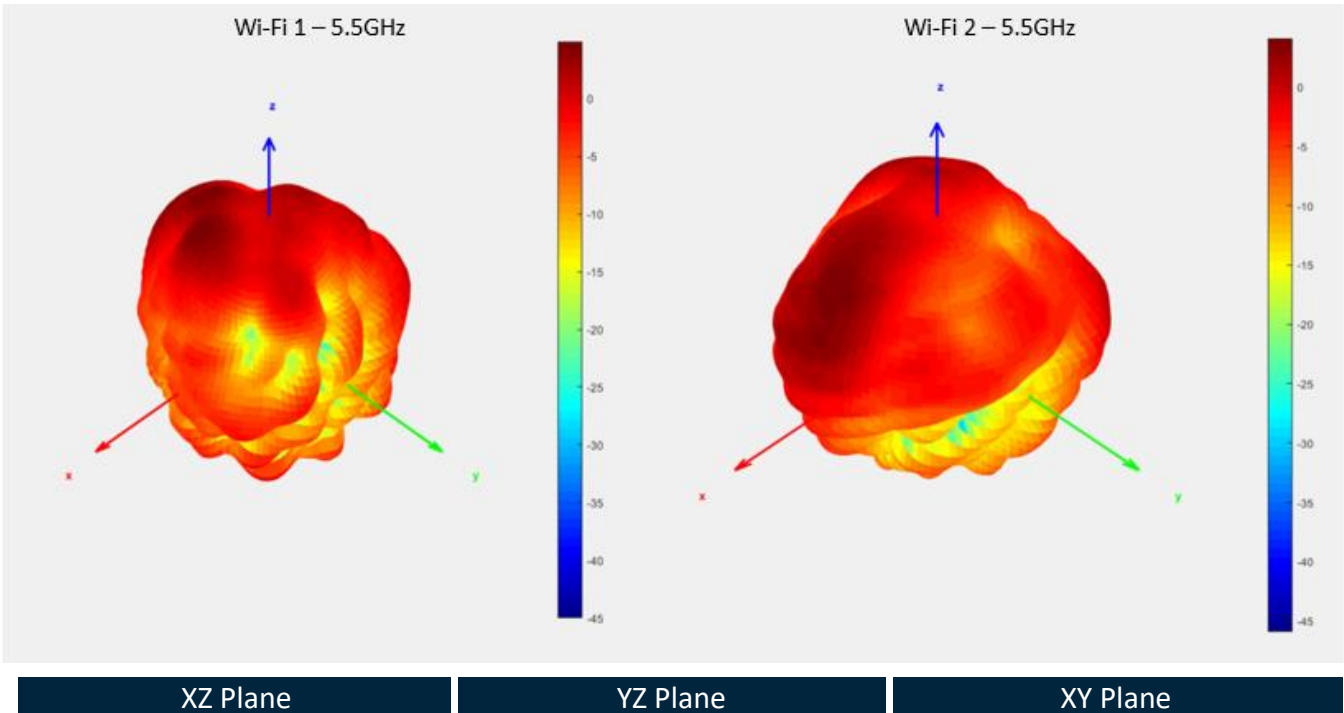


Wi-Fi 1

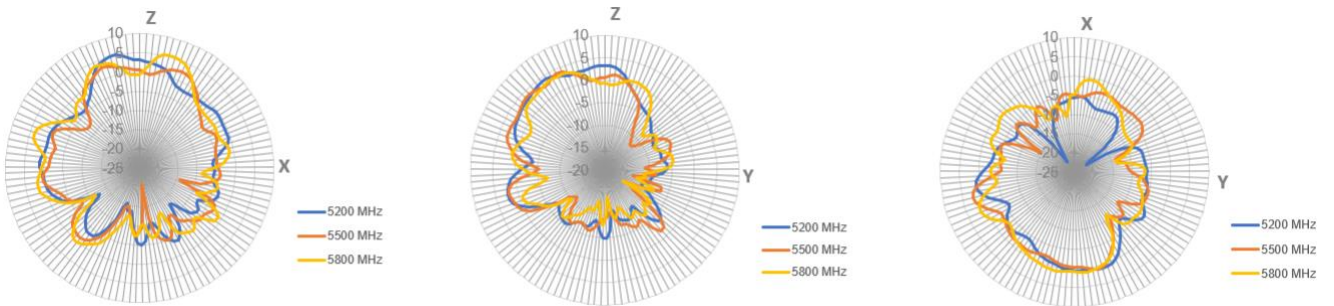

Wi-Fi 2

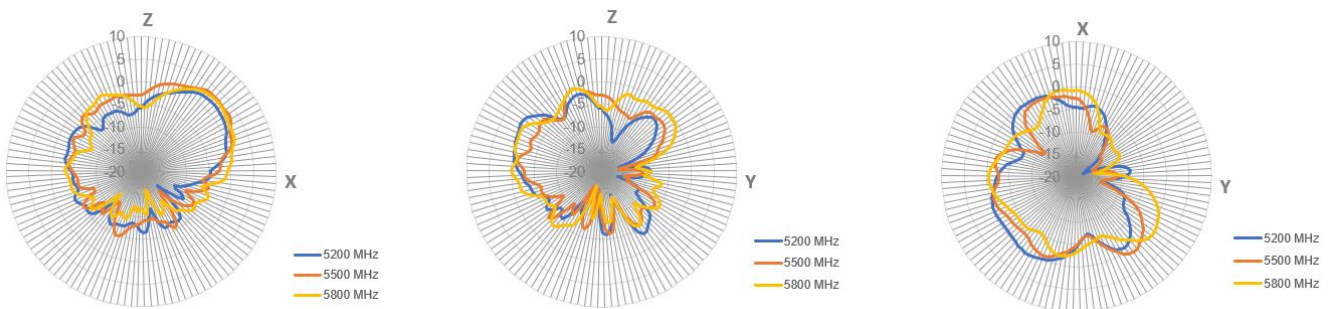

5.8GHz

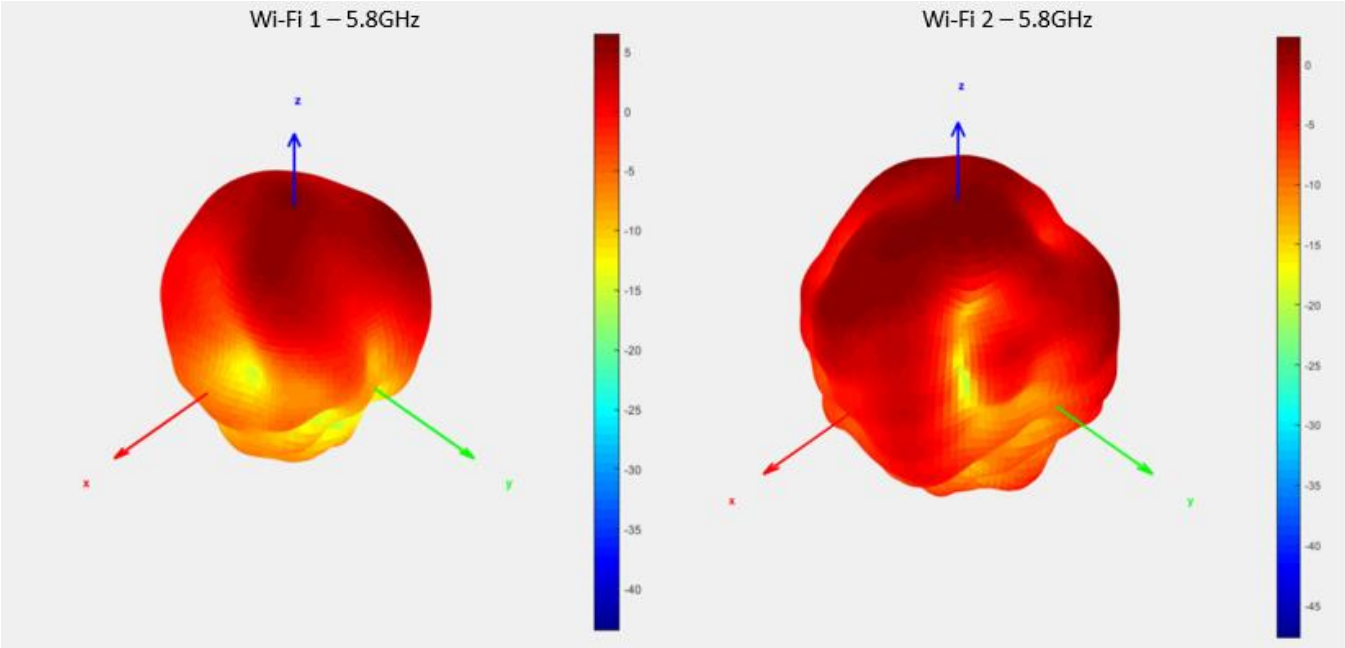


XZ Plane


YZ Plane

XY Plane

Wi-Fi 1

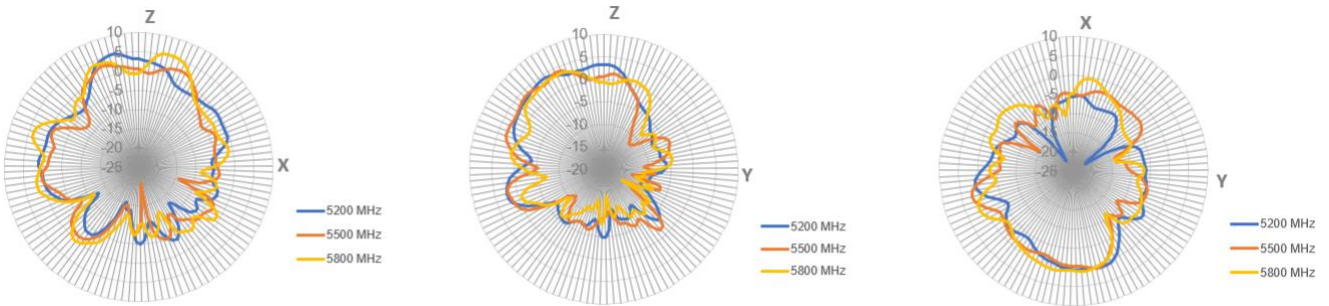

Wi-Fi 2

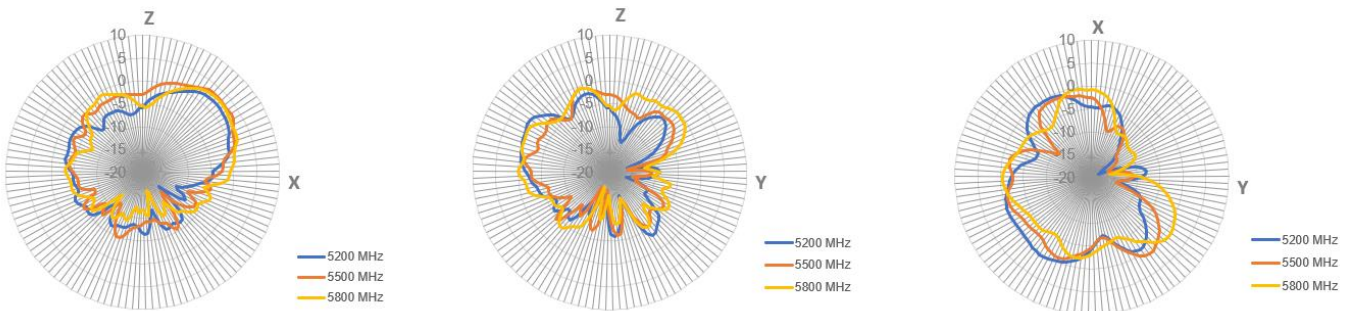

5. Mechanical Drawing

6	5	4	3	2	1		
ISO NO: EDW-18-8-1376		REV	ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE
<Release>		Δ	ALL	Initial Design	Eva	Paul	2018/10/30

Bottom Thread View

Cable Outlet

UNLESS OTHERWISE SPECIFIED TOLERANCES ON:

.X± 0.2

XX± 0.5 .XX± 0.1

X± 0.3 .XXX± 0.05

DATE: 2014/06/23

UNIT: mm

THIRD ANGLE PROJECTION

APPROVED BY: Wayne

CHECKED BY: Aine

DRAWN BY: Sandy

MAT'L:

FINISH:

SCALE: 1/2

REV

TAOGLAS TW Design Centre

This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.

Partheon 4in1 Screwmount Antenna

2.4/5 GHz MIMO 1	3M CFD-200 RP-SMA(M)
2.4/5 GHz MIMO 2	3M CFD-200 RP-SMA(M)
2G/3G/4G MIMO 1	3M CFD-200 SMA(M) ST
2G/3G/4G MIMO 2	3M CFD-200 SMA(M) ST


TITLE. :

PART NO. : MA761.B.BICG.003

Name	P/N	Material	Finish	QTY
1 Housing	000111000015A	ABS+PC	Black	1
2 Waterproof Rubber	000711F000015A	Silicone Rubber	Black	1
3 Adhesive Foam(Black Foam)	001011F030015A	3M 9448HK+CR4305	White Liner	1
4 Washer M30	000411F010015A	Steel	Ni Plated	1
5 M30 Nut	000411F000015A	Steel	Ni Plated	1
6 M30x2P Thread 32L	000311F000015A	Zinc Alloy	Ni Plated	1
7 Rubber Stopper	000711F010015A	Silicone Rubber	Black	1
8 2.4/5.8 GHz MIMO1 Label	001016C040000A	PEPA	Yellow	Black 1
9 2.4/5.8 GHz MIMO2 Label	001016C050000A	PEPA	Red	1
10 2G/3G/4G MIMO1	001012L080015A	PEPA	Gray	1
11 2G/3G/4G MIMO2	001012L090015A	PEPA	White	1
12 Heat Shrink Tube	001315C030000A	PE	Black	4
13 CFD200 Coaxial Cable	301415C010000A	PE	Black	4
14 RP-SMA(M)ST	200212F000015A	Brass	Au Plated	2
15 SMA(M)ST	200212G010015A	Brass	Au Plated	2
16 Barcode Label	001013G000015A	PEPA	White	1


6	5	4	3	2	1
---	---	---	---	---	---

6. Installation

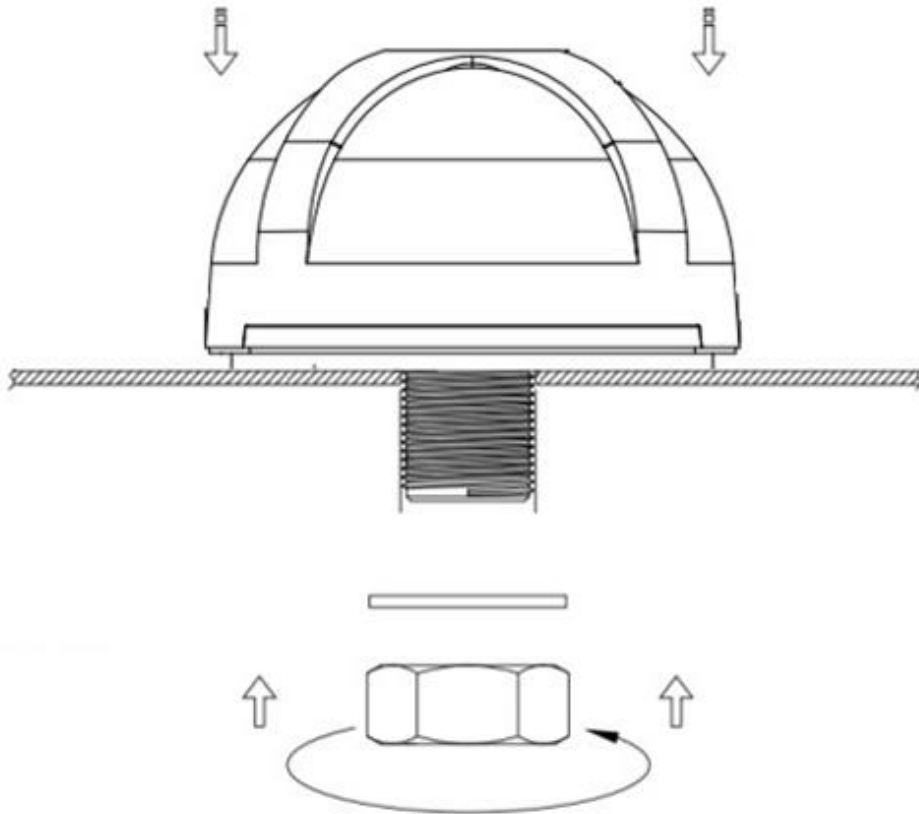

Recommended torque for mounting: 5-7Nm

(Torque value obtained with antenna mounted on 1mm thick SUS-316 bracket)



**Recommending
Mounting Hole**


Unit:mm

7. Packaging

1pc MA761.B.BICG.003 per box
 Box Dimensions – 185 x 170 x 177mm
 Weight – 1.4Kg

8pcs MA761.B.BICG.003 per Carton
 Carton Dimensions – 384 x 350 x 388mm
 Weight – 11.2Kg

32 Cartons per pallet
 Pallet Dimensions – 1100 x 1100mm

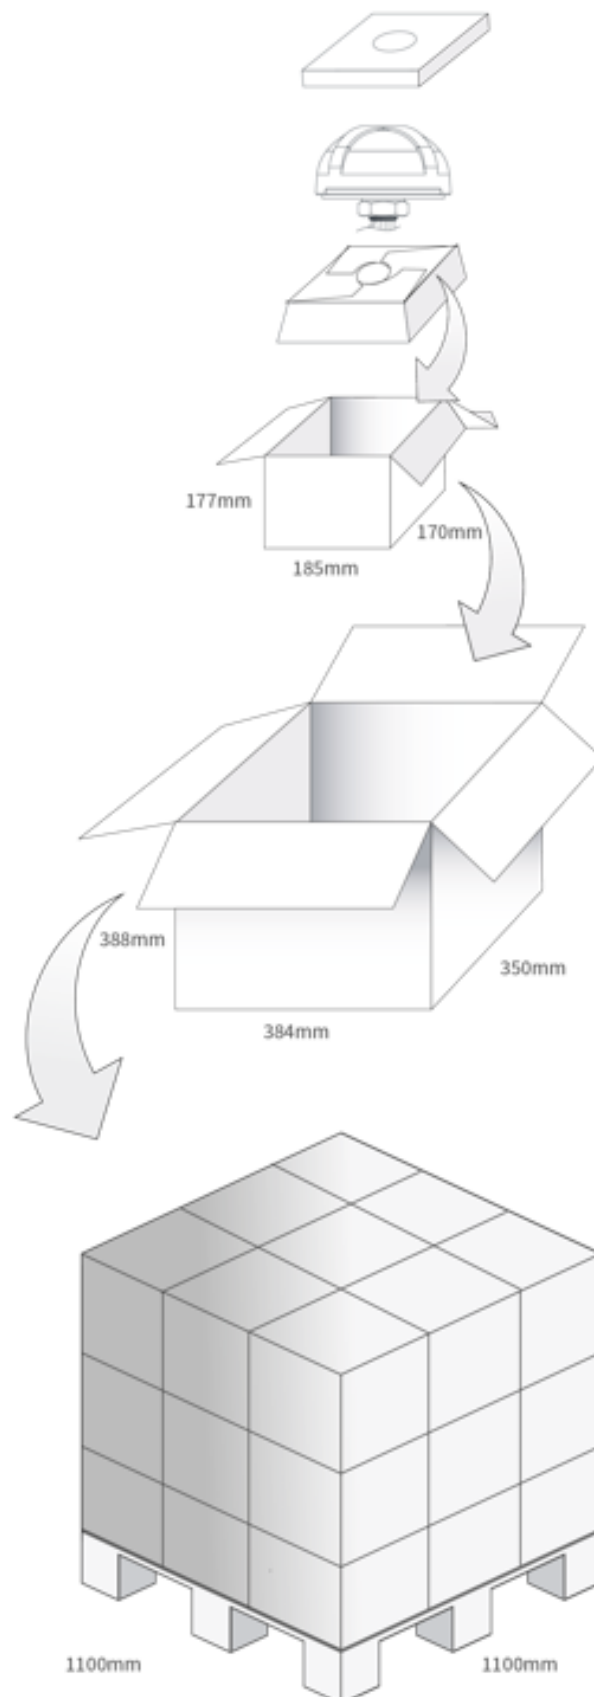

Changelog for the datasheet

SPE-14-8-076 - MA761.B.BICG.003

Revision: C (Current Version)

Date:	2021-11-11
Changes:	Rebranded as 5G, updated datasheet template to new template & updated recommended torque for mounting.
Changes Made by:	Gary West

Previous Revisions

Revision: B

Date:	2017-04-06
Changes:	Added LTE Band Table
Changes Made by:	Peter Monahan

Revision: A (Original First Release)

Date:	2014-07-29
Notes:	
Author:	WY



TAOGLAS®

www.taoglas.com

