



# TAOGLAS®



# Datasheet

## Synergy 6-in-1 Antenna

**Part No:**  
MA1506.AK.001

### Description:

- 1\*Active GNSS with RG-174 & SMA(M)
- 2\*5G/4G MIMO with RG-174 & SMA(M)
- 3\*Wi-Fi MIMO with RG-174 & RP-SMA(M)

### Features:

- 2 x 5G/4G MIMO Antenna
- 3 x Wi-Fi 2.4GHz/5GHz MIMO Antenna
- 1 x Active GPS/GLONASS/BeiDou Antenna Front End GNSS SAW Filter
- IP67 Rated Waterproof Enclosure
- High Efficiency/Peak Gain Outdoor Antenna
- Cable: 300mm RG-174 with 4700mm TGC-200
- Connectors: SMA(M) / RP-SMA(M)
- RoHS & REACH Compliant

1. Introduction	3
2. Specifications	4
3. Active Antenna Characteristics	10
4. Antenna Characteristics	16
5. Radiation Patterns	20
6. Mechanical Drawing	47
7. Packaging	48
Changelog	49

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction



The Taoglas Synergy MA1506 is a 6-in-1 next-generation permanent mount antenna designed for vehicle roof applications. It has a fully IP67 rated waterproof robust PC enclosure and base. The 6 antennas inside support 5G/4G, GPS/GLONASS/BeiDou, Wi-Fi (2.4GHz/5GHz). This outstanding patent-pending antenna delivers powerful MIMO antenna technology for 5G/4G, Wi-Fi 2.4/5.8GHz 802.11n and the emerging 802.11ac, and an optimized GPS/GLONASS/BeiDou patch antenna for location. The 5G/4G antennas also include backward compatibility to work at most worldwide 2G and 3G bands.

### Typical Applications:

- Next Generation OEM Automotive Connectivity
- Multimedia, Navigation and Telematics Systems
- V2V, V2X and Fleet Management Applications
- Real-time HD Video Streaming
- First Net Responder Routers

The MA1506 is ideal for applications that require highly sophisticated antennas for real-time streaming applications that demand high-speed video uplink and downlink into the cabin of the vehicle. These challenges are resolved by the highly efficient, high gain MIMO antennas, with high isolation, all of which is necessary to achieve the required signal to noise ratio and throughput.

The MA1506 can also be customized for your particular wireless application and frequency band, subject to NRE and MOQ. There are 5 x RG-316 cables, terminating in SMA(M) connectors for 5G/4G MIMO 2X2, and RP SMA(M) for Wi-Fi MIMO 3X3. There is an RG-174 cable for GNSS terminating in an SMA(M) connector.

All cable lengths and connector types are fully customizable. The Synergy MA1506 can be supplied with low loss TGC-200 cable extensions for longer cable runs. Contact your regional Taoglas customer support team for more information.

## 2. Specifications

GNSS Frequency Bands Covered							
GPS/QZSS	L1 1575.42MHz	L2 1227.6MHz	L5 1176.45MHz	L6 1278.75MHz			
	■	□	□	□			
GLONASS	L5R 1176.45MHz	L3PT 1201.5MHz	L2PT 1246MHz	L1CR 1575.42MHz	L1PT 1602MHz		
	□	□	□	■	■		
Galileo	E5a 1176.45MHz	E5b 1201.5MHz	E4 1215MHz	E3 1256MHz	E6 1278.75MHz	E2 1561MHz	L1 1575.42MHz
	□	□	□	□	□	■	■
BeiDou	B1 1561MHz	B2 1207.14MHz	B3 1268.52MHz				
	■	□	□				
Compass	E5B(B2)/ E6(B3) 1268.56MHz	E2(B1) 1561MHz					
	□	■					
SBAS	Omnistar 1542.5MHz	WAAS/EGN OS 1575.42MHz					
	□	■					

GNSS Electrical			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.5	2.5	2.5
Passive Antenna Efficiency (%) (Without cable loss)	40.02	48.39	44.29
Passive Antenna Gain at Zenith (dBic) (Without cable loss)	3.75	4.44	4.54
Axial Ratio (dB)	20	11	15
Polarization	RHCP		
Impedance	50Ω		
Cable	RG-174		
Connector	SMA(M)		

<b>LNA and Filter Electrical Properties</b>			
<b>Frequency (MHz)</b>	<b>1561</b>	<b>1575.42</b>	<b>1602</b>
VSWR (max.)	2.0:1	2.0:1	2.0:1
Gain@1.8V (dBic)	28.8 dB	28.8 dB	28 dB
Gain@3.0V (dBic)	29 dB	29 dB	28.3 dB
Gain@5.5V (dBic)	29.6 dB	29.4 dB	28.7 dB
Noise@1.8V (dB)	2.8 dB	2.3 dB	2.8 dB
Noise@3.0V (dB)	2.8 dB	2.2 dB	2.8 dB
Noise@5.5V (dB)	2.9 dB	2.3 dB	2.8 dB
Power consumption@1.8V (mA)	8.7 mA		
Power consumption@3.0V (mA)	9.0 mA		
Power consumption@5.5V (mA)	11 mA		
<b>Total Specification (Through Antenna, SAW Filter and LNA)</b>			
<b>Frequency (MHz)</b>	<b>1561</b>	<b>1575.42</b>	<b>1602</b>
Gain@3V (dBic)	31.7 ± 3	32.4 ± 3	32.4 ± 3
Output Impedance	50Ω		

5G/4G Antenna											
Frequency (MHz)		5G NR Band 71	LTE700	GSM 850/900	5G NR Band	DCS	PCS	UMTS1	LTE2600	5G NR Band 77, 78, 79	LTE5200/Wi-Fi 5800
		617 ~698	698 ~824	824 ~960	1427 ~1518	1710 ~1880	1850 ~1990	1920 ~2170	2300 ~2690	3300 ~3800	5150 ~5925
Efficiency (%)											
MIMO 1	5m	30.79	30.39	34.96	39.48	46.48	32.68	32.15	43.45	49.25	49.39
MIMO 2	5m	18.62	31.96	30.24	43.80	42.07	37.06	38.94	44.95	31.36	44.49
Average Gain (dB)											
MIMO 1	5m	-5.12	-5.17	-4.56	-4.04	-3.33	-4.86	-4.93	-3.62	-3.08	-3.06
MIMO 2	5m	-7.30	-4.95	-5.19	-3.59	-3.76	-4.31	-4.10	-3.47	-5.04	-3.52
Peak Gain (dBi)											
MIMO 1	5m	-0.08	1.04	2.03	2.94	4.55	2.93	3.20	4.96	5.82	5.90
MIMO 2	5m	-0.58	0.49	1.42	3.76	3.31	2.32	3.75	4.84	3.77	5.89
Impedance		50 Ω									
Polarization		Linear									
Radiation Pattern		Omni									
Max. input power		2W									

Wi-Fi MIMO				
Frequency (MHz)		2400~2500		5150~5850
<b>Efficiency (%)</b>				
MIMO 1	5m		47.59	47.92
MIMO 2	5m		32.75	39.08
MIMO 3	5m		47.06	46.93
<b>Average Gain (dB)</b>				
MIMO 1	5m		-3.22	-3.19
MIMO 2	5m		-4.85	-4.08
MIMO 3	5m		-3.27	-3.29
<b>Peak Gain (dBi)</b>				
MIMO 1	5m	Free Space	-0.21	-2.25
		Ground Plane 86*86cm	1.92	4.21
		Ground Plane 30*30cm	1.40	2.33
MIMO 2	5m	Free Space	-0.17	-1.08
		Ground Plane 86*86cm	3.61	1.32
		Ground Plane 30*30cm	1.37	2.55
MIMO 3	5m	Free Space	-0.51	-0.58
		Ground Plane 86*86cm	2.29	0
		Ground Plane 30*30cm	1.65	1.14
<b>Impedance</b>		50 Ω		
<b>Polarization</b>		Linear		
<b>Radiation Pattern</b>		Omni		
<b>Max. input power</b>		2W		

Mechanical	
Height	57.47mm
Planner Dimension	Ø160mm
Casing	PC
Cable	0.3m RG-174 with 4.7m TGC-200 for 5G/4G – Fully Customizable 0.3m RG-174 with 4.7m TGC-200 for Wi-Fi – Fully Customizable 0.3m RG174 with 4.7m TGC-200 for GNSS – Fully Customizable
Connector	5G/4G: SMA-Plug – Fully Customizable Wi-Fi: RP-SMA-Plug – Fully Customizable GNSS: SMA-Plug – Fully Customizable
Thread Diameter	M22
Sealant	Rubber Stopper and O-Ring
Weight	2.1Kg
Environmental	
Ingress Protection	IP67
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH
Cable Pull	RG-174 4 Kg




5G/4G Bands			
Band Number	5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓
18	UL: 815 to 830	DL: 860 to 875 (LTE only)	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710-1780	DL: 2110-2200	✓
71		617 to 698	✓
74/75/76		1427 to 1518	✓
78		3300 to 3800	✓
79		4400 to 5000	✓

\* Covered Bands represent greater than 20% efficiency


\*\*Measured with 5m cable

### 3. Active Antenna Characteristics


#### 3.1 Block Diagram (Active antenna)

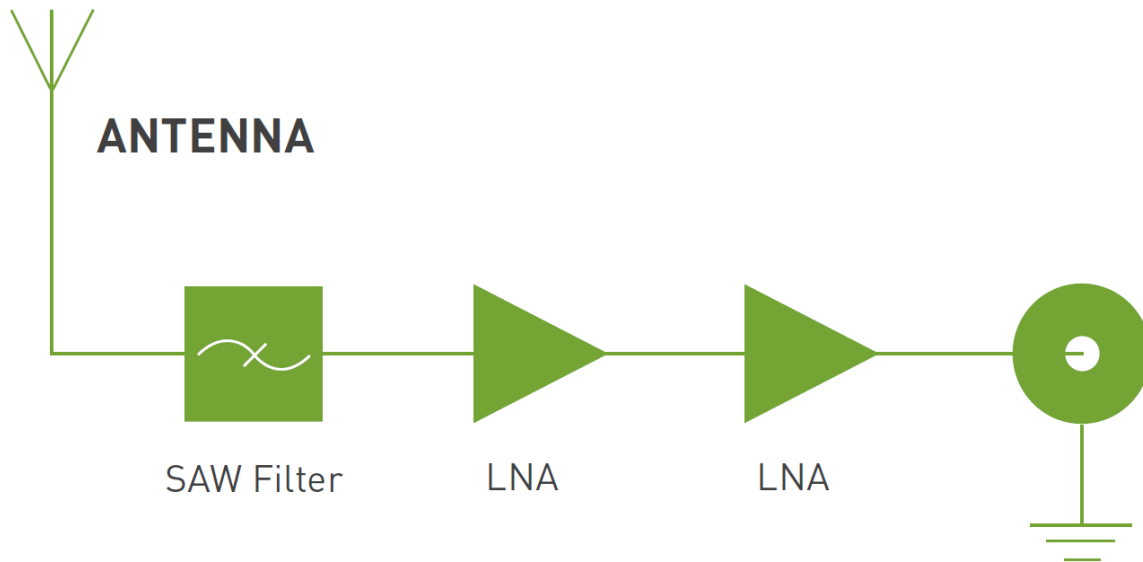


#### 3.2 Passive Antenna Return Loss

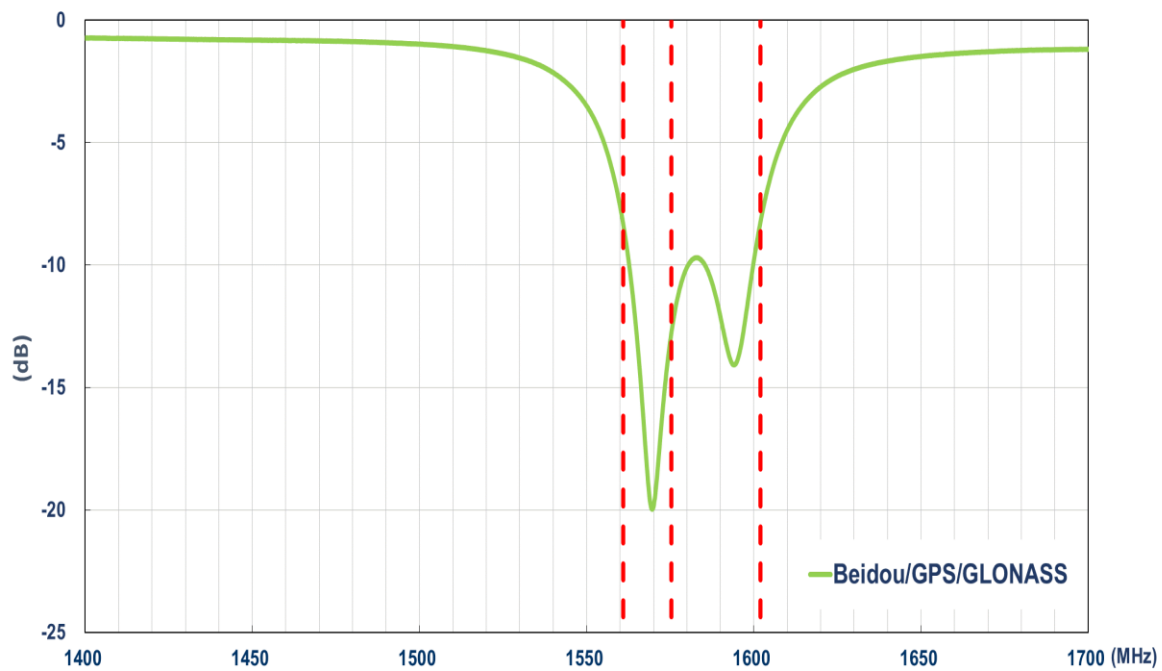


### 3.3 Passive Antenna Efficiency

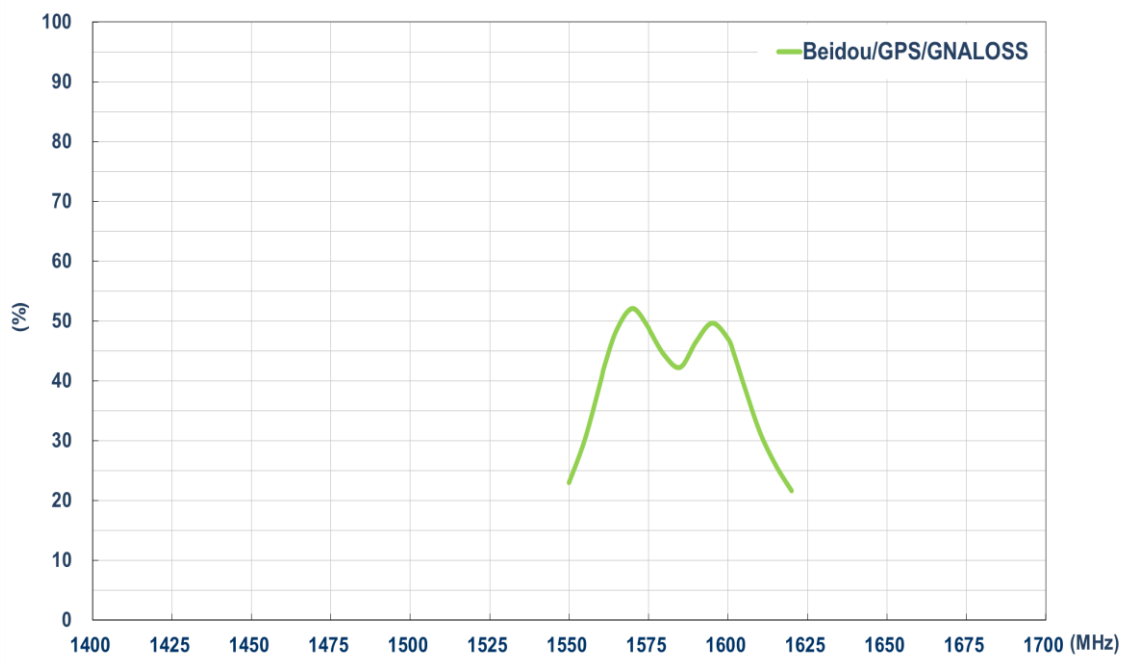

### 3.4 Passive Antenna Average Gain

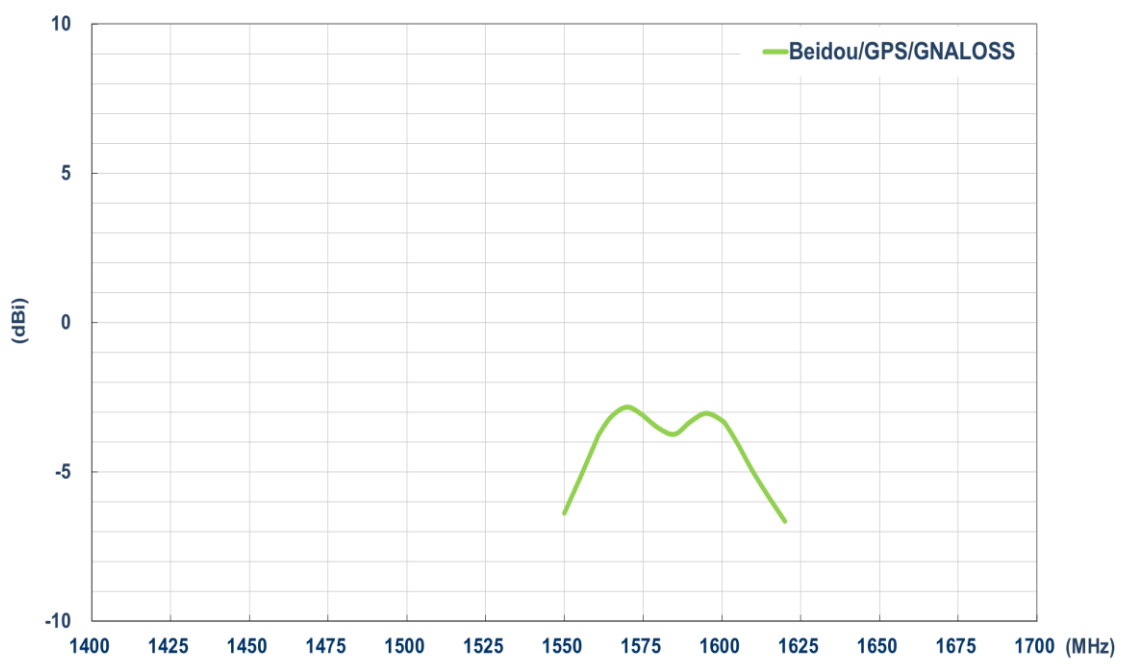


### 3.5 Passive Antenna Peak Gain

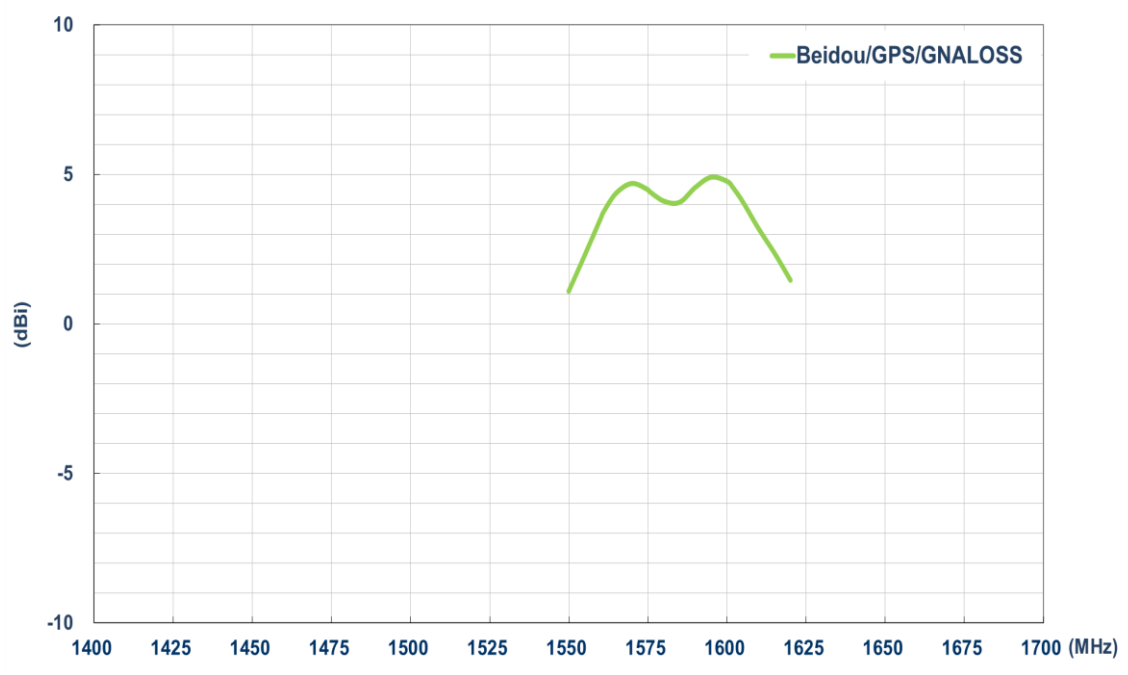


### 3.6 Passive Antenna Axial Ratio (Zenith is at 0°)

XZ-plane

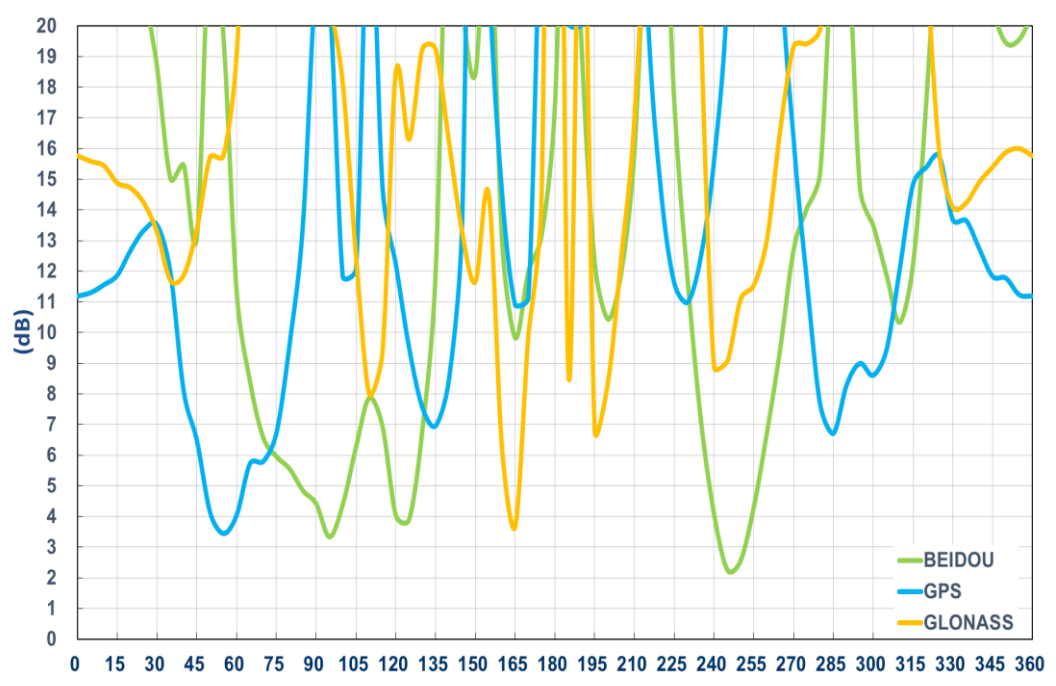


YZ-plane

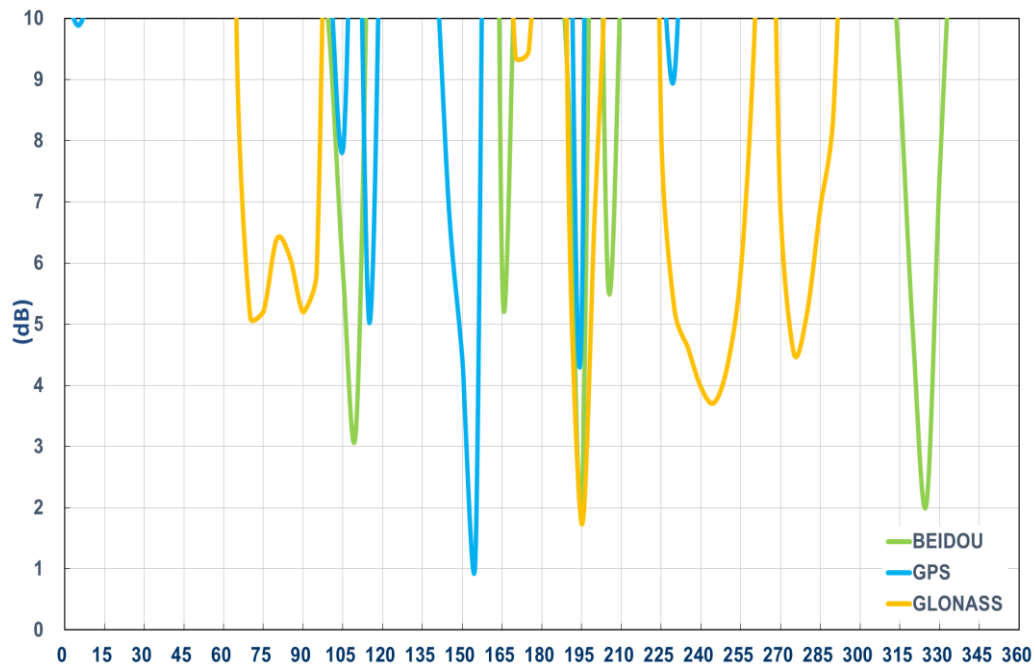


### 3.7 Active measurements

#### LNA Gain @ 3.0V


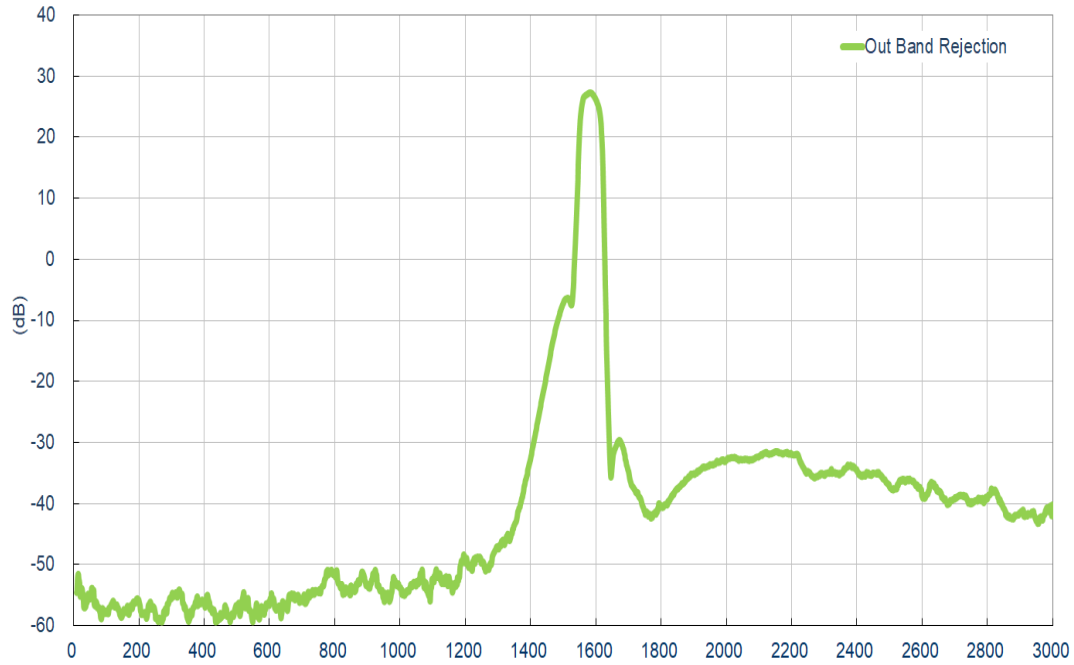


#### Noise Figure @ 3.0V

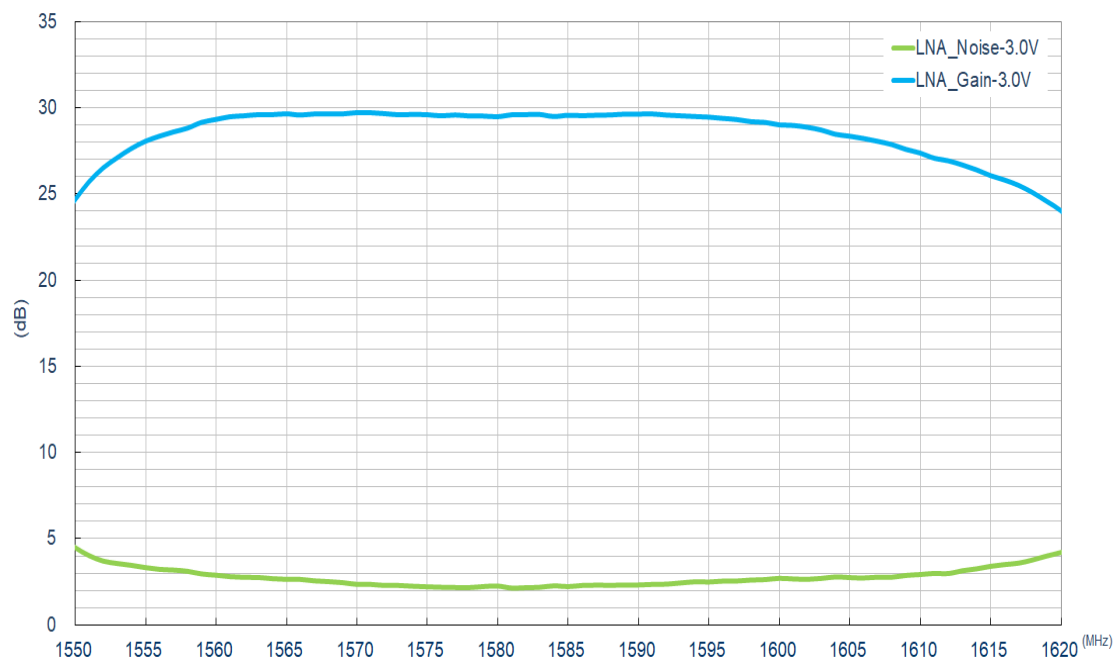

### 3.8 Passive Antenna Radiation Patterns


1575.42MHz

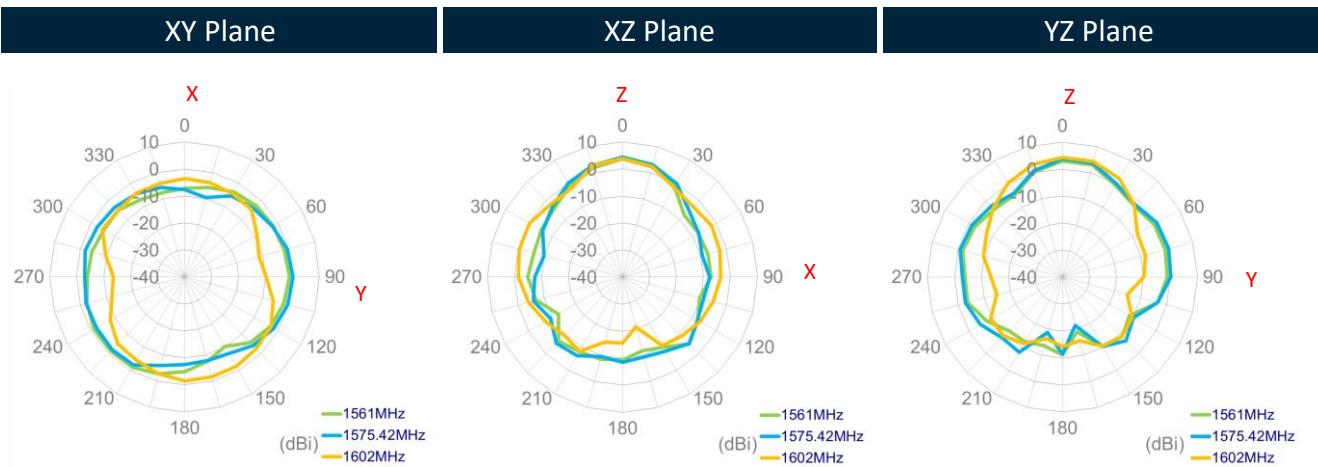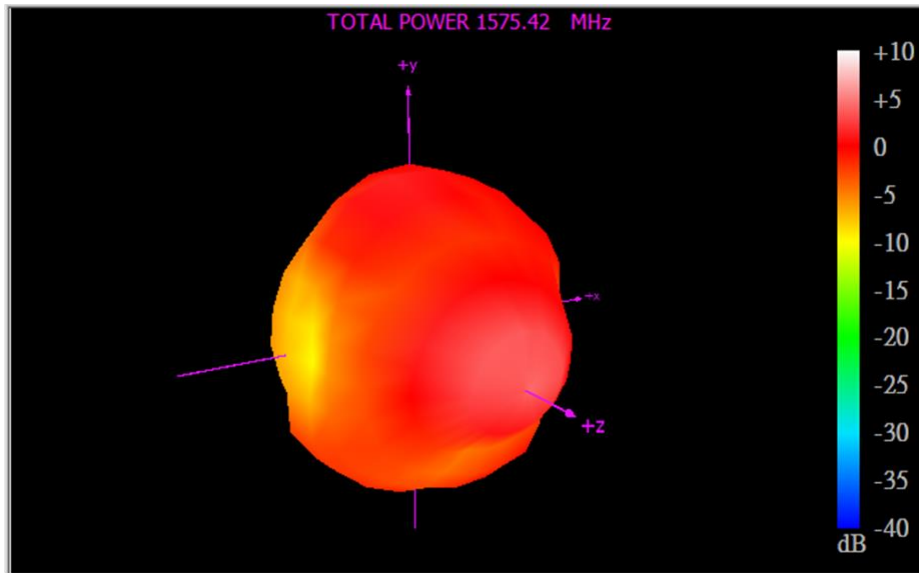


## 4. Antenna Characteristics

### 4.1 Return Loss

#### 5G/4G MIMO

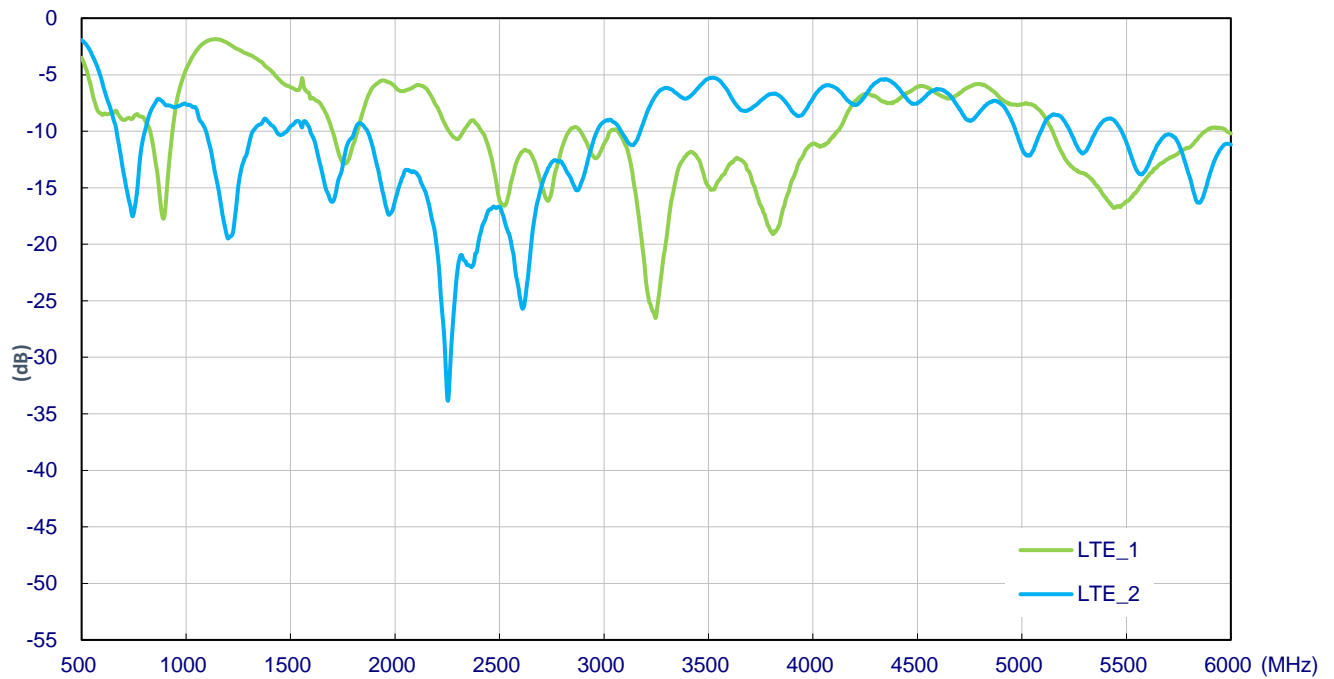


#### Wi-Fi MIMO

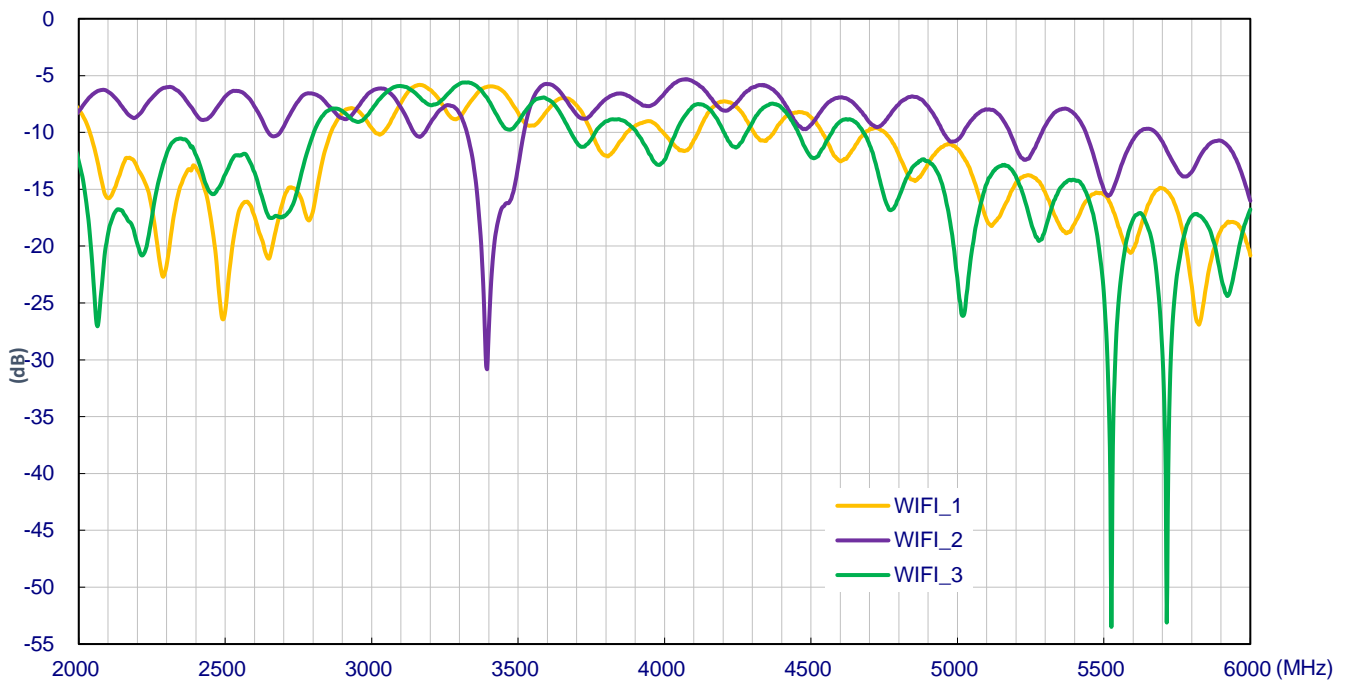




## 4.2 Efficiency

### 5G/4G MIMO

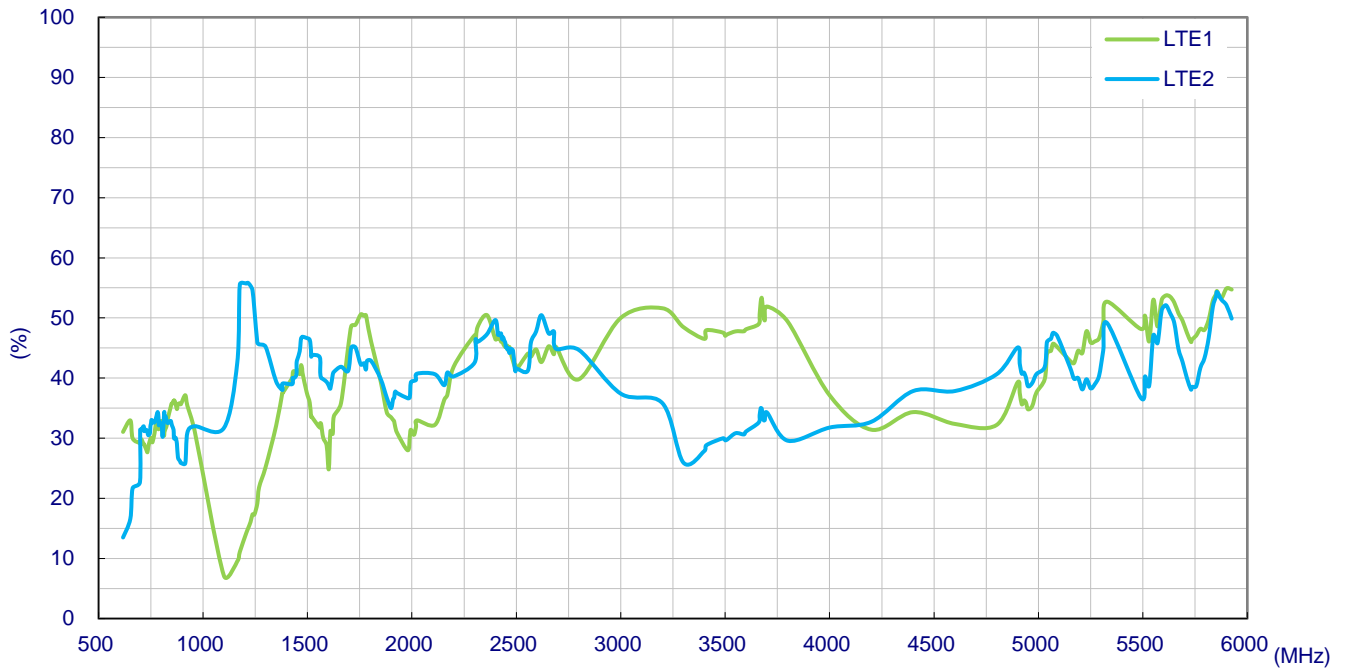


### Wi-Fi MIMO

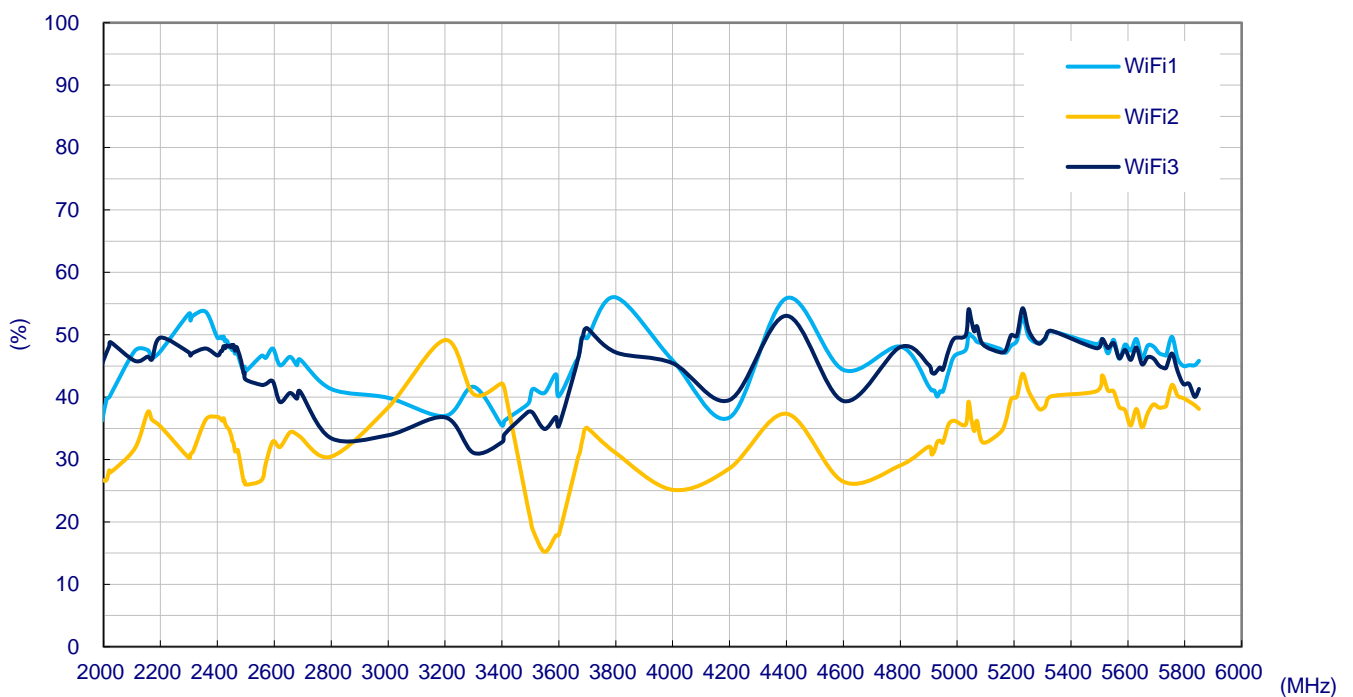


### 4.3 Average Gain

#### 5G/4G MIMO

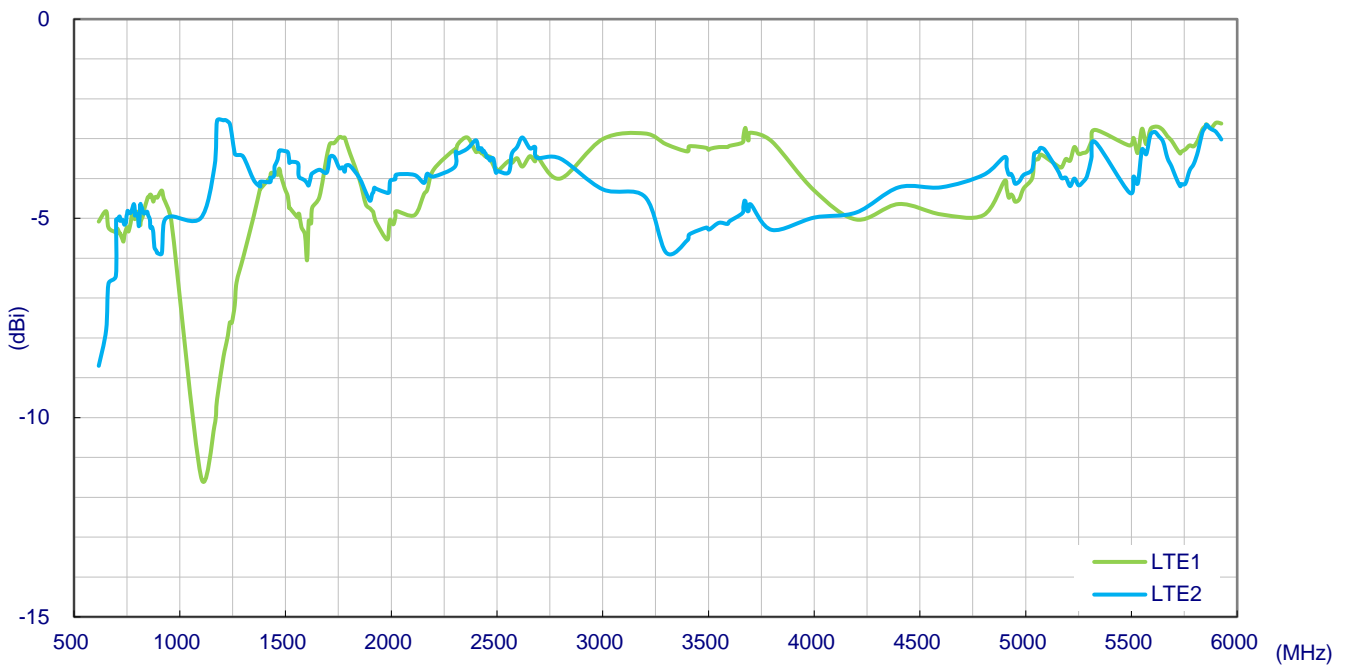


#### Wi-Fi MIMO

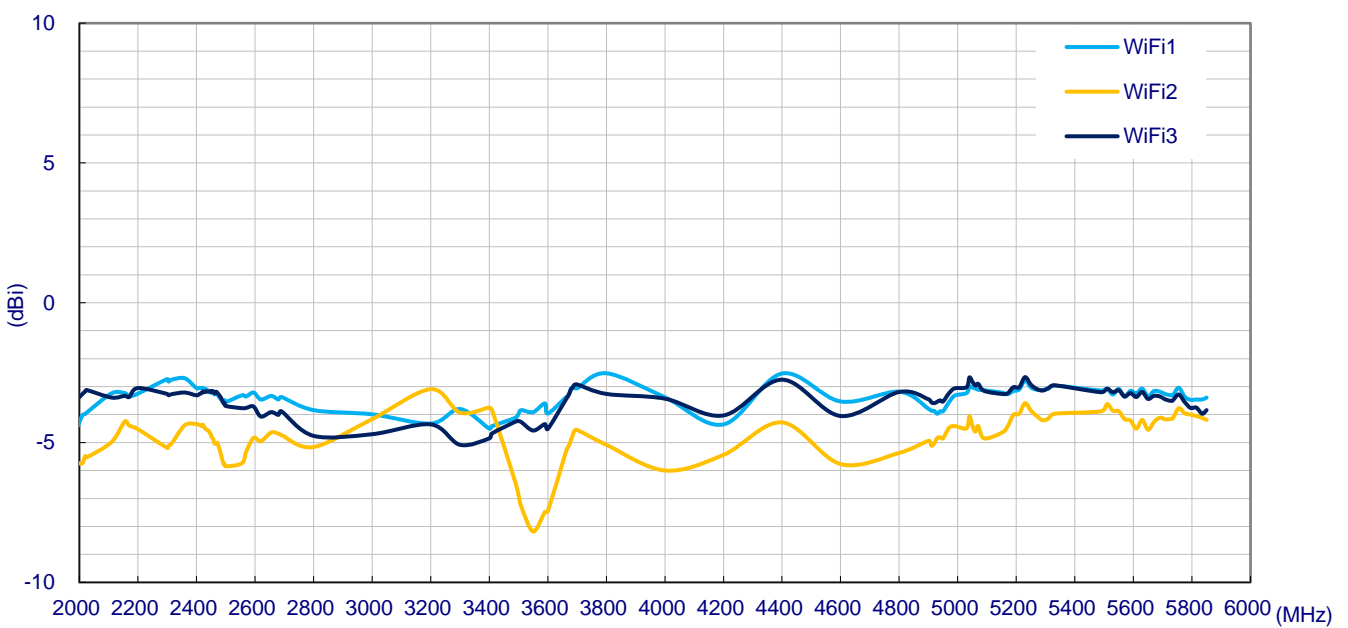


## 4.4 Peak Gain

### 5G/4G MIMO

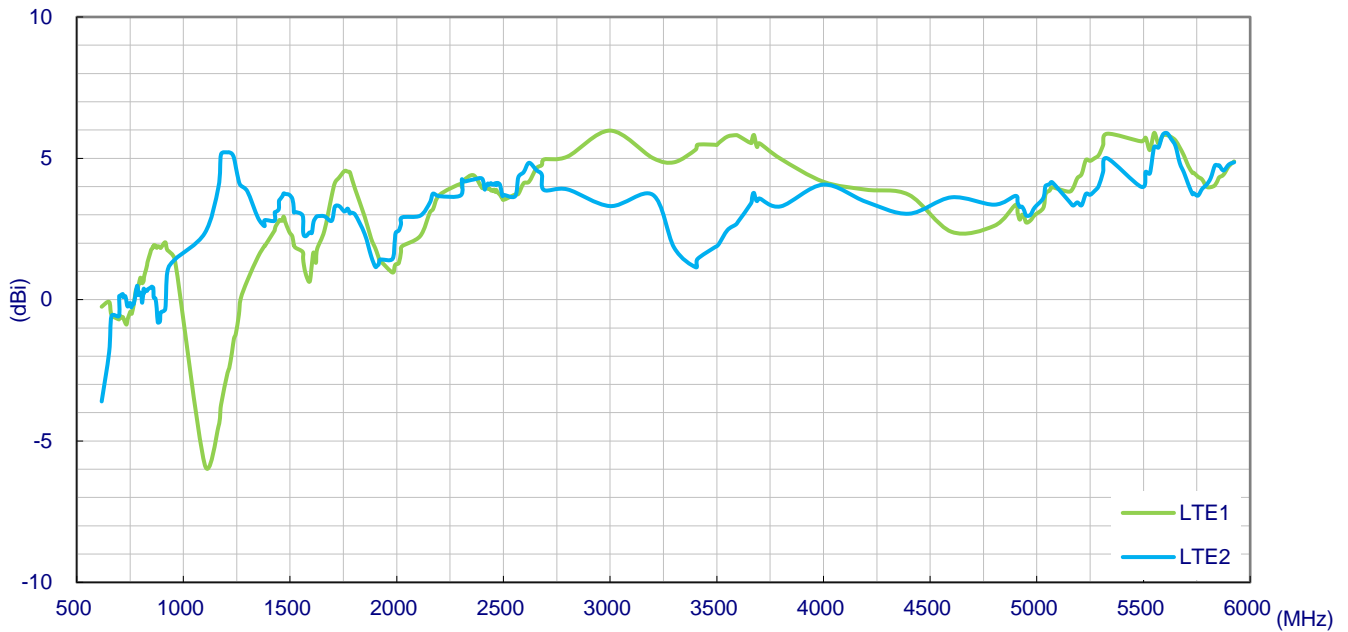


### Wi-Fi MIMO

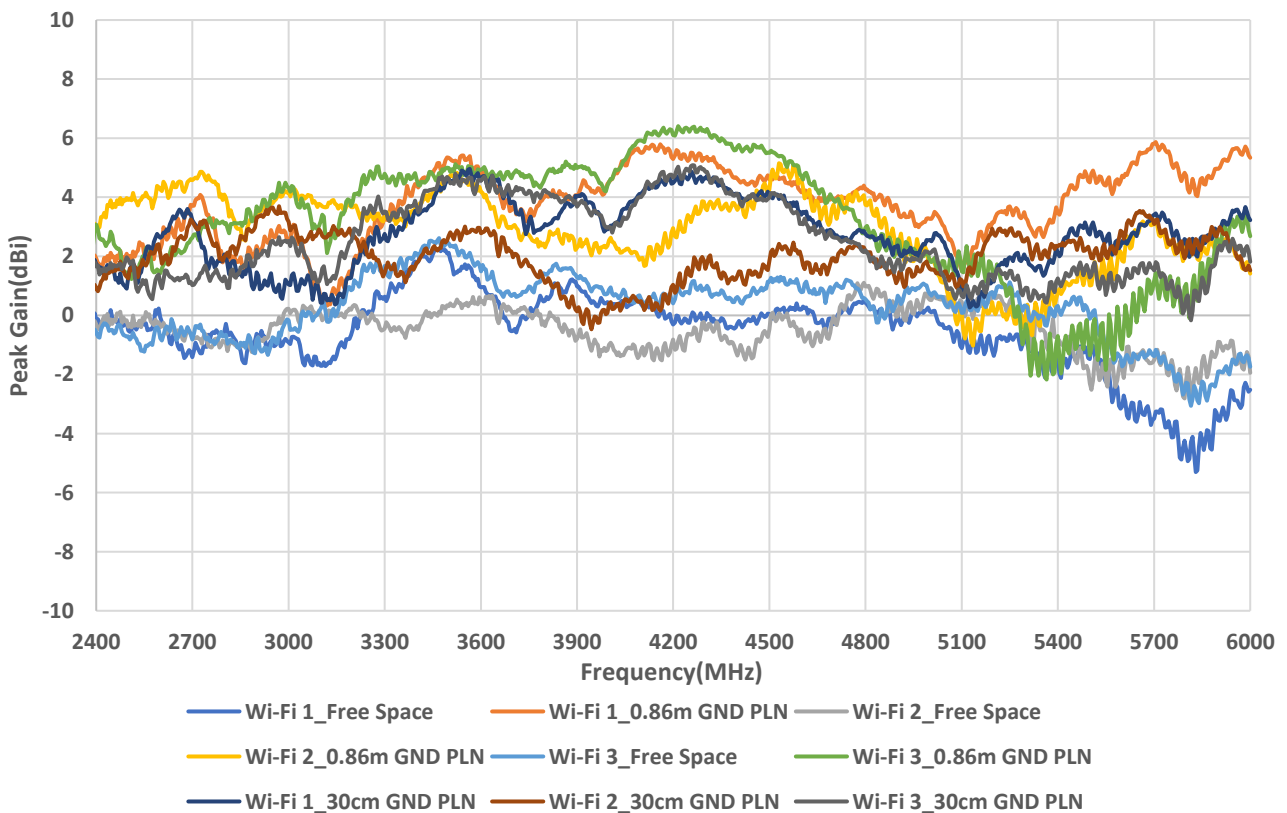

## 5. Radiation Patterns



### 5.1 Test Setup

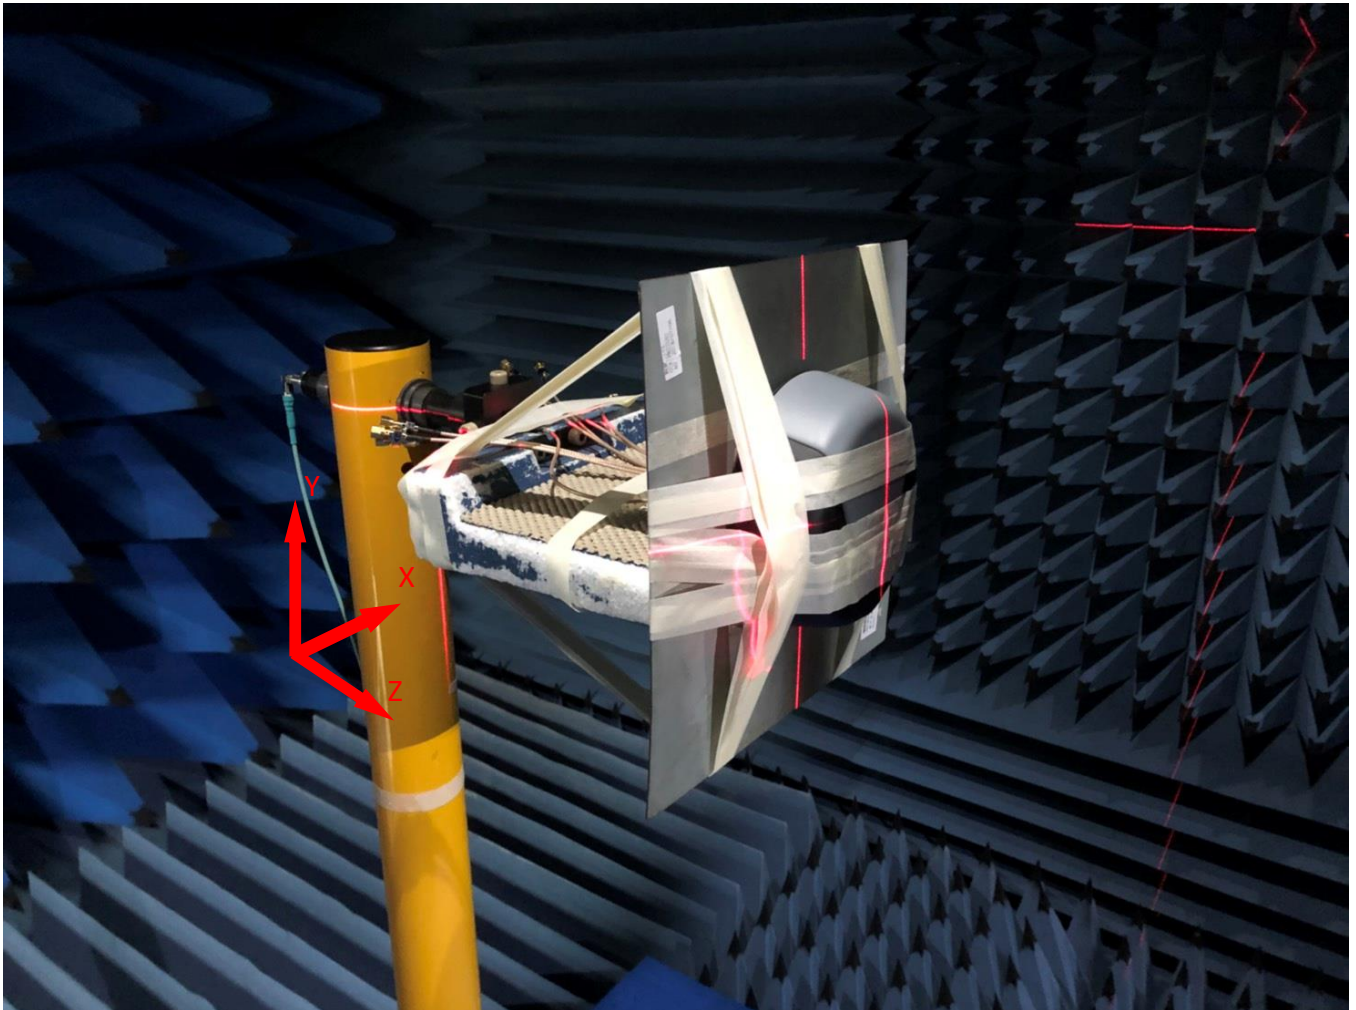



On 30x30cm Ground Plane

5.2 5G/4G MIMO 1 Radiation Pattern



663MHz

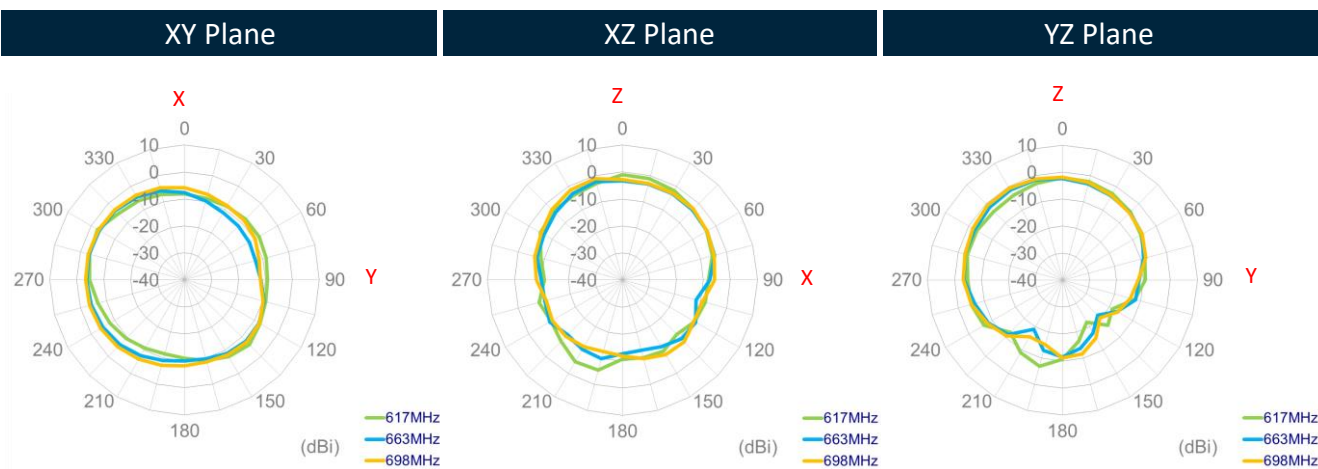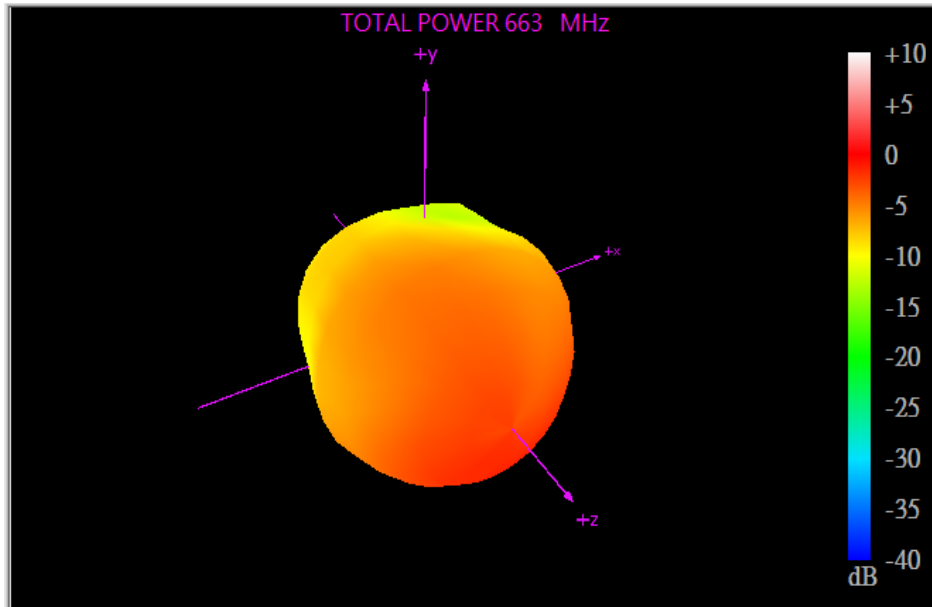



751MHz

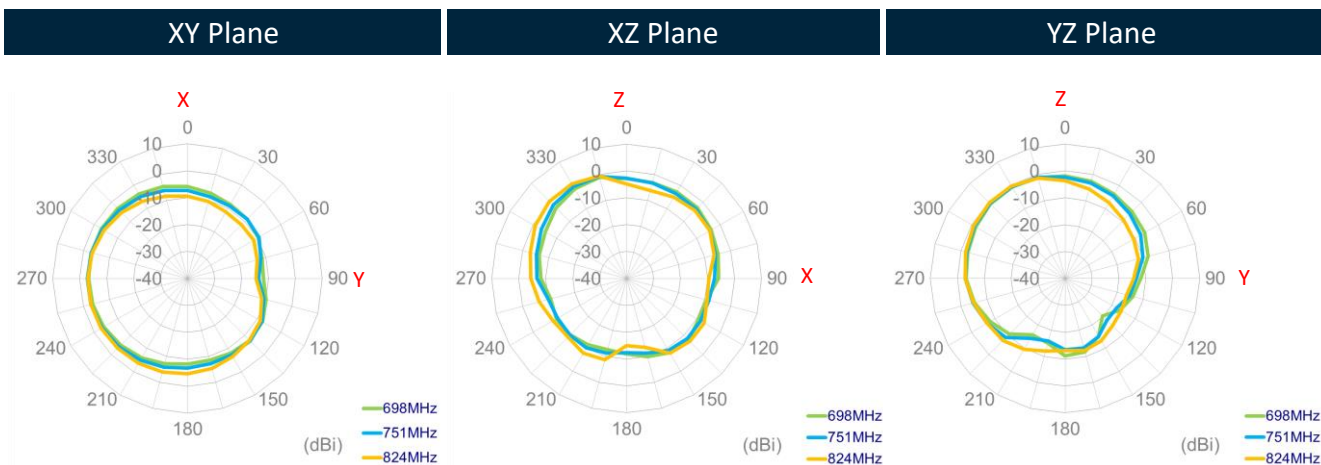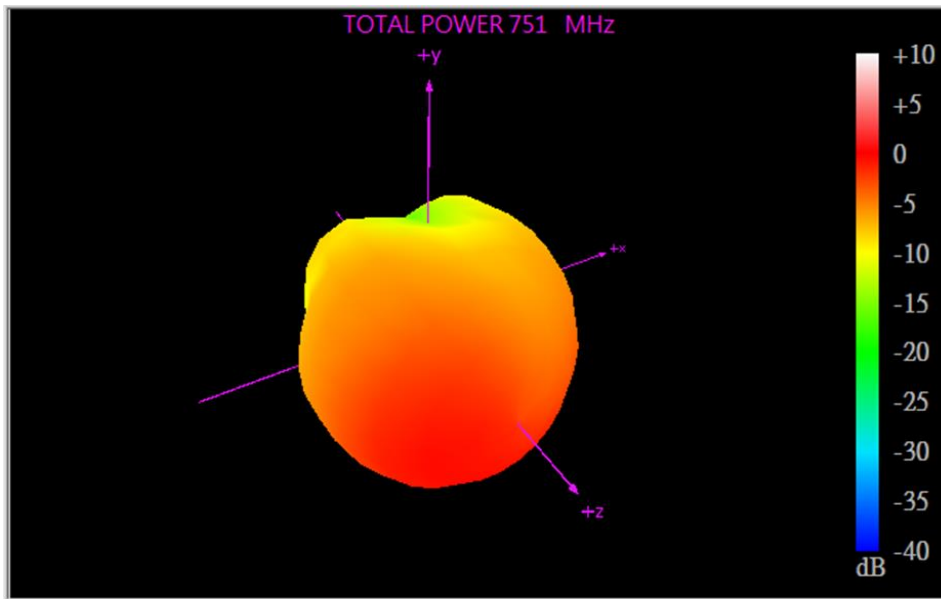

880MHz

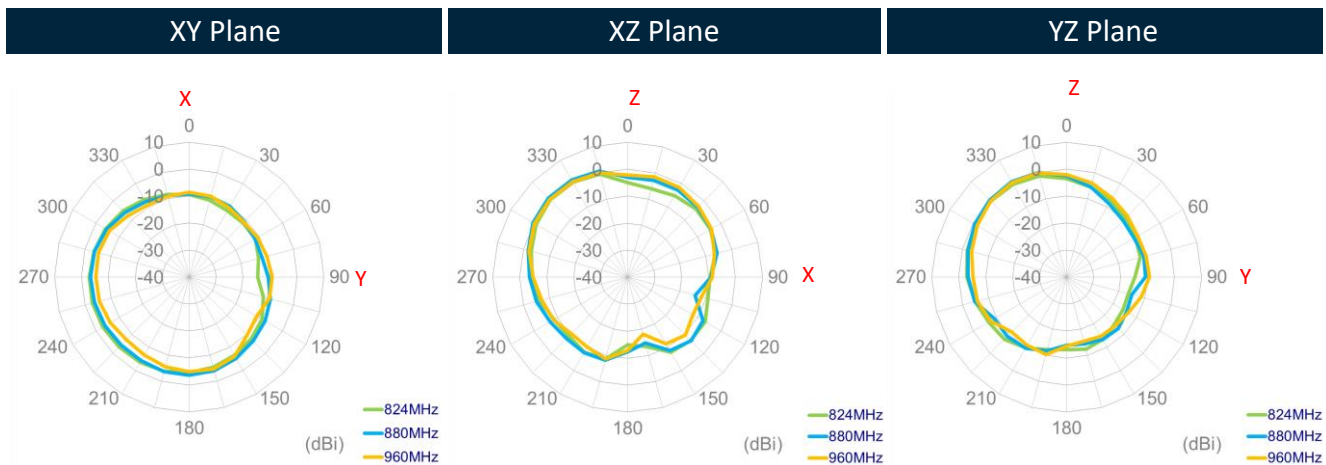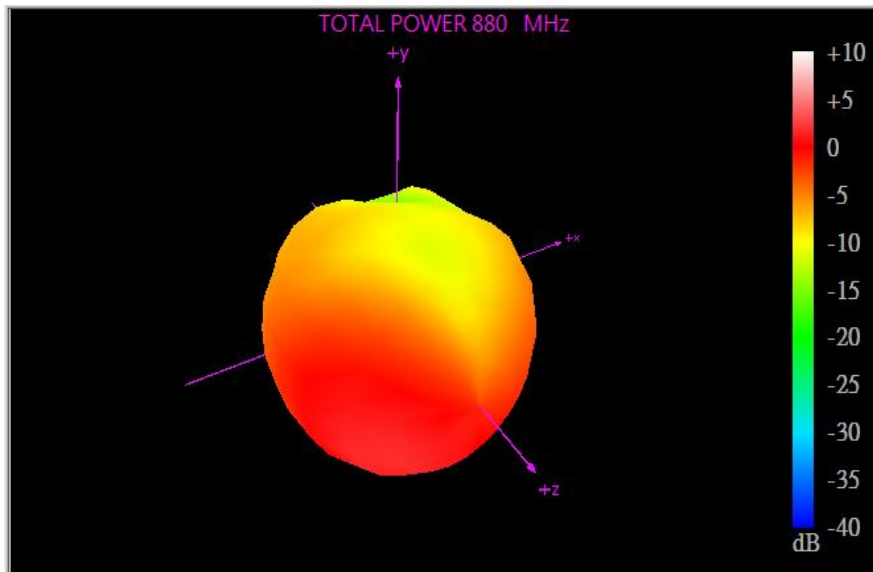


1467MHz

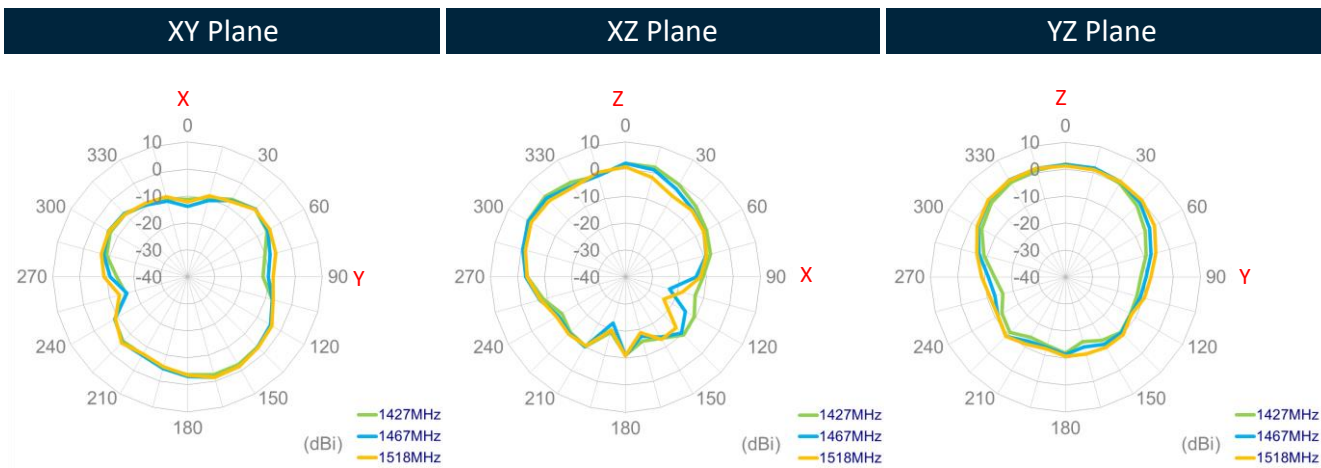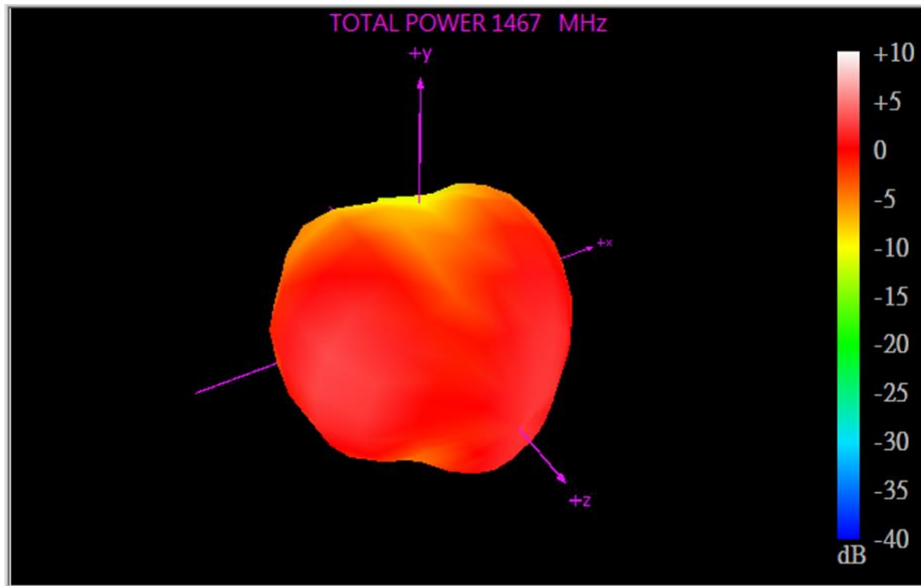






1805MHz

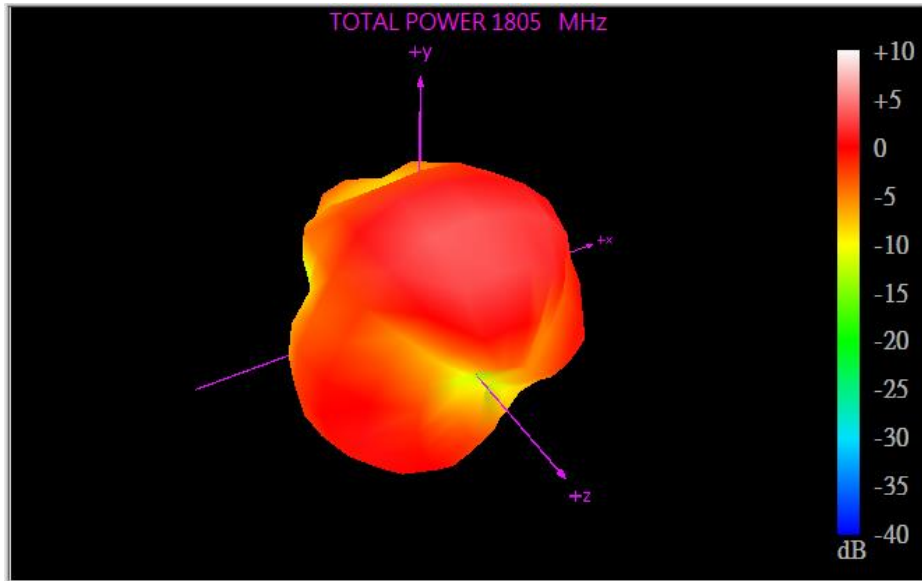



XY Plane      XZ Plane      YZ Plane

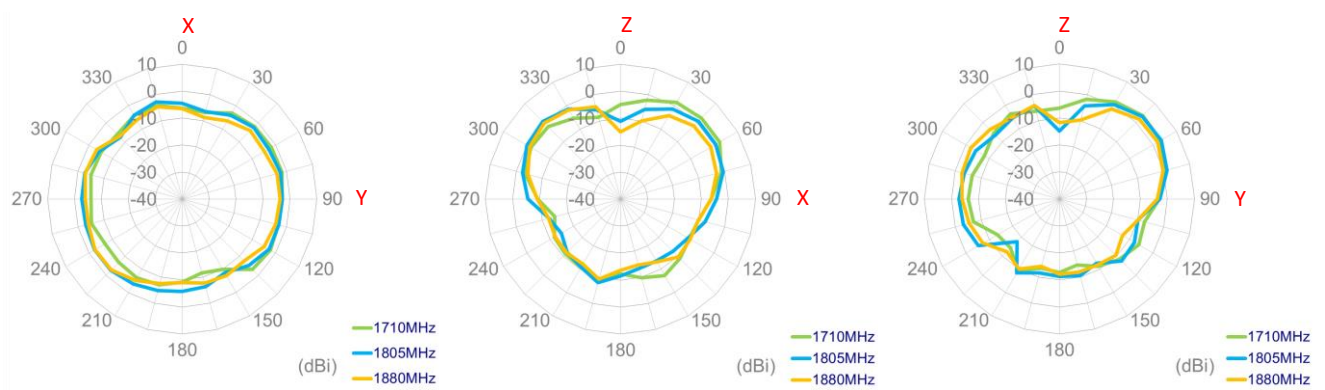



1920MHz

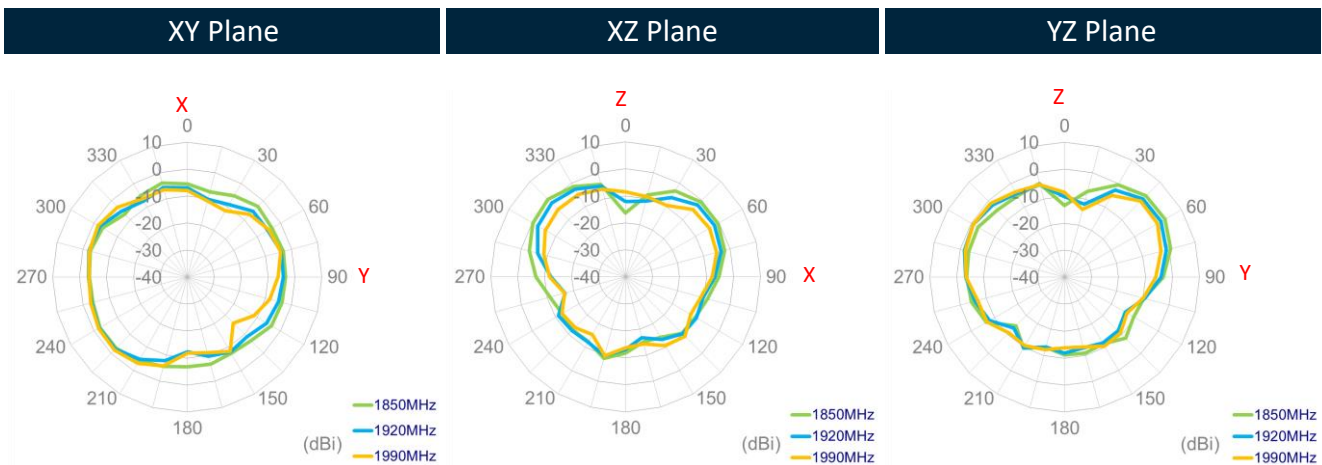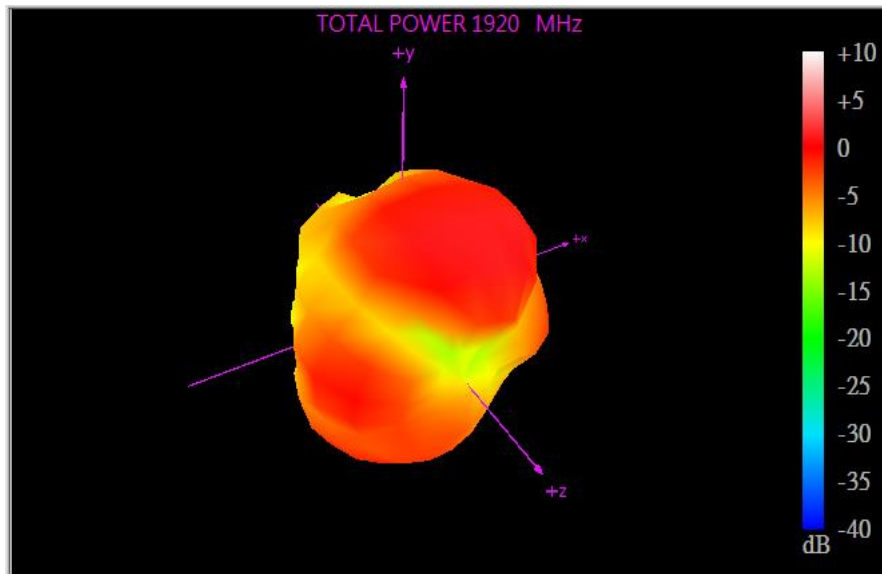


2010MHz

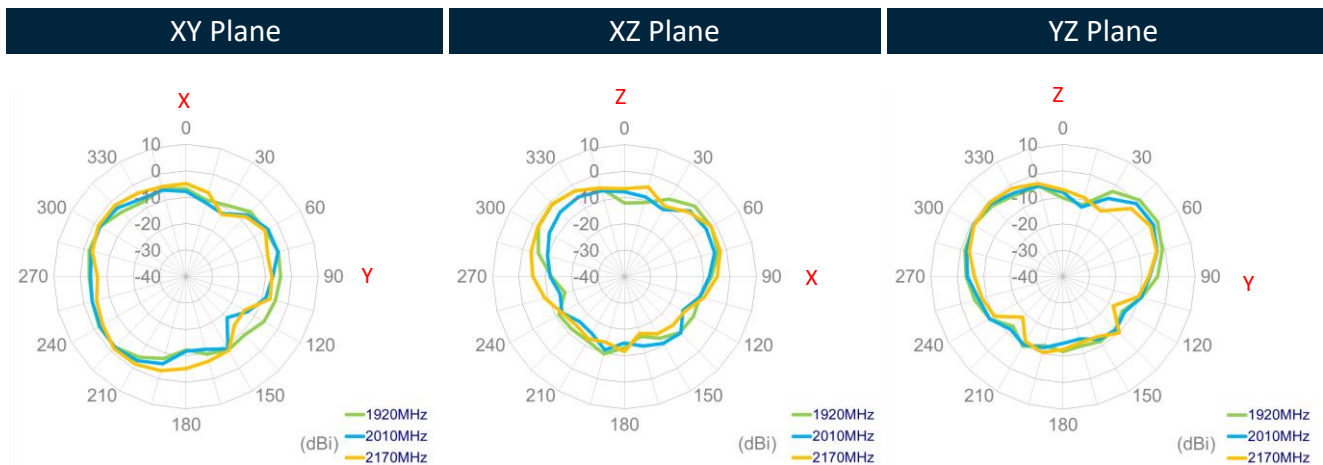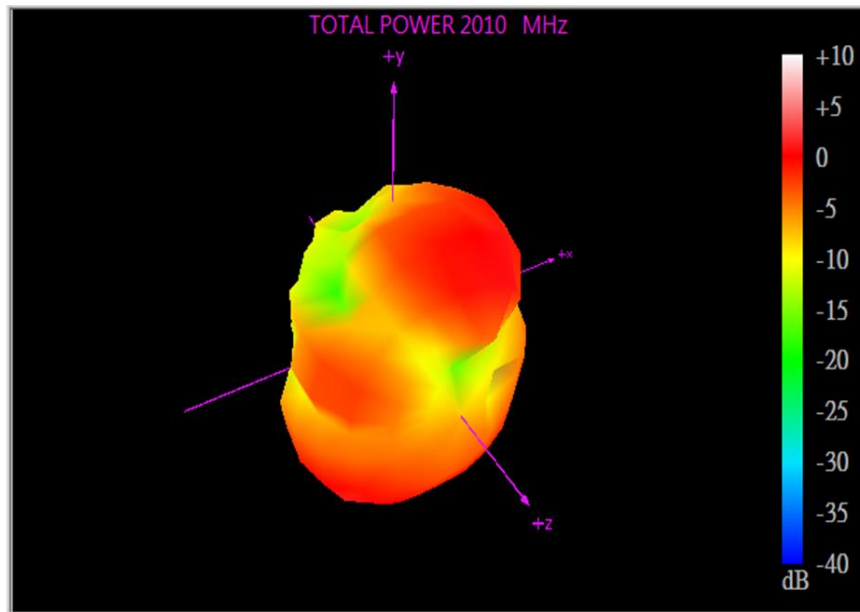




2500MHz

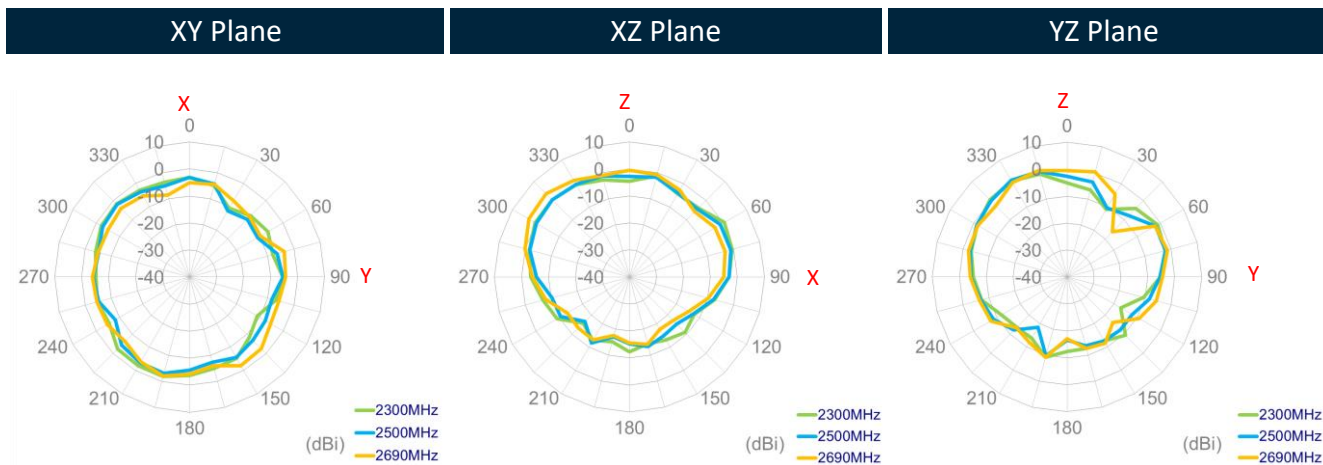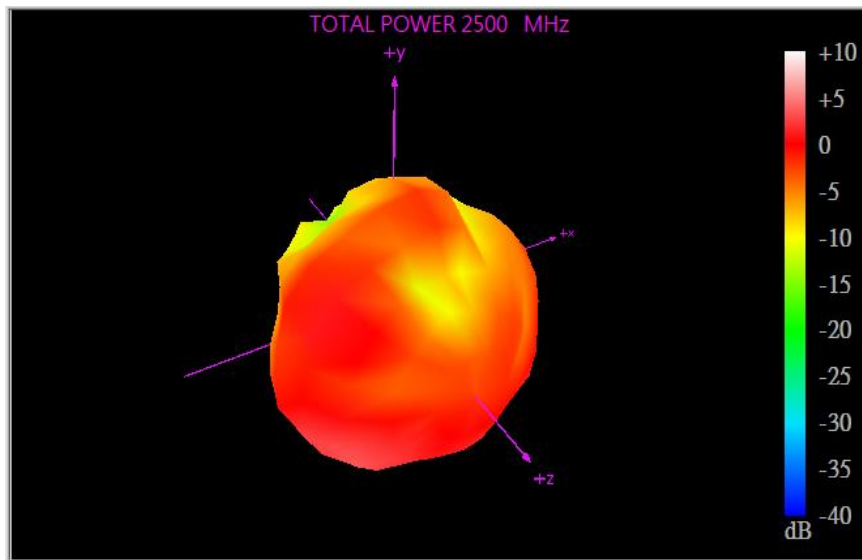


3300MHz

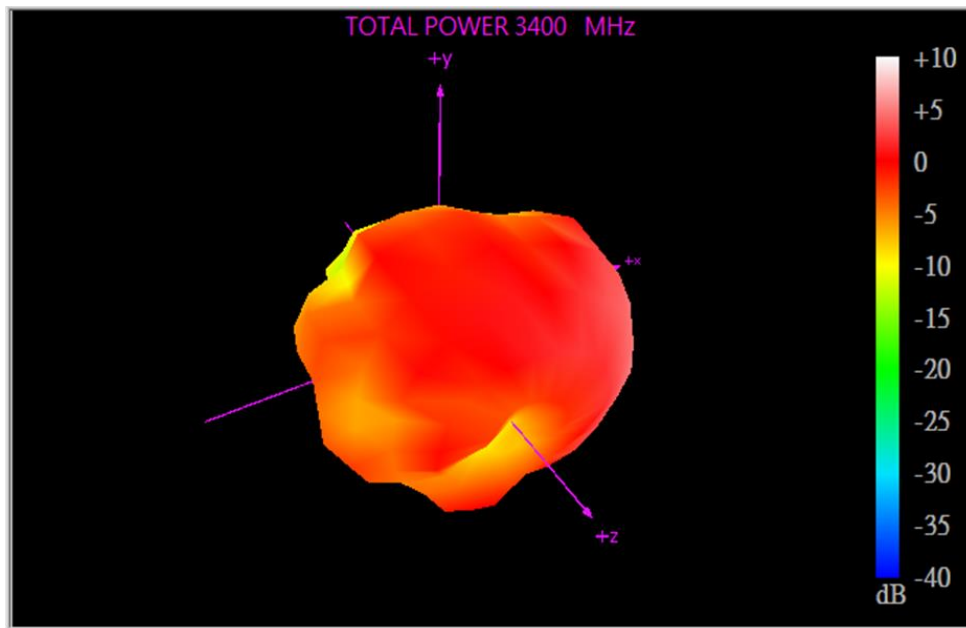




XY Plane      XZ Plane      YZ Plane

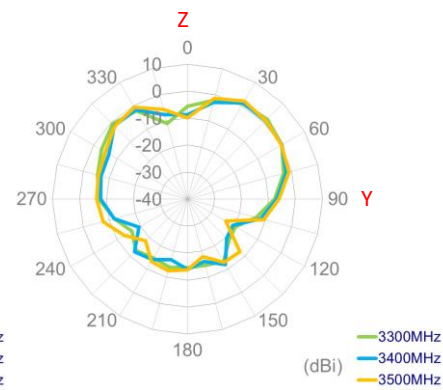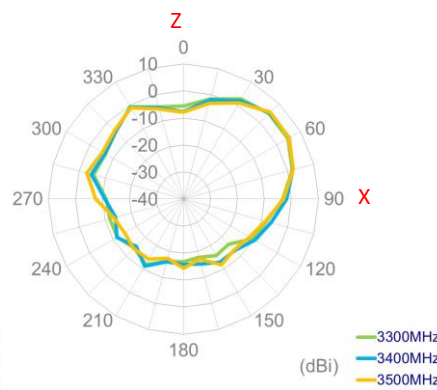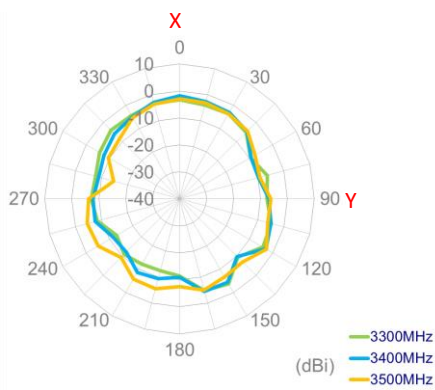

5550MHz

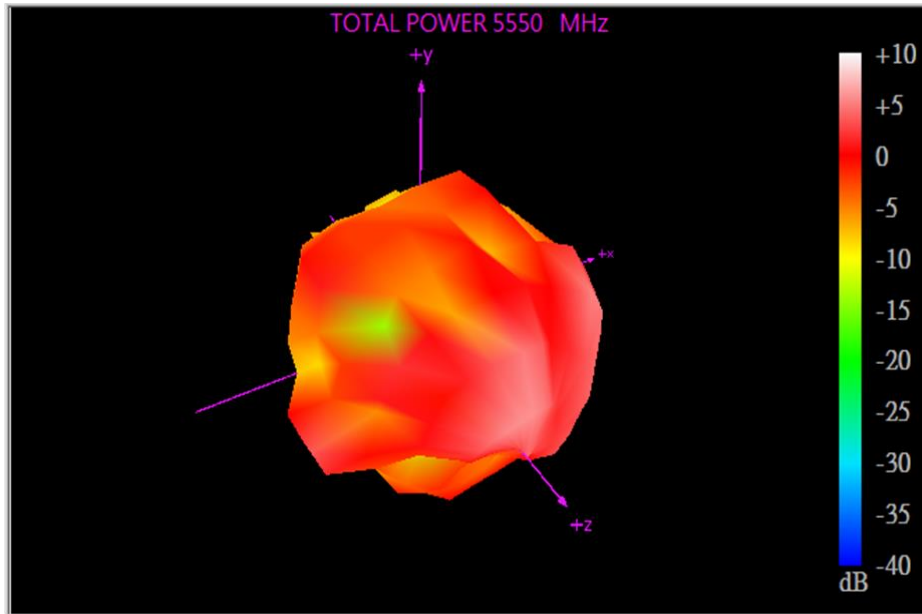


XY Plane      XZ Plane      YZ Plane

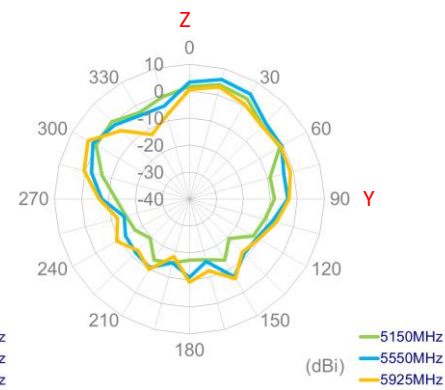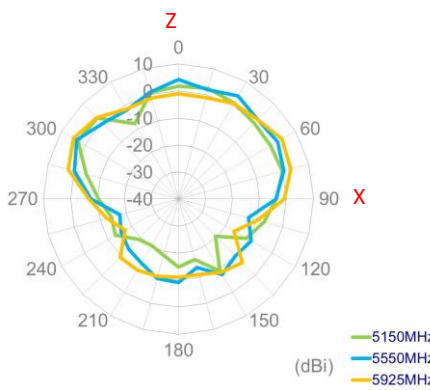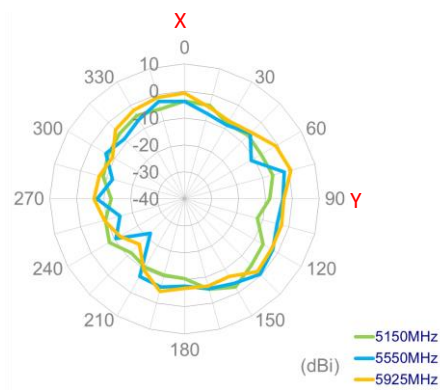


5.3 5G/4G MIMO 2 Radiation Pattern



663MHz

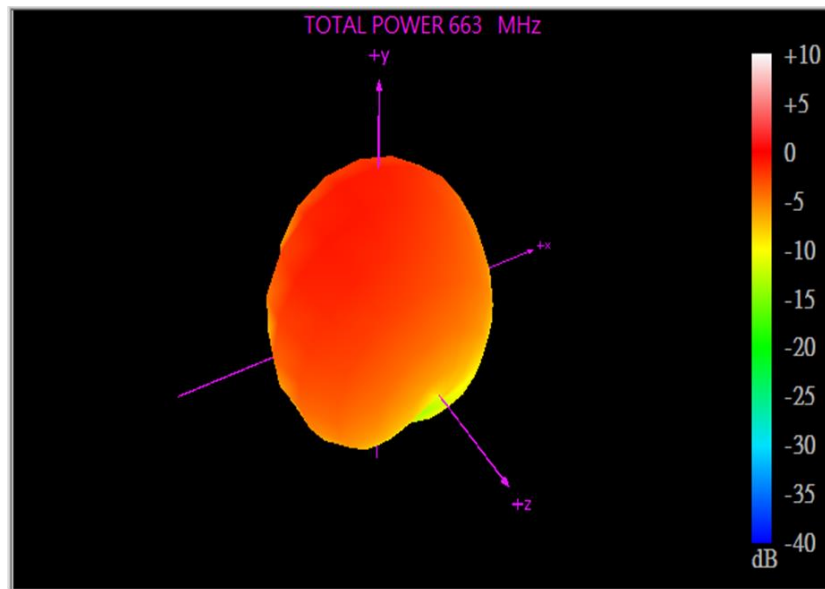

XY Plane      XZ Plane      YZ Plane

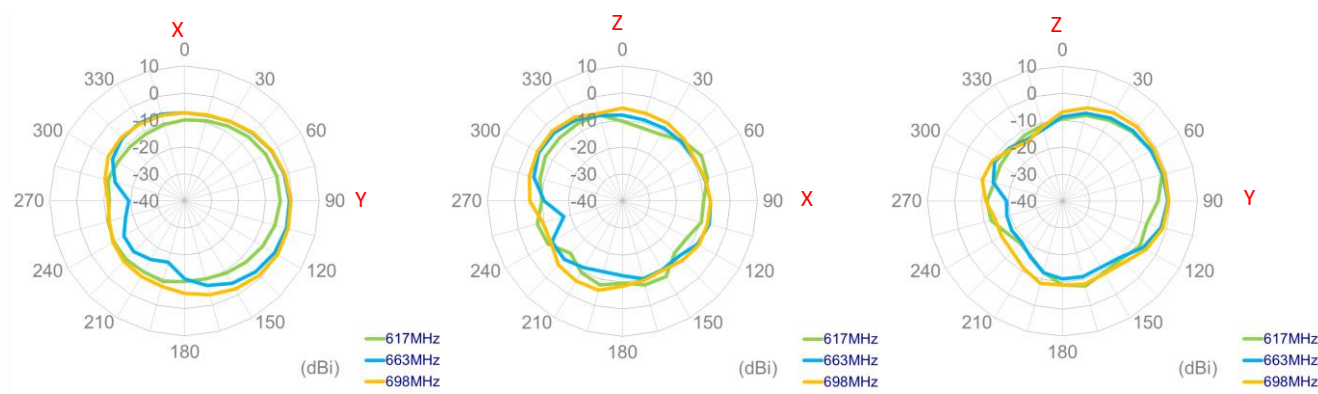


751MHz


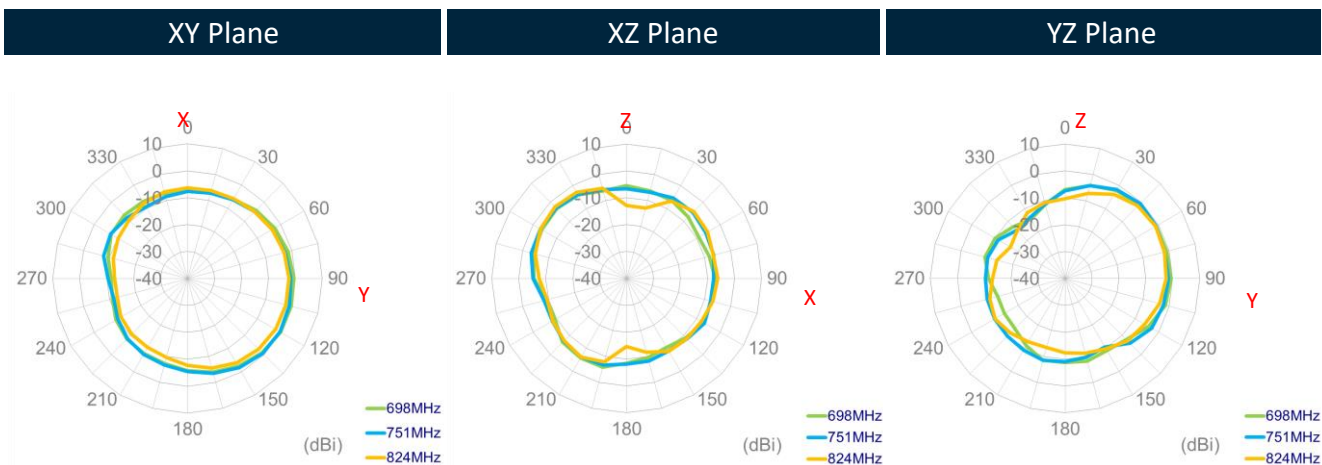
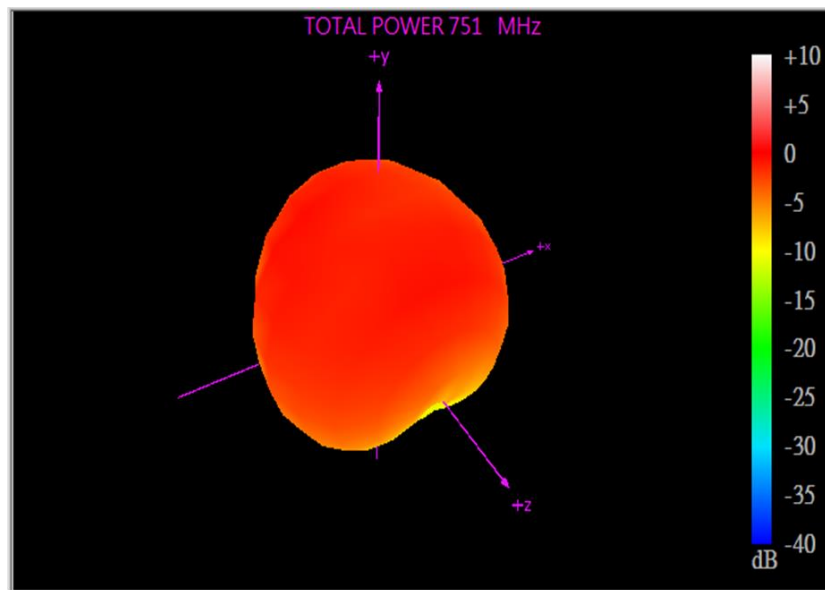






# 880MHz

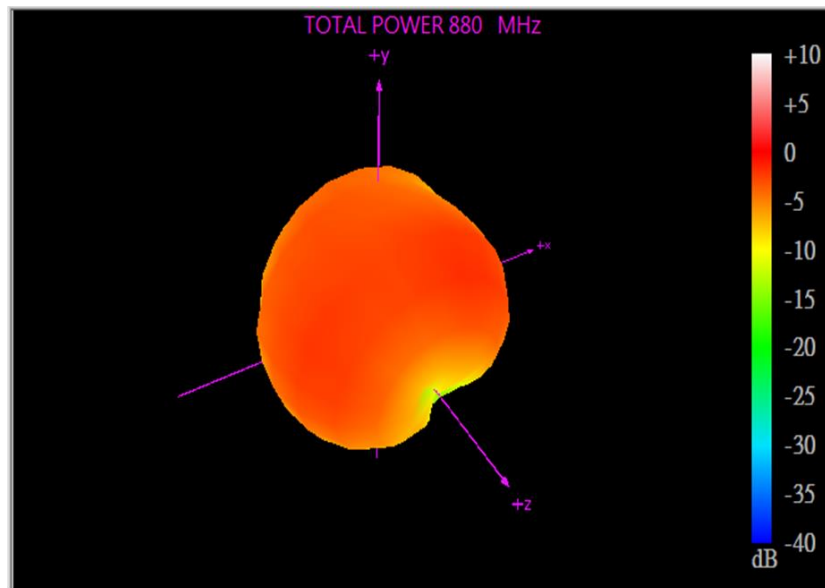


XY Plane	XZ Plane	YZ Plane
----------	----------	----------

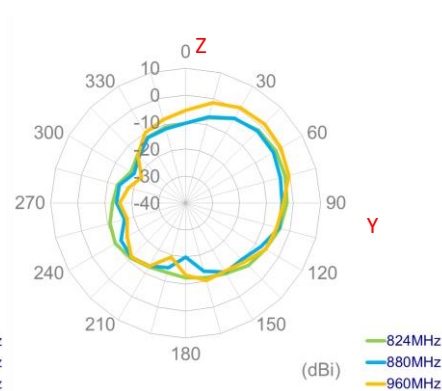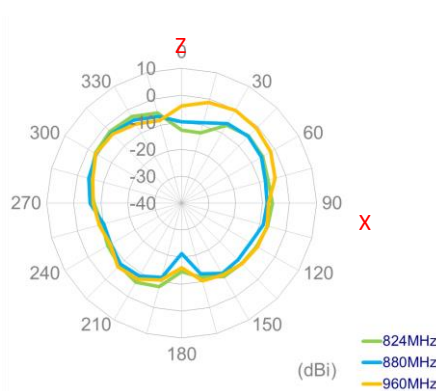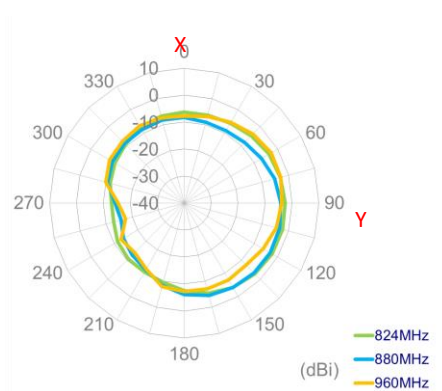


1467MHz

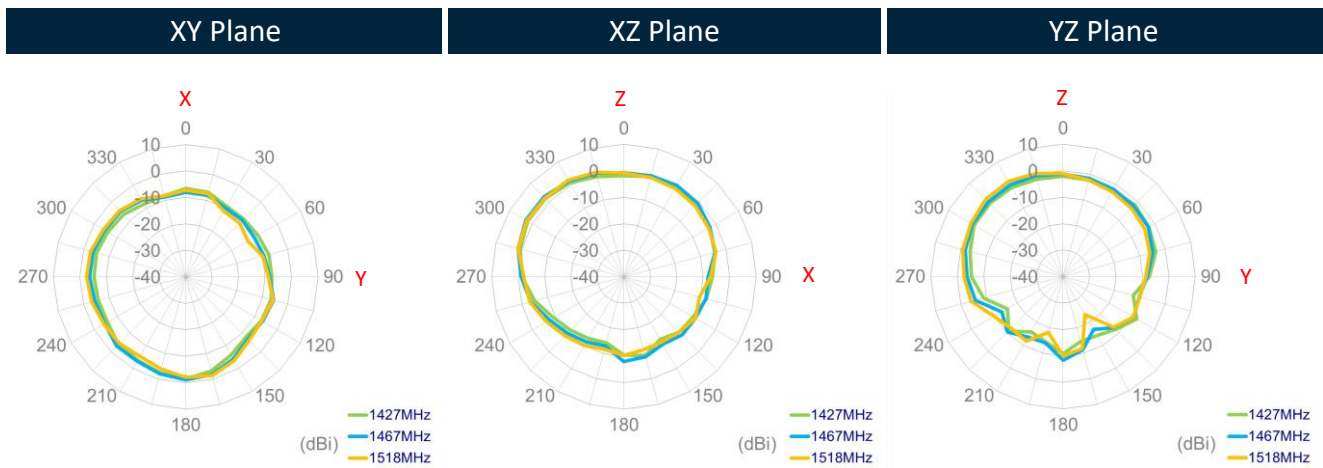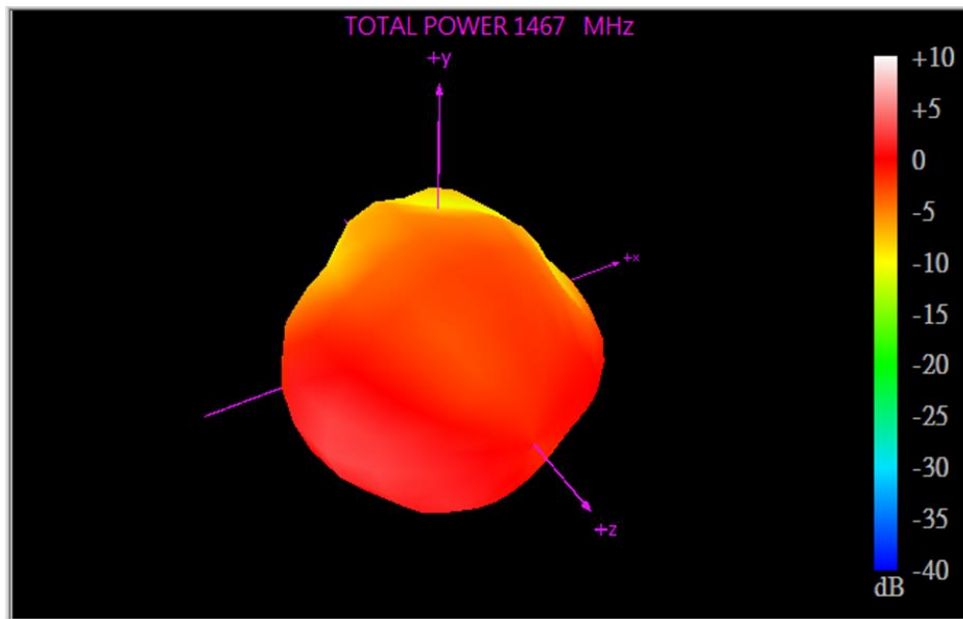



1805MHz

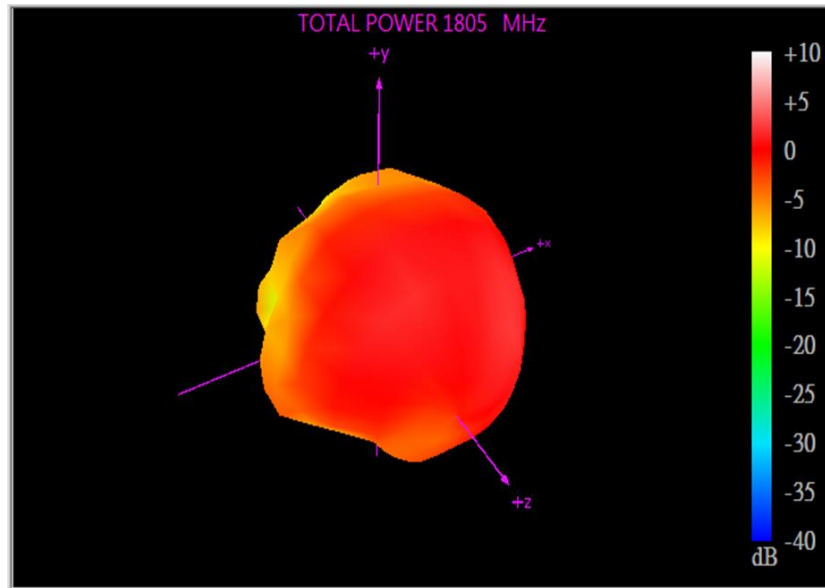


XY Plane      XZ Plane      YZ Plane

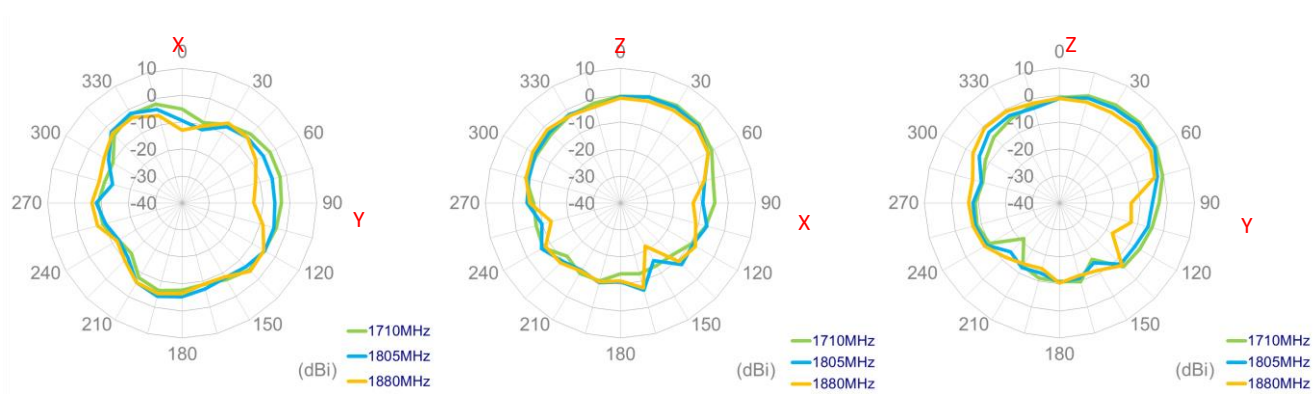




1920MHz

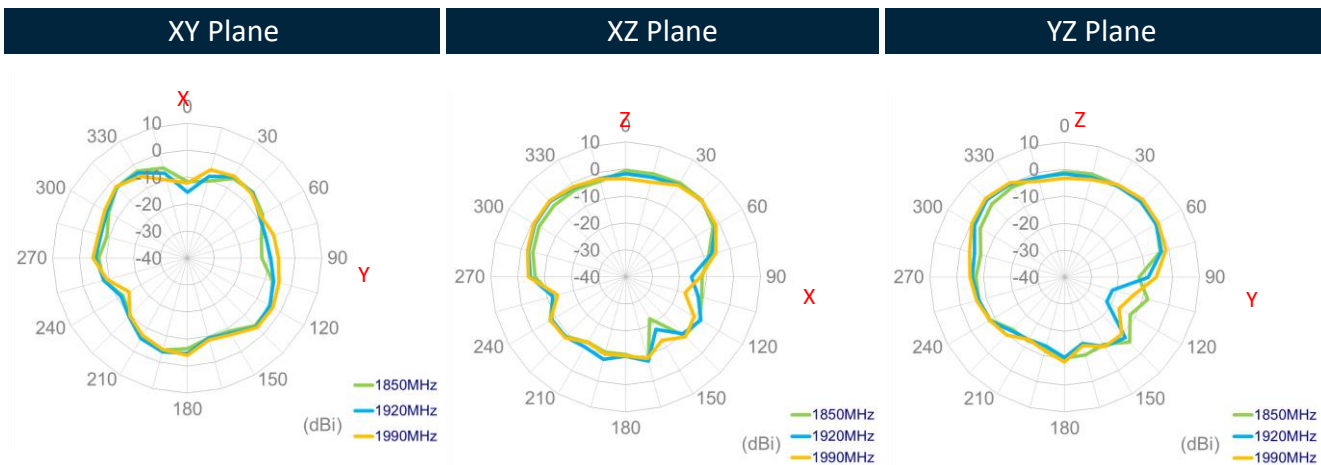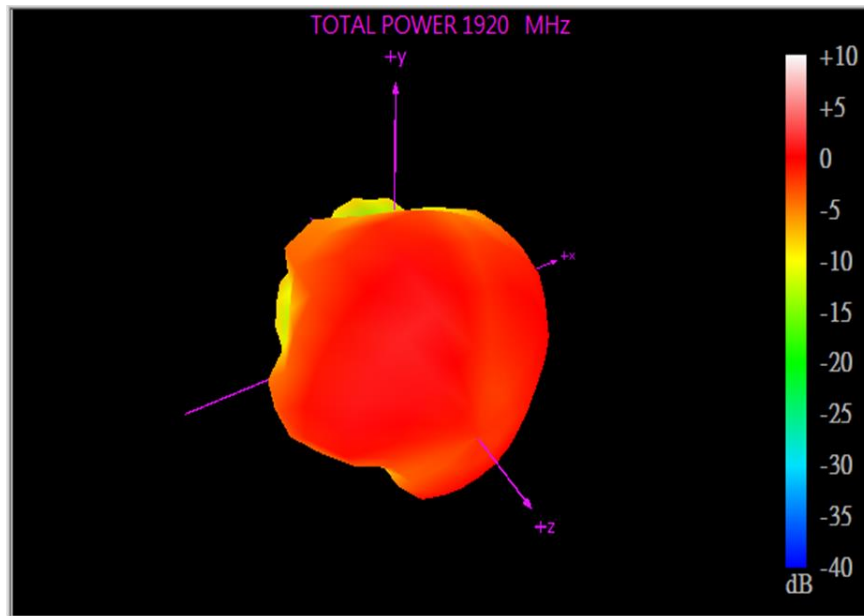


2010MHz

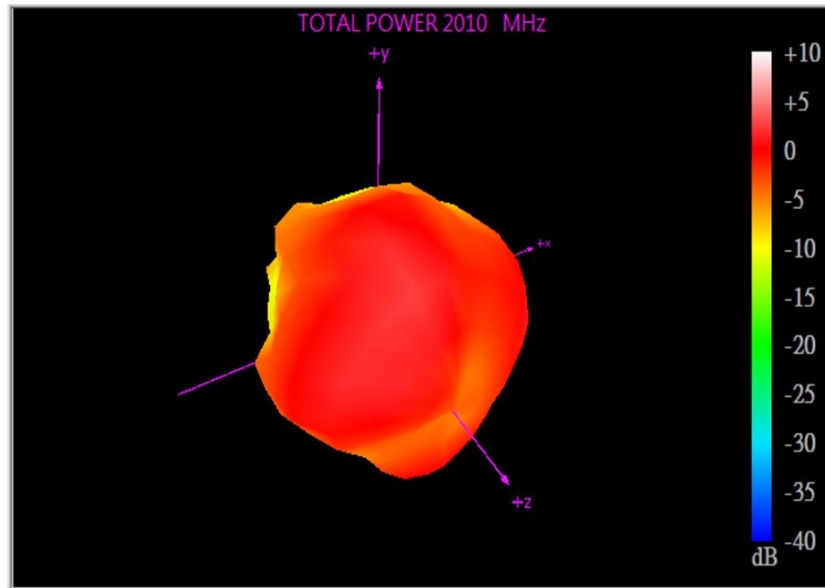


XY Plane      XZ Plane      YZ Plane

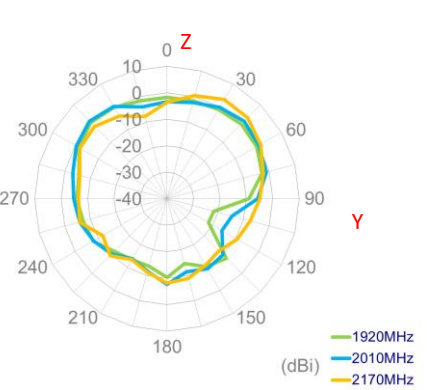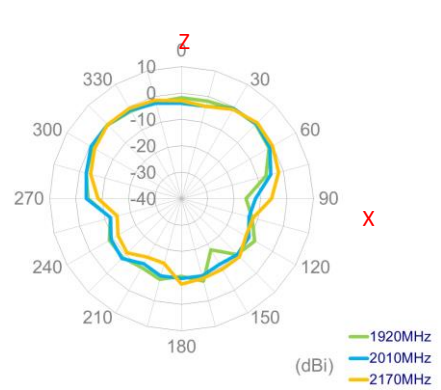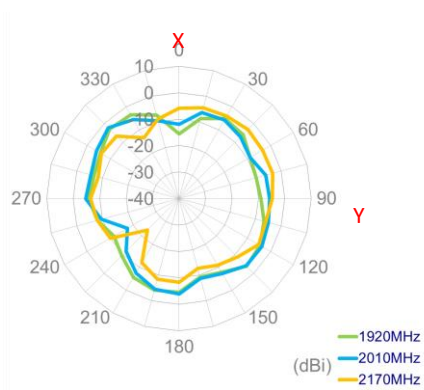


2500MHz

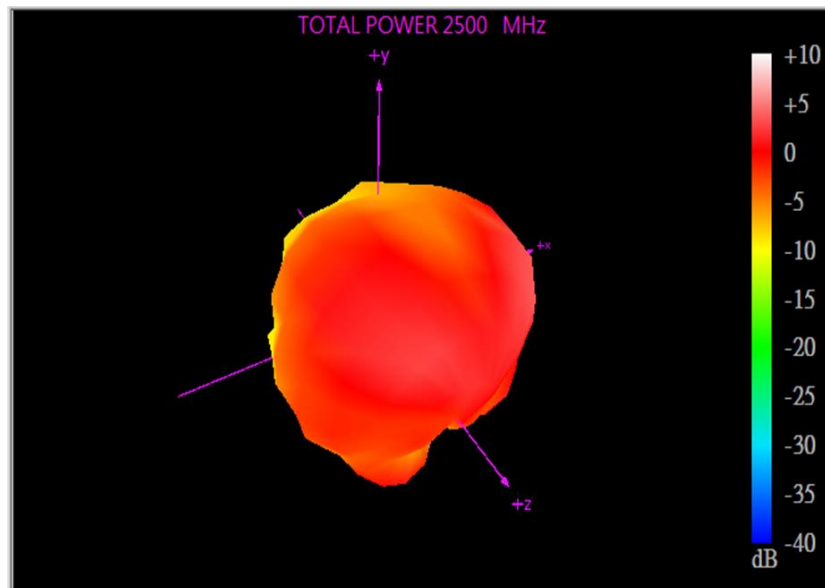




XY Plane	XZ Plane	YZ Plane
----------	----------	----------

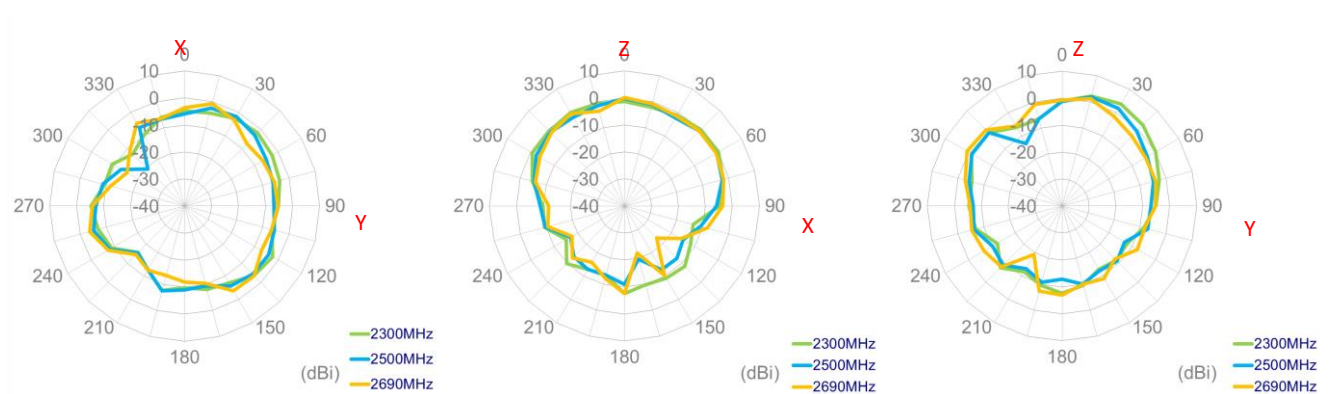



3400MHz

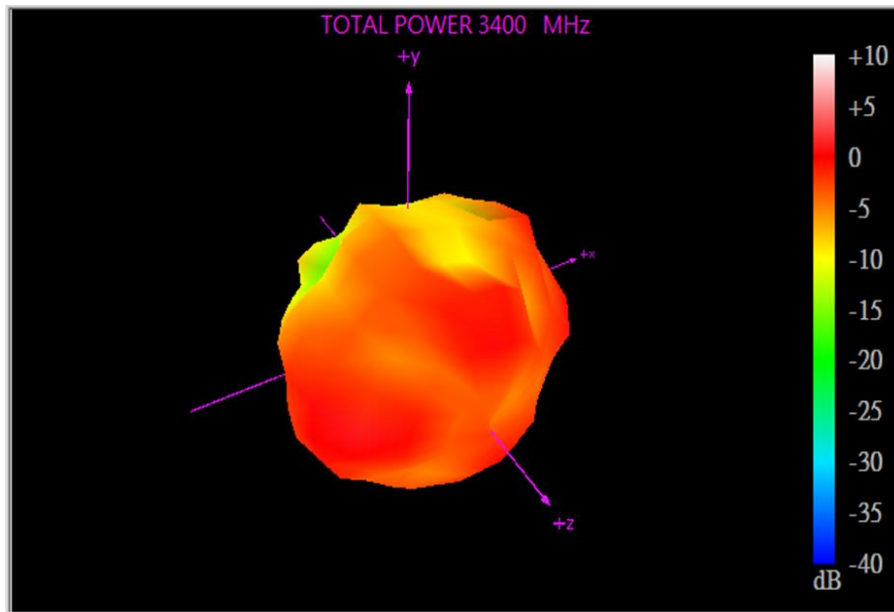

XY Plane      XZ Plane      YZ Plane

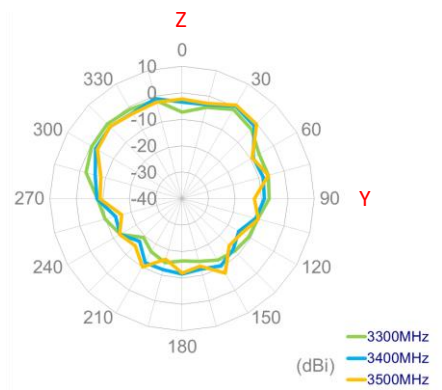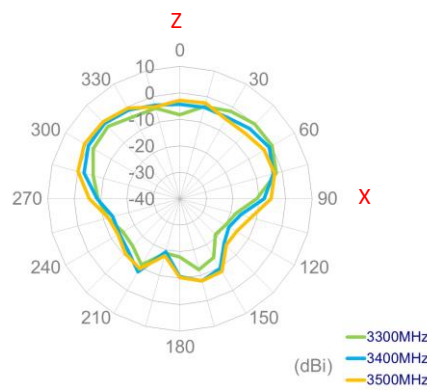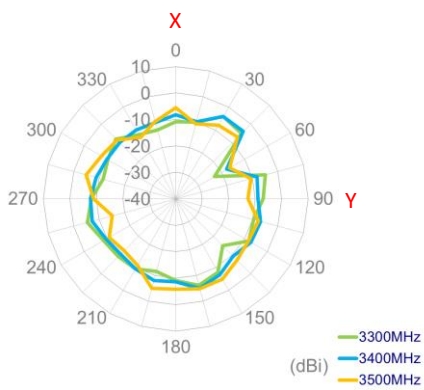


5550MHz

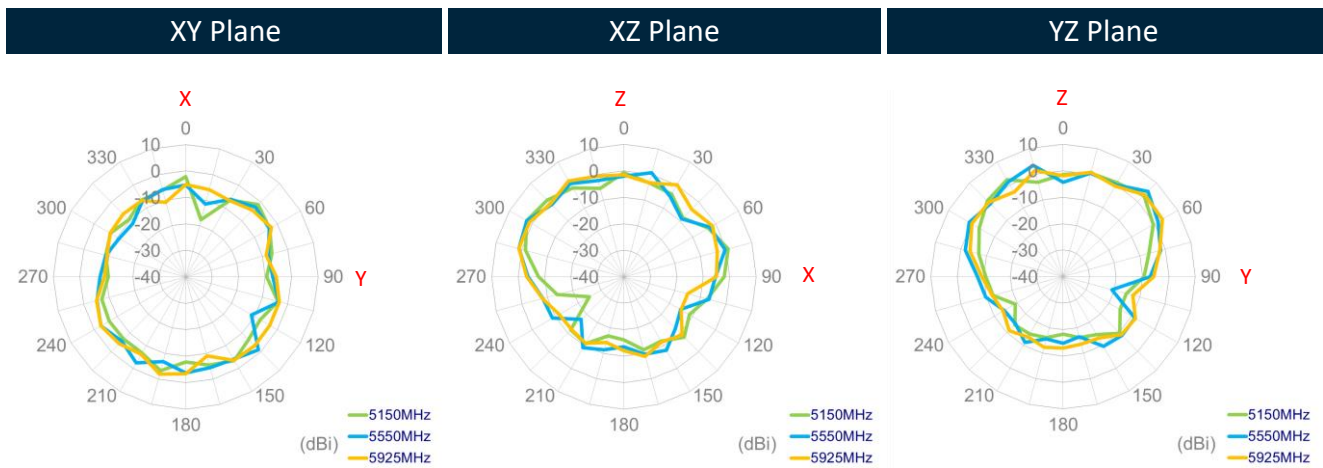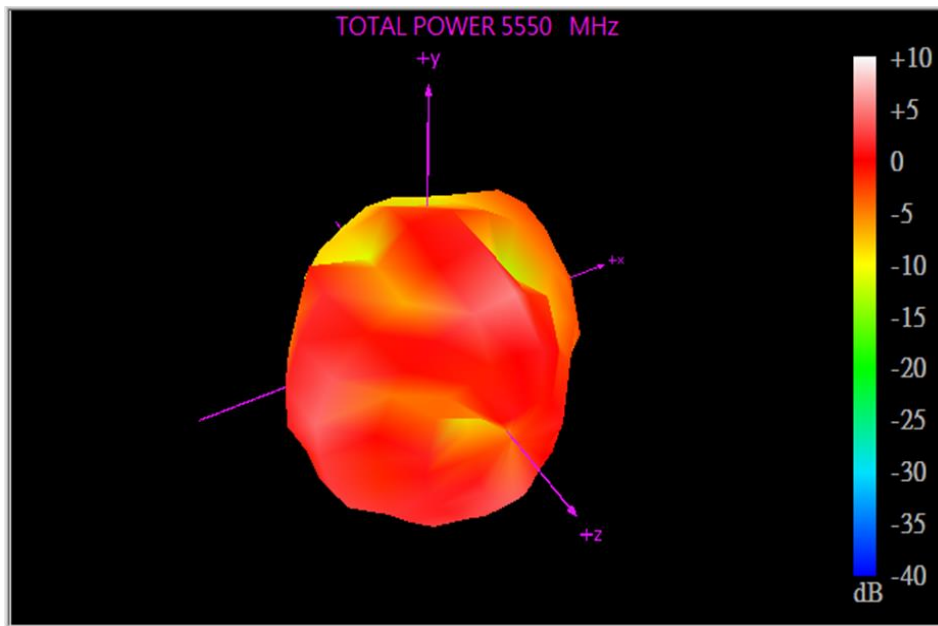



## 5.4 Wi-Fi MIMO 1 Radiation Pattern




2450MHz

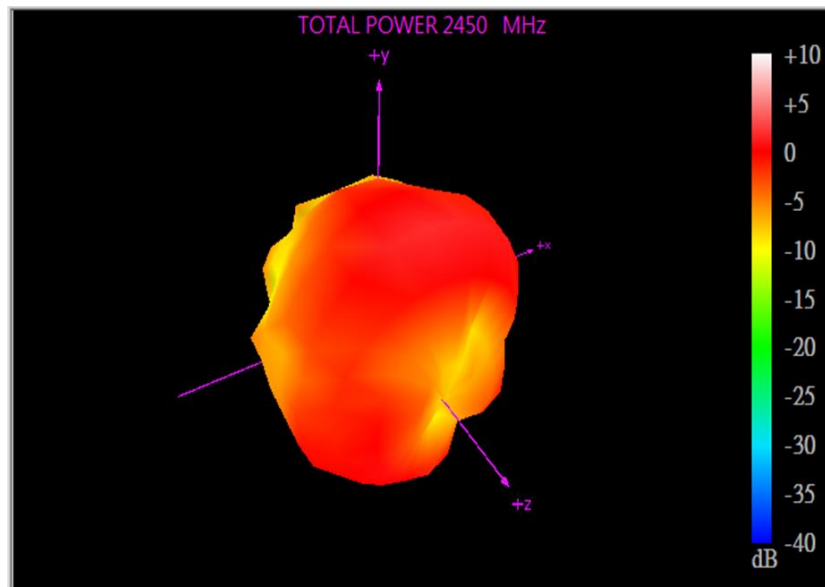



XY Plane

XZ Plane

YZ Plane

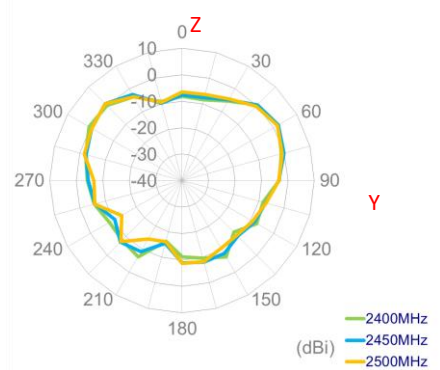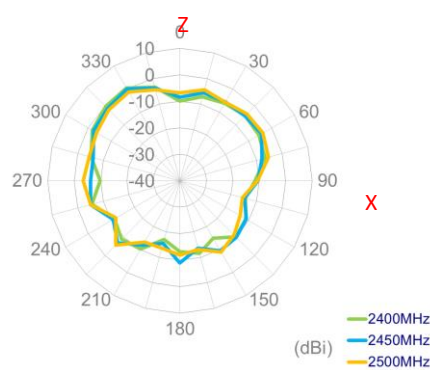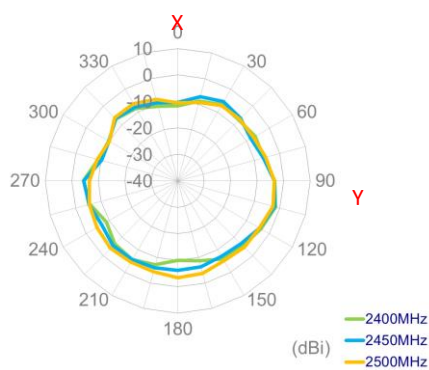


5550MHz

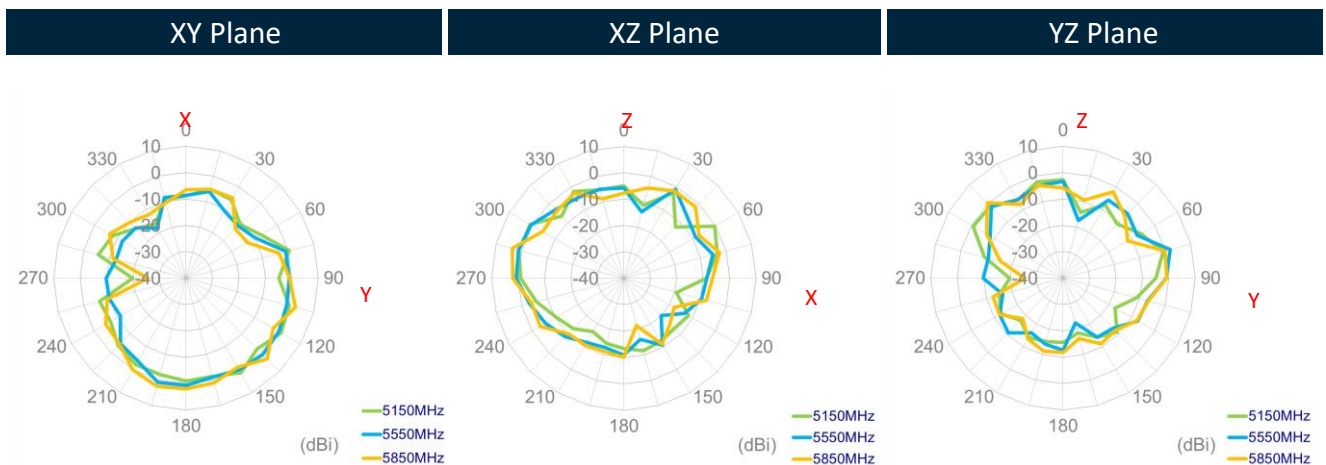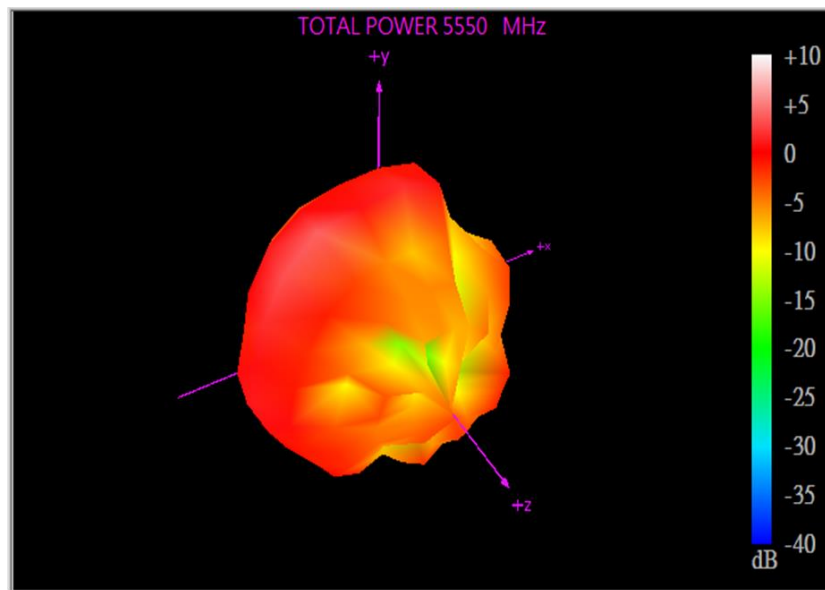


## 5.5 Wi-Fi MIMO 2 Radiation Pattern


2450MHz

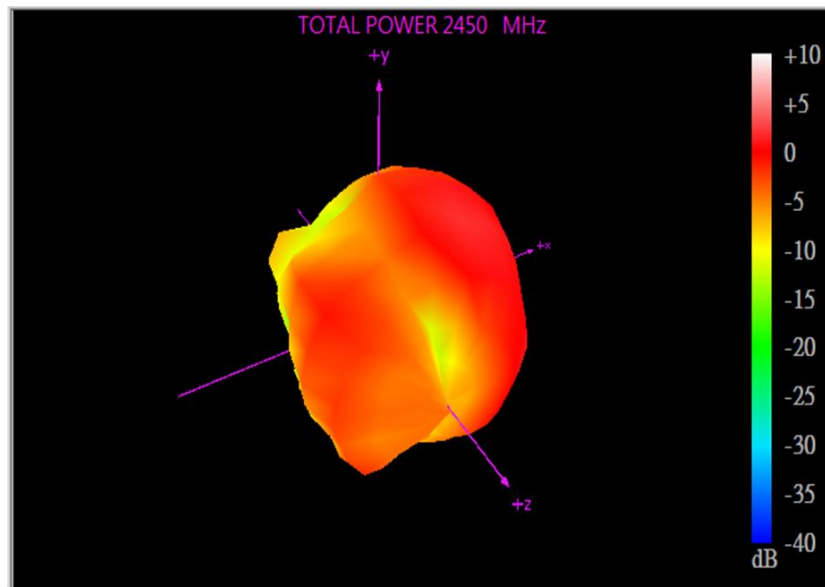


XY Plane

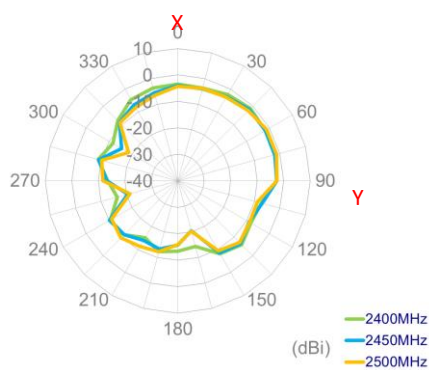


XZ Plane

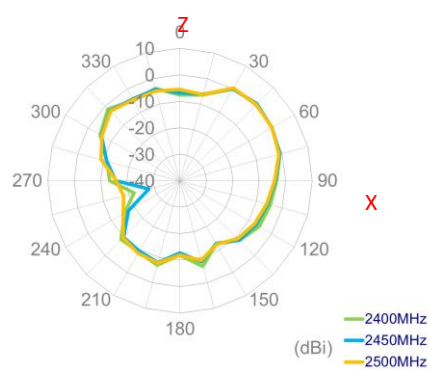


YZ Plane

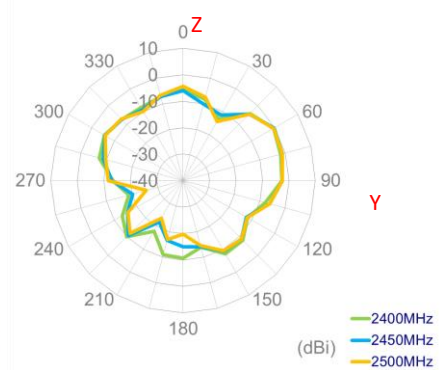

5550MHz

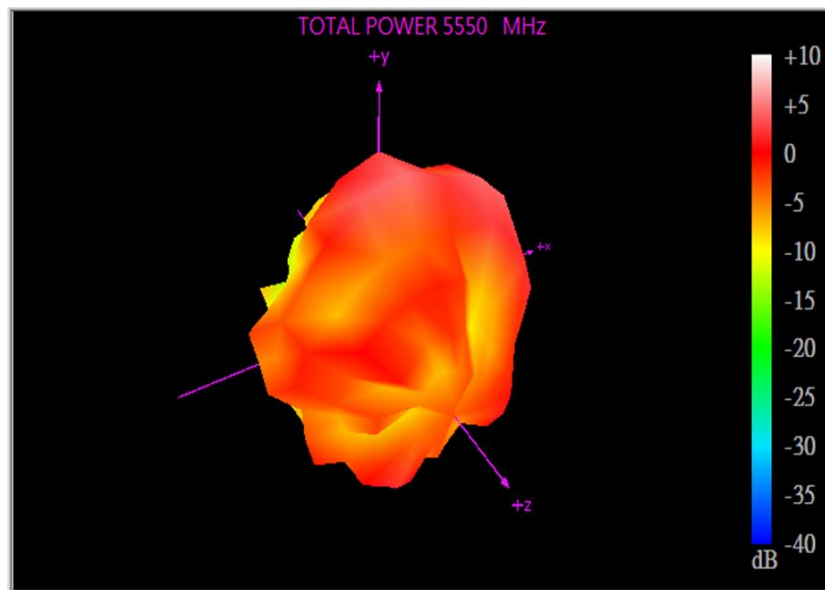


XY Plane      XZ Plane      YZ Plane

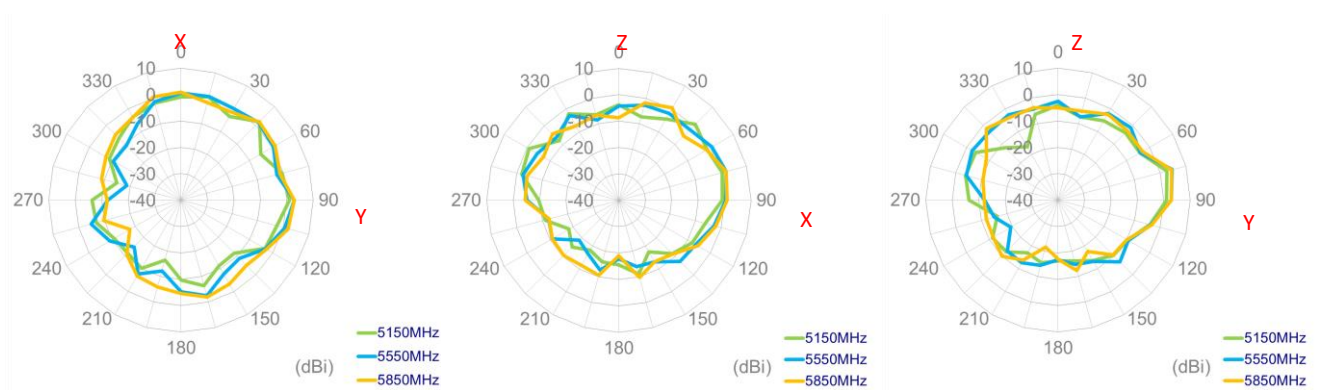


5.6 Wi-Fi MIMO 3 Radiation Pattern



2450MHz

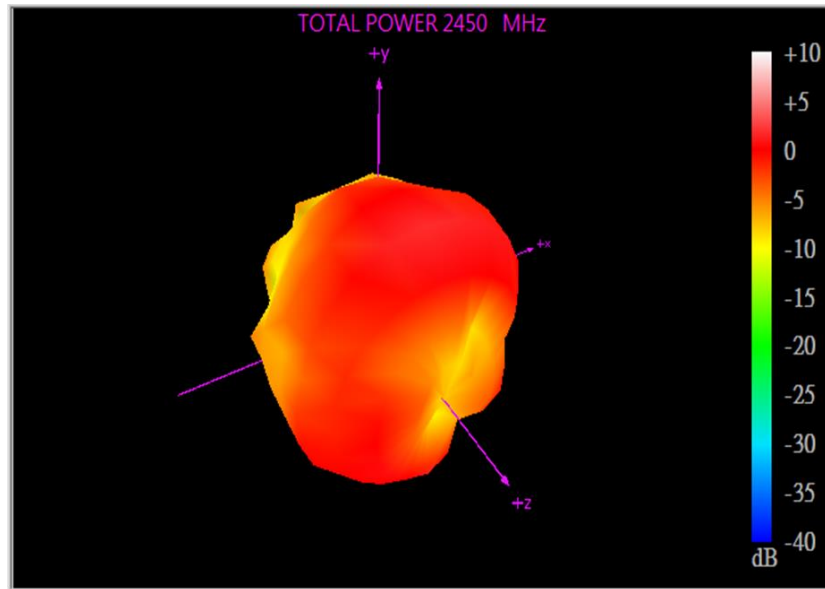

XY Plane      XZ Plane      YZ Plane

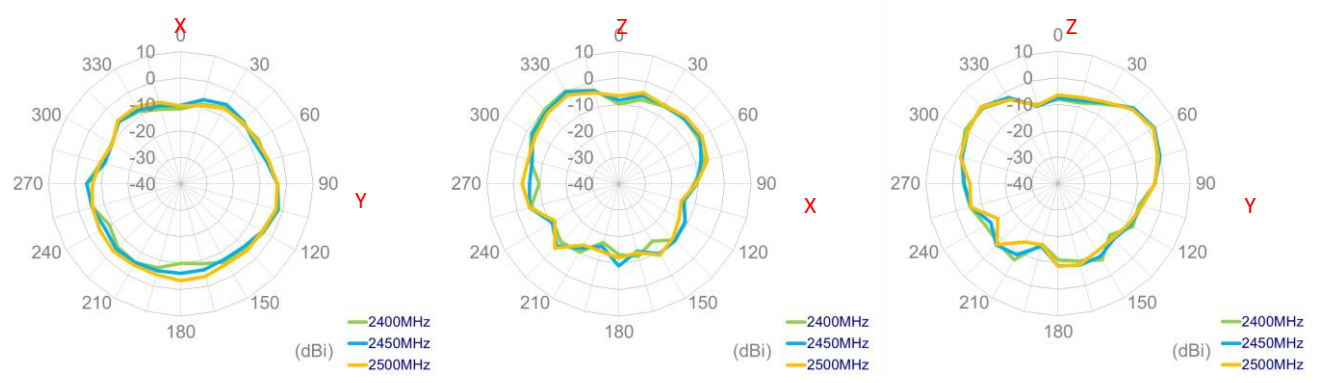

5550MHz

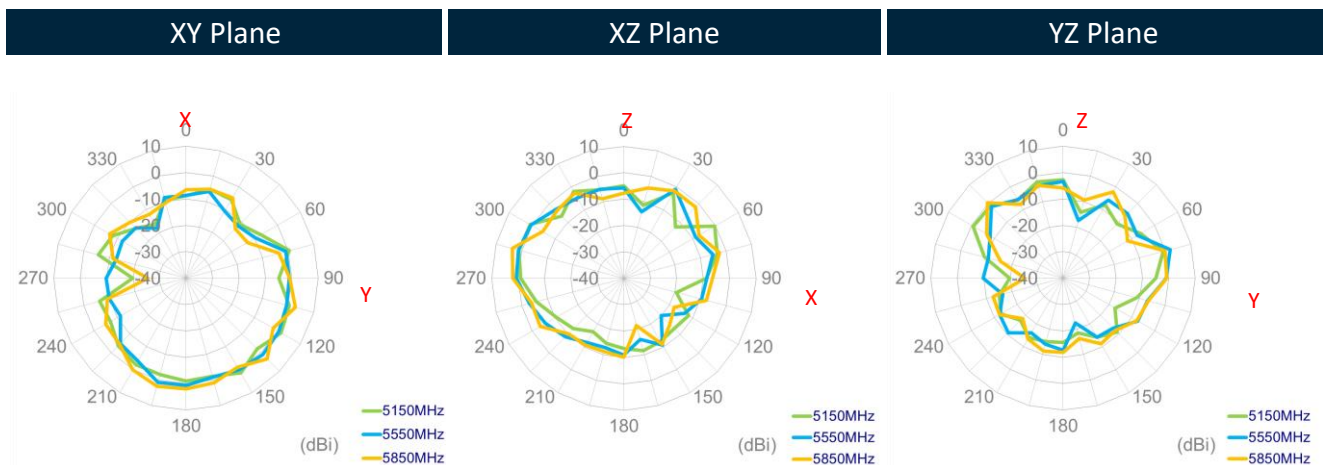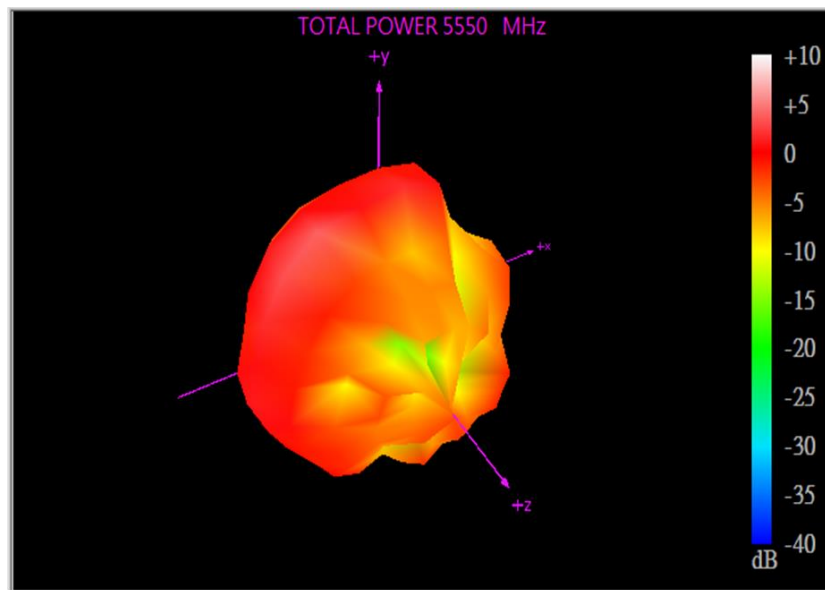

# 6. Mechanical Drawing (Units: mm)

6	5	4	3	2	1		
ISO NO: EDW-19-8-1234		REV	ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE
<Release>		01	ALL	Initial Design	Ruby	Aaron	2019/09/05
		02	ALL	Modify the Bom and the cable length	Ruby	Aaron	2019/12/26

**Top View**

$\phi 161 \pm 1.8$

**Front View**

55±1.8  
14.5±1.1  
20.5±1.1

**Bottom Thread View**

WI-FI-1  
46/50-1  
WI-FI-2  
WI-FI-3  
Epoxy  
GNS

**Detail A**  
Scale: 2.5:1  
1/4-36UNS-2B

**Detail B**  
Scale: 2.5:1  
1/4-36UNS-2B

**Detail C**  
Scale: 2.5:1  
1/4-36UNS-2B

**Notes:**

1. All material must be RoHS compliant.

UNLESS OTHERWISE SPECIFIED TOLERANCES ON:  
 .X ± 0.2  
 XX ± 0.5 .XX ± 0.1  
 X ± 0.3 .XXX ± 0.05

DATE: 2019/09/05  
 UNIT: mm  
 THIRD ANGLE PROJECTION

MAT'L:  
 FINISH:  
 SCALE: 1/2.5


APPROVED BY: AARON  
 CHECKED BY: AARON  
 DRAWN BY: RUBY  
 CUSTOMERS SIGNATURE / DATE

QTY	NAME	P/N	MATERIAL	FINISH
1	Top Plastic Shell	0001186080000A	PC	Black / Grey
1	Bottom Plastic	0001186100000A	PC	Black
1	Double Sided Adhesive	0010190010000A	EXCEL 948 2.5	Black Foam/White Liner
1	Nut_M22	000418H020000A	Nylon	Black
1	Rubber	000718H010000A	Silicone Rubber	Black
6	RG174 Coaxial Cable (MA1506.A.001)	301315C000000A	PVC	Black
1	RG174 Coaxial Cable (CAB.0394)	301315C000000A	PVC	Black
1	Empty Label	001015G000000A	PEPA	White
1	Barcode Label	001015G010000A	PET	White
1	Heat Shrink Tube (GNS)	001316C000000A	PE	Blue Tube/White Text
1	SMA(M)ST	2002160000098A	Brass	Au Plated
5	TGC-200 Coaxial Cable	306718E000000A	PE	Black
1	Heat Shrink Tube (46/50-1)	001319G050000A	PE	Red Tube/White Text
1	Heat Shrink Tube (46/50-2)	001319G060000A	PE	Red Tube/White Text
1	Heat Shrink Tube (WI-FI-1)	001316L060000A	PE	Yellow Tube/Black Text
1	Heat Shrink Tube (WI-FI-2)	001316L070000A	PE	Yellow Tube/Black Text
1	Heat Shrink Tube (WI-FI-3)	001316L090000A	PE	Yellow Tube/Black Text
2	SMA(M)ST	2002160020098A	Brass	Au Plated
3	SMA(M)ST_RP	2002160030098A	Brass	Au Plated
1	Centenary Braid	001313A000048A	ESPET	Black
2	Heat Shrink Tube	001319B080000A	PE With Glue	Black


  

6	5	4	3	2	1
A		REV		D02	
TITLE. : Synergy 6in1 5000mm (MA1506.A.001 braided with cable assemblies)		PART NO. : MA1506.AK.001			


## 7. Packaging

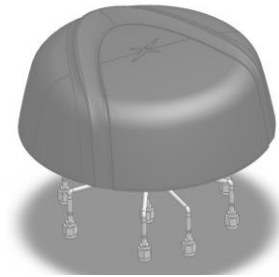

1pc MA1506.AK.001 per PE Bag  
Weight: 2.1Kg

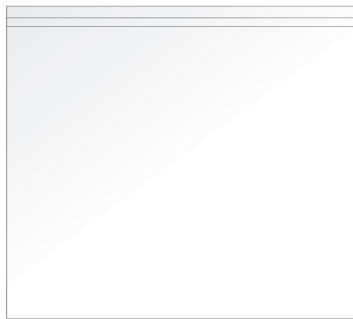

4pcs MA1506.AK.001 per Carton  
Carton Dimensions: 740\*370\*300mm  
Weight: 9.3Kg

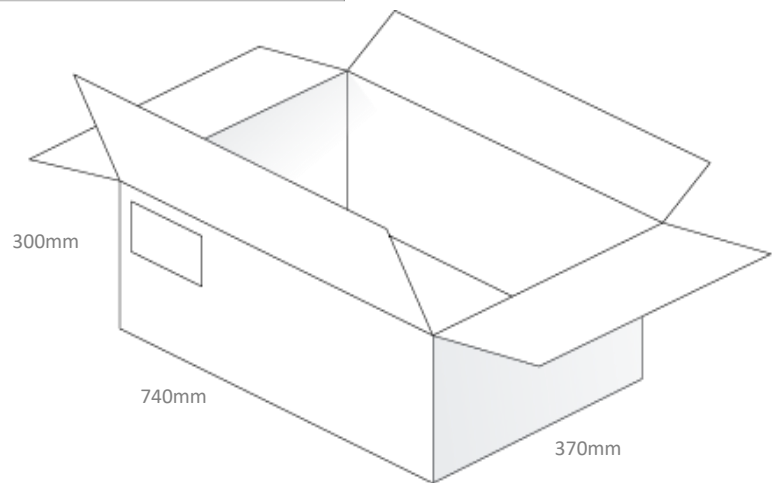



Changelog for the datasheet

**SPE-20-8-001 - MA1506.AK.001**

<b>Revision: C (Current Version)</b>	
Date:	2023-07-05
Changes:	Updated Mechanical Specifications
Changes Made by:	Cesar Sousa

**Previous Revisions**

<b>Revision: B</b>	
Date:	2020-05-15
Changes:	Updated Wi-Fi Peak Gain Data
Changes Made by:	Jack Conroy

<b>Revision: A (Original First Release)</b>	
Date:	2020-01-06
Notes:	Initial Release
Author:	Jack Conroy



**TAOGLAS**®

[www.taoglas.com](http://www.taoglas.com)